EC 2 . 1989

607-F
287

(1) I 72.12/2:89-0021

OCS Study
(4) MMS 89-0021

(2) Petroleum Structures as Artificial Reefs: A Compendium

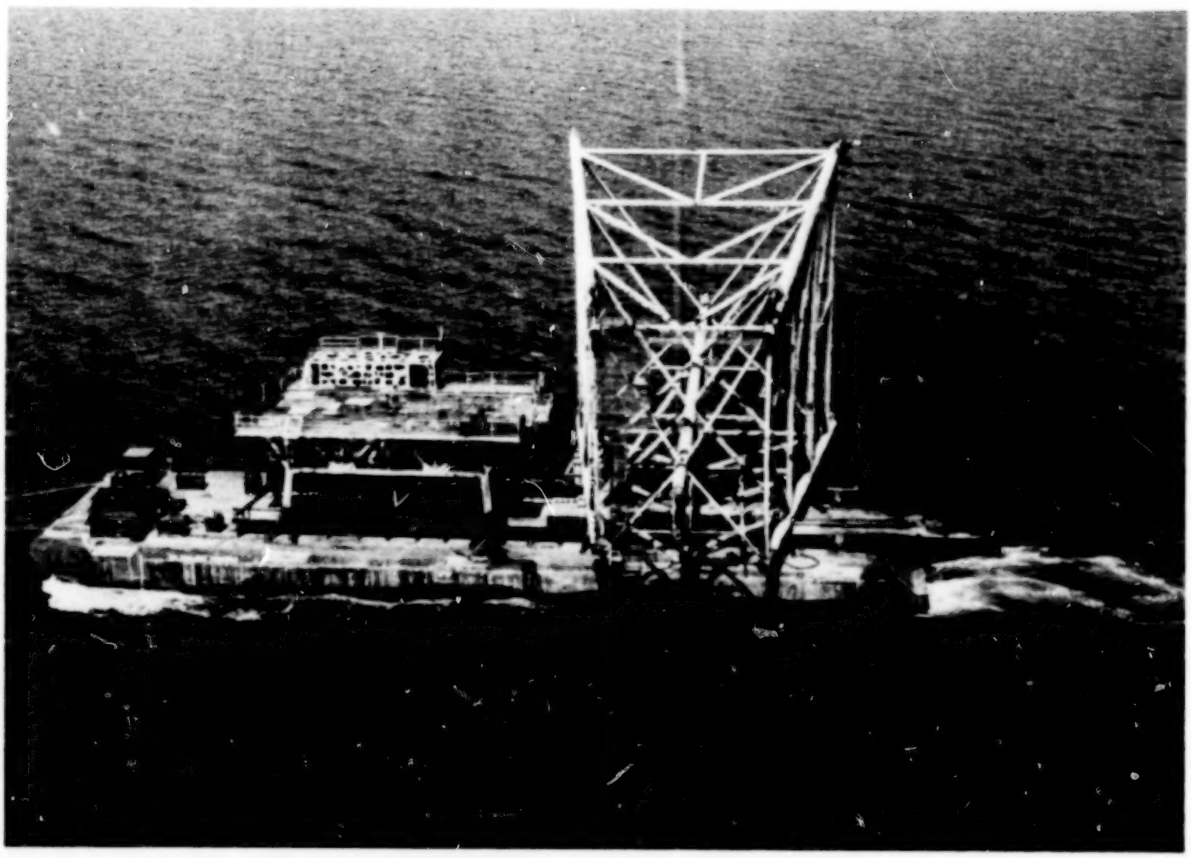

COMPLETED

(6) August 1989

(5)
MMS U.S. Department of the Interior
Minerals Management Service
Gulf of Mexico OCS Region

190 pgs

OCS Study
MMS 89-0021

Petroleum Structures as Artificial Reefs: A Compendium

Fourth International Conference
on Artificial Habitats for Fisheries
Rigs-to-Reefs Special Session
Miami, Florida

November 4, 1987

Compiler

Villere C. Reggio, Jr.
Minerals Management Service
Gulf of Mexico OCS Region

Published by

U.S. Department of the Interior
Minerals Management Service
Gulf of Mexico OCS Regional Office

New Orleans
August 1989

II

DISCLAIMER

The opinions, findings, conclusions, or recommendations expressed in this report are those of the authors and do not necessarily reflect the views of the Minerals Management Service (MMS) unless so designated by other authorized documents.

Most of the papers in this report underwent peer review and some were revised by the authors subsequent to the conference. All were subjected to the technical editing guidelines of MMS.

This report should be cited as follows:

Reggio, V. C., Jr., comp. 1989. Petroleum structures as artificial reefs: a compendium. Fourth International Conference on Artificial Habitats for Fisheries, Rigs-to-Reefs Special Session, November 4, 1987, Miami, Fla. OCS Study/MMS 89-0021. 176 pp.

CONTENTS

Page

Preface and Acknowledgements vii

Part I: Introduction

Overview
Villere C. Reggio, Jr., and Dana Larson 1

Offshore Oil Platforms: Mini-Ecosystems
Paul K. Driessen 3

Part II: Planning Considerations in Evaluating the Use of Petroleum Structures as Permitted Artificial Reefs

Development of the Louisiana Artificial Reef Program
Charles A. Wilson and Virginia R. Van Sickle 7

Utilization of Offshore Platforms by Recreational Fishermen and Scuba Divers off the Louisiana Coast
David R. Stanley and Charles A. Wilson 11

Geological and Geotechnical Aspects of Artificial Reef Site Selection, Offshore Louisiana
David L. Pope and Thomas F. Moslow 25

Factors Influencing Community Structure and Fish Stocks on Offshore Platforms
Ann L. Holmquist 45

Some Comparisons Between Communities Beneath Petroleum Platforms off California and in the Gulf of Mexico
Ann Scarborough-Bull 47

Technical Aspects of Converting Offshore Petroleum Platforms to Artificial Reefs
Thomas N. Carr and Raymond J. Moore 51

Platform Removal: Reuse, Reef, or Scrap?
John A. Gilmore and R. R. Canady 69

Rigs-to-Reefs—A Case History
James C. Quigel and Win L. Thornton 77

Page

Impacts of the Explosive Removal of Offshore Petroleum Platforms on Turtles and Dolphins
Edward F. Klima, Gregg R.Gitschlag, and Maurice L. Renaud 89

The Relationship of Rigs-to-Reefs to U.S. Environmental Conservation Law
Suzanne Iudicello 113

Part III: View of Petroleum Structures as Dedicated Fisheries Habitat for Fish, Fishing, and Fisheries Development in North America and Northwest Europe

From Offshore Oil to Offshore Fishing
Michael D. Zagata 125

Early Fish Assemblages on Tenneco II Reef, South Florida
William Seaman, Jr., William J. Lindberg, and Carter R. Gilbert 127

An Evaluation of Rigs-to-Reefs in Fisheries Development
Joseph M. McGurrin and Anthony J. Fedler 131

Mariculture on Offshore Oil Development and Production Platforms
Robert P. Meek 139

Rigs-to-Reefs as an Alternative to Platform Salvage
C. Fred Stelzer, Jr. 143

Rigs-to-Reefs in the North Sea
Gordon B. Picken and Alasdair D. McIntyre 155

Artificial Reef Observations from a Manned Submersible Off Southeast Florida
Eugene A. Shinn and Robert I. Wicklund 161

Part IV: Panel on National and International Possibilities and Concerns Related to Use of Petroleum Structures for Fisheries Enhancement

Panel on National and Internatioal Possibilities and Concerns Related to Use of Petroleum Structures forFisheries Enhancement
Dana Larson 175

PREFACE AND ACKNOWLEDGEMENTS

Interest in the use of oil and gas structures for artificial reefs has increased significantly in the past 10 years, especially after passage of the National Fishing Enhancement Act of 1984 and publication of the National Artificial Reef Plan in late 1985. Consequently, the Minerals Management Service offered to play a major role in planning, organizing, and chairing a special session on Rigs-to-Reefs at the Fourth International Conference on Artificial Habitats for Fisheries held November 2-6, 1987, in Miami, Florida. Realizing that the legal, technical, social, economic, and biological ramifications of converting offshore structures to permitted artificial reefs were of keen interest to artificial reef developers, fisheries administrators, scientists, and fishermen, we attempted to organize a session that offered a broad view of Rigs-to-Reefs concerns and potentials. Practical information and expert opinion from a broad spectrum representing government, industry, academia, environmental groups, and the private sector were presented and are included in these proceedings in varying formats made available by the authors or session moderators. It is our hope that a complete and separate compendium devoted strictly to the proceedings from the special Rigs-to-Reefs session will facilitate dissemination and use of this information by those interested in the conversion of petroleum structures for fisheries enhancement and development.

In addition to the presenters and their co-authors identified in the body of this document, we are indebted to the conference chairman, Dr. William Seaman, and his steering committee for supporting and encouraging the development of a special Rigs-to-Reefs Session at this conference; to Dana Larson of The Rigs-to-Reefs Company for committing his influence, reputation, and assistance in organizing, promoting, and cochairing this special session; to Greg Ulrich of Amoco and William Dubose of the National Ocean Industries Association for moderating subsessions; and we are especially grateful to the Offshore Operators Committee, the Amoco Foundation, and the Minerals Management Service for cosponsoring the conference.

Additional copies of this compendium are available from the Minerals Management Service, Gulf of Mexico OCS Region, Public Information Unit (OPS-3-4), 1201 Elmwood Park Boulevard, New Orleans, Louisiana 70123-2394 or by telephone (504) 736-2519 or (FTS) 680-2519.

Overview

Mr. Villere C. Reggio, Jr.
Minerals Management Service
Gulf of Mexico OCS Region
New Orleans, Louisiana
and
Mr. Dana Larson
The Rigs-to-Reefs Company
Houston, Texas

The discovery and production of oil and gas offshore the states of Texas and Louisiana have dramatically changed the focus and range of offshore fishing in the Gulf of Mexico. Between construction of Kerr-McGee's offshore platform in 18 feet (ft) of water in 1947 (Ship Shoal Block 32) and the installation of Shell's Cognac platform breaking the 1,000-ft depth contour in 1978 (Mississippi Canyon Block 194), approximately 4,000 offshore oil and gas production platforms have been attracting fish and fishermen in a special fishery extending from the Mississippi River Delta to an area offshore Padre Island National Seashore. When these platforms are situated within the range of commercial fishermen, recreational fishermen, and scuba divers, they frequently become the location of choice for better fishing. Logically, this symbiotic relationship resulted because production platforms function as easily locatable artificial habitats. Other countries with offshore petroleum production and an abiding interest in their renewable fishery resources have also begun to explore the fisheries' conservation and development potential of offshore structures.

Recognizing the benefits of artificial reefs to marine fishing, the U.S. Congress enacted the National Fishing Enhancement Act of 1984 (Title 11, P.L. 98-623) encouraging the planned development of artificial reefs in U.S. waters. The National Artificial Reef Plan, spawned by this new law, identified oil and gas structures as materials of opportunity potentially suitable for artificial reef development in offshore waters.

In 1985 the Minerals Management Service (MMS) adopted a policy that encourages the planned use of obsolete oil and gas structures for artificial reefs. Many coastal states and several oil and gas companies expressed interest in the use of petroleum structures on artificial reef sites. Louisiana has taken the lead in establishing and implementing a program aimed at converting rigs to reefs in waters extending from 15 miles to more than 100 miles off its coastline.

In line with its artificial reef policy statement, MMS played a major role in supporting, organizing, and conducting the Rigs-to-Reefs Session at the Fourth International Conference on Artificial Habitats for Fisheries. Over 350 participants from 19 countries attended the Conference held in Miami, Florida, in November 1987. These proceedings are published to share this information with anyone interested in the potential, limitations, and concerns of making permitted reefs from petroleum structures. The presented papers address some of the physical, biological, socioeconomic, technological, and legal aspects of capturing the fisheries potential of producing petroleum platforms and of converting obsolete oil and gas structures to reefs. The range of views and experiences presented at the conference is hereby recorded, as submitted by the authors or panel moderators and prepared for publication by MMS.

BLANK PAGE

Offshore Oil Platforms: Mini-Ecosystems

Mr. Paul K. Driessen
Minerals Management Service
Washington, D.C.

Background

To provide a general overview of the important role offshore petroleum production platforms play as artificial reefs, a slide presentation was developed featuring 100 slides of marine life under oil rigs. The presentation is also available as an 18-minute VHS video tape.

Biology of Oil Platforms

For several decades, World War II Liberty ships, tires, railroad cars, concrete culverts and even toilets, cement-filled beer cases, a "Mercedes" and a Rolls Royce have been used as artificial reefs in the United States. However, the largest and perhaps best man-made reef system in the world is composed of some 4,000 petroleum production platforms off the coasts of California, Texas, and especially Louisiana.

During 1986, these platforms produced enough oil to run 35 million cars and enough natural gas to heat 40 million cold-weather homes for the entire year. In the process, they also increased local algal and invertebrate biomass, attracted large numbers of pelagic fish, and increased local production of many other species of fish.

A single 200-ft (61 m) platform jacket provides several acres of hard substrate that fosters the growth of sessile algae, barnacles, mussels, anemones, and other attached organisms; a platform standing in 800-900 ft (250-275 m) of water provides several dozen acres. These organisms create hiding places for small fish and invertebrates, form the base for a highly complex food chain, and provide excellent breeding grounds.

These artificial reefs are especially important off Louisiana, where the Mississippi River annually deposits some 300 million tons (272 million metric tons) of silt and sand. Indeed, the oil rigs provide virtually all the hard-bottom habitat off the Bayou State in waters less than 400 ft (120 m) deep. However, they also play a vital role in the Santa Barbara Channel, where four rivers discharge an average of 5 million tons (4.5 million metric tons) of sediment a year--or as much as 24 million tons (22 million metric tons) on a single day (February 25, 1969) from the Santa Clara River alone.

Twenty to fifty times more fish can be found under and near oil platforms than in nearby soft bottom areas. The jackets' open structure allows fish to move about freely and assures an uninterrupted flow of nutrients. The size and height of jackets provide navigational reference points for fish as well as shelter from currents and predators.

Because they actually create new ecological niches and greatly increase local carrying capacity and biomass--especially in the photic zone--platforms expand the numbers, range, size, and diversity of many highly desirable fish and shellfish, without reducing fish populations at other natural or artificial reefs. They allow species to expand their normal ranges and to exist in open ocean settings, far from land, where they had been unable to exist previously.

Numerous species of fish and invertebrates have been observed beneath Gulf of Mexico and California platforms in hatchling, juvenile, and nesting stages. LGL Ecological Research Associates reports that Gulf of Mexico rigs may serve as critical daytime

habitat for red snapper until they become large enough to escape the predatory food chain.

One of the most colorful and prolific platforms is Unocal's Platform Alpha, site of the 1969 Santa Barbara Blowout. Because it has never been scraped clean of biofouling organisms, it has achieved an almost climactic biological state and is covered by several feet of mussels, barnacles, scallops, anemones, and hydroids. Large schools of mackerel and other fish are common; species like rockfish, kelp bass, cabezons, and garibaldi fish have become permanent residents.

Recreational and Commercial Benefits

Some 70 percent of all saltwater sport fishing trips greater than three miles from the Louisiana coast are to oil rigs. They account for a significant portion of the $640 million in overall economic benefits estimated to result from licensed saltwater recreational fishing in that state.

Commercial longline boats come all the way from Florida to land $2 million annually in snapper, grouper, and mackerel from Louisiana and even Texas rigs. Commercial fish landings in the Gulf of Mexico have risen from 570 million tons (517 million metric tons) in 1950 to a record 2,500 million tons (2.268 billion metric tons) in 1985--even as the number of platforms increased from a few hundred to over 4,000 in the same period. Although much of this Gulf catch is menhaden, it also includes 80 percent of the nation's shrimp harvest, 40 percent of its oysters, and significant commercial hauls of seatrout, pompano, snapper, grouper, and mackerel.

Off California, Ecomar Marine harvests over 10,000 lb (4,500 kg) of succulent mussels from jacket legs every week for sale to restaurants in a half-dozen states. Tests by the U.S. Food and Drug Administration and California Department of Public Health have consistently found that the oil rig mussels contain much lower levels of oil, metals, and other pollutants than do mussels taken from California's cleanest bays.

The reason for these lower levels is that pollution from platforms has been greatly reduced by major regulatory and technological changes implemented in 1970. Between January 1971 and December 1986, America has produced over 5.5 billion barrels of oil from the Outer Continental Shelf, while spilling only 60,000 barrels in accidents--850 of them in blowouts.

During that same 16-year period, tankers lost nearly 2 million barrels; rivers carried over 25 million barrels into the Gulf of Mexico; natural seeps emptied over 2 million barrels into the Santa Barbara Channel; and municipal wastewater treatment plants from San Luis Obispo through San Diego discharged nearly 5.5 million barrels of oil, along with thousands of tons of phosphorus, pesticides, sludge, bacteria, metals, and chemicals. The city of Los Angeles' Hyperion Wastewater Treatment Plant alone discharged over 2 million barrels of oil and grease, 4 million tons (3.6 million metric tons) of sludge, and 10,000 tons (9,000 metric tons) of trace metals (e.g., cadmium, lead, zinc, copper, arsenic) during this period (tables 1-3).

Rigs to Reefs

The removal of almost half of the Gulf's oil structures during the next 15 years could mean Louisiana will lose the majority of its hard-bottom habitat by the end of the century, unless some of the rigs can be converted into permanent steel reefs. The high cost of rig removal (an estimated $7.5 billion by

2020) and the interest of other States in these reefs are also giving impetus to a new rigs-to-reefs program and efforts to resolve remaining issues and prevent the loss of these invaluable and irreplaceable habitats.

The Bayou State has already enacted rigs-to-reefs legislation and is actively engaged in siting the first platforms under its Louisiana Artificial Reefs Initiative. Texas has begun work on similar legislation.

Partial Bibliography

California State Lands Commission, County of Santa Barbara, and U.S. Army Corps of Engineers (Los Angeles District). 1986. Draft EAR/EIS on proposed ARCO Coal Oil Point project.

Continental Shelf Associates, Inc. 1982. Study of the effect of oil and gas activities on reef fish populations in the Gulf of Mexico OCS area. U.S. Dept. of the Interior. Bureau of Land Management OCS Office.

County Sanitation Districts for Los Angeles County. Joint water pollution control plan, monitoring and reporting program, annual monitoring report for 1985.

Dimitroff, F. 1982. Survey of snapper/grouper fishermen of the northwest Florida coast. In: Proceedings, third annual Gulf of Mexico Information Transfer Meeting. Metairie, La.: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. pp. 56-58.

Gallaway, B. J. 1984. Assessment of platform effects on snapper populations and fisheries. In: Proceedings, fifth annual Gulf of Mexico Information Transfer Meeting. Metairie, La.: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. pp. 130-137.

Simpson, R. A. 1977. The biology of two offshore oil platforms. Institute of Marine Resources, University of California. IMR Ref. 76-13.

U.S. Dept. of Commerce. National Oceanic and Atmospheric Administration. National Marine Fisheries Service. 1985. Fisheries of the United States. 1983. Current Fishery Statistics No. 8320.

Witzig, J. F. 1985. Rig fishing in the Gulf of Mexico--1984 marine recreational fishing survey results (preliminary report). National Marine Fisheries Service.

Mr. Paul K. Driessen was an analyst for the Minerals Management Service. In this capacity and as an active scuba diver and freelance writer, he pursues a strong interest in Rigs-to-Reefs issues. Mr. Driessen received his B.A. in geology and biology from Lawrence University in Wisconsin and his J.D. from the University of Denver College of Law. He has published articles on artificial reefs and offshore oil and gas issues in Sea Technology, the Miami News, Sea Frontiers, Petroleum Management, and the proceedings of the Coastal Zone '85, Oceans '86, and Coastal Zone '87 Conferences. He is a member of the American Fisheries Society and CEDAM International. Mr. Driessen is now President of PKD Associates--an energy, natural resources, ecology, and public relations company--in Annadale, Virginia.

Table 1

Sources of Oil Pollution in U.S. Waters (barrels)
January 1, 1971 - December 31, 1986
(OCS = Outer Continental Shelf)

Accidental spill on the California OCS	100
OCS blowouts (none in California)	850
Providence, RI, motorists changing own crankcase oil and disposing it improperly	4,800
California OCS operations (all causes)	26,600
OCS operations throughout the U.S. (spills)	64,000
Tankers (crude oil and product)	2,000,000
Los Angeles' Hyperion Wastewater Treatment Plant	2,100,000
California natural oil seeps	2,400,000
13 California wastewater treatment plants (San Luis Obispo through San Diego)	5,000,000
Rivers emptying into the Gulf of Mexico	25,000,000

Table 2

Southern California Drilling Discharges (tons)
January 1, 1971 - December 31, 1986
(Based on actual drilling footage for 653 wells)

Total drilling fluids and cuttings	485,000
• Water and bentonite clay	267,000
• Barite	184,000
• Well cuttings (rock chips)	19,000
• Lignite (soft coal)	5,000
• Chrome lignosulfonate	5,000
• Miscellaneous chemicals	5,000

Table 3

Southern California Coastal Pollution by Source (tons)
January 1, 1971 - December 31, 1986

Total drilling fluids and cuttings	485,000
• Chemicals of greatest concern	2,000
Hyperion Wastewater Treatment Plant (Los Angeles)	
• Sludge and suspended solids	4,7000,000
• As, Ca, Cr, Cu, Pb, Ni, Ag, Zn, etc.	10,000
13 treatment plans (San Luis Obispo - San Diego)	
• Suspended solids	4,100,000
• As, Ca, Cr, Cu, Pb, Ni, Ag, Zn, etc.	29,000
Pollution discharges from 4 southern California rivers	
• Silt and sand	65,000,000
• Oil and trace metals from 4 southern California rivers	???
• Pesticides, fertilizers, and bacteria	???

Development of the Louisiana Artificial Reef Program

Dr. Charles A. Wilson
Coastal Fisheries Institute
Center for Wetland Resources
Louisiana State University
Baton Rouge, Louisiana
and
Ms. Virginia R. Van Sickle
Louisiana Geological Society
Louisiana State University
Baton Rouge, Louisiana

Soon after the first oil and gas production platforms were installed off Louisiana in the late 1930's, fishermen realized that the structures abounded in fishery resources. As the destination of up to 75 percent of all fishing trips off Louisiana, public use of the waters directly associated with these platforms became a way of life and so commonplace that many citizens and management groups believed that they were "permanent" and would always be available. However, this was not the case. The Marine Board of the National Research Council reported that 470 structures had already been removed from Louisiana's coast by 1985, and that, by the year 2000, 40 percent (1,625) of the remaining oil and gas structures in the Gulf of Mexico will have been removed (Lee, 1985).

Concurrent with public concern over the loss of oil and gas structures, the National Fishing Enhancement Act (NFEA) of 1984, introduced by Congressman John Breaux, became law. The NFEA established national standards for the development of artificial reefs, called for the creation of a national artificial-reef plan under the leadership of the Department of Commerce, and provided for a government-coordinated, national permitting system for artificial reefs under the U.S. Army Corps of Engineers (COE). Particularly important to this program is Section 205 of the NFEA, which delineated and limited liability of the permittee and donors of materials used for artificial reefs.

Louisiana was at the point where it needed to recognize the potential loss of these structures and to plan to offset it either by creating new artificial-reef habitats or by preserving those that already exist under the guidelines outlined by the NFEA. For these reasons, an informal *ad hoc* group, the Louisiana Artificial Reef Initiative (LARI) was formed in 1985, consisting of university, State, Federal, and industry representatives, to institute an artificial-reef program for Louisiana.

The National Artificial Reef Plan, which was mandated by NFEA, was circulated around the time of LARI's formation. It provided guidance for planning, siting, constructing, permitting, installing, monitoring, managing, and maintaining artificial reefs and encouraged states to become involved in planning and developing artificial reefs within and seaward of state jurisdictions.

The NFEA laid the groundwork for states to develop artificial-reef programs. The need and mechanism for state programs were left up to individual states. In response, the participants of LARI developed criteria establishing a need for a state program.

The first step in developing a state reef program was to provide authority for the Louisiana program by establishing appropriate legislation. The Louisiana Fishing Enhancement Act (Act 100-1986), signed into law on June 25, 1986, provided for the following:

1. Establishment and administration of the Louisiana Artificial Reef Development Program.

2. Creation of the Louisiana Artificial Reef Council to oversee program activities.

3. Delineation of the roles of the participants.

4. Establishment of the Artificial Reef Development Fund to drive the program.

5. Establishment of the State of Louisiana as the permittee for artificial reefs developed under the plan and appointment of the Louisiana Department of Wildlife and Fisheries as agent for the State.

6. Relief for the State, donors, and other participants in the program from liability, provided that the terms and conditions of the Federal artificial reef permits are met.

7. Development of the Louisiana Artificial Reef Development Plan and for its legislative approval (Wilson et al., 1987).

In response to Act 100 and to assure proper program development, a plan was drafted. The plan contained the legal, technical, social, and economic aspects of permitting, constructing and maintaining artificial reefs in State and Federal waters off Louisiana (Wilson et al., 1987).

The State plan, approved by the Louisiana Artificial Reef Council and the Senate and House Natural Resources Committees after a series of public hearings throughout the Louisiana coastal area, has been implemented under the leadership of the Louisiana Department of Wildlife and Fisheries (LDWF).

Materials are to be evaluated for use as artificial reefs on a case-by-case basis by consensus of the Louisiana Artificial Reef Council. A donation agreement will then be signed by the Secretary of the LDWF or his designee and an authorized representative of the company, organization, or individual donating the reef material.

Artificial reefs will be sited within planning areas on the basis of the best available information regarding bottom type, currents, bathymetry, and other factors affecting the performance and productivity of a reef. The precise design and location of reef complexes will also depend upon the physical dimensions of the donated materials. Retired oil and gas structures will be the primary material available for reef construction off the Louisiana coast.

Pursuant to the Louisiana Fishing Enhancement Act, three entities will be the primary participants in Louisiana's Artificial Reef Program: the LDWF, the Louisiana Geological Survey (LGS) at LSU, and the Center for Wetland Resources (CWR) at LSU.

Acknowledgments

This paper contains excerpts from the Louisiana Artificial Reef Plan. The contents are the result of contributions by numerous individuals including members of the Louisiana Artificial Reef Initiative, the Louisiana Artificial Reef Council, and the Louisiana Legislature. Special appreciation is extended to the Louisiana Department of Wildlife and Fisheries for providing support funds (Louisiana Wallop/Breaux Grant F-54, Louisiana Artificial Reef Program).

This is Coastal Fisheries Institute Contribution No. 87-23.

References Cited

Lee, G. C. 1985. National Research Council study of the disposition of offshore petroleum platforms. In: Proceedings, fifth annual Gulf of Mexico Information Transfer Meeting. OCS Study MMS 85-0008. Metairie, La.: U.S. Dept. of the Interior. Minerals Management Service. pp. 329-335.

Wilson, C. A., V. Van Sickle, and D. Pope. 1987. The Louisiana artificial reef plan. Louisiana Dept. of Wildlife and Fisheries Technical Bulletin. No. 41. 130 pp.

Dr. Charles A. Wilson is an Associate Professor of Fisheries at the Coastal Fisheries Institute, Louisiana State University, Baton Rouge, Louisiana. Dr. Wilson's principal research interest involves age and growth of marine fishes. He is also an accomplished international mariculturist. Dr. Wilson serves as cochairman of the Louisiana Artificial Reef Initiative (LARI). The LARI was the driving force responsible for the coordination and planning leading to the realization of the Louisiana Artificial Reef Program. Dr. Wilson earned a Ph.D. in fisheries science from the University of South Carolina.

Ms. Virginia R. Van Sickle has been associated with Louisiana State University and State government focusing on research, development, management, and administration of the coastal marine environment of Louisiana since 1973. She has worked as a liaison with the Federal OCS program for several years, and as cochairman of LARI, played a lead role in drafting a legislative initiative that established a feasible framework for a major artificial reef program for Louisiana. Formerly, Ms. Van Sickle has served as Deputy Secretary of the Louisiana Department of Wildlife and Fisheries and as Assistant Director of the Louisiana Geological Survey. In early 1988, Governor Roemer appointed her as Secretary of the Louisiana Department of Wildlife and Fisheries.

BLANK PAGE

Utilization of Offshore Platforms by Recreational Fishermen and Scuba Divers off the Louisiana Coast

Mr. David R. Stanley
Dr. Charles A. Wilson
Coastal Fisheries Institute
Center for Wetland Resources
Louisiana State University
Baton Rouge, Louisiana

Abstract

Recreational fishing use patterns associated with offshore platforms off the Louisiana coast were investigated using a survey and a log book program. The survey was designed to determine how far avid recreational anglers and divers would travel to the oil and gas structures. The log book program was designed to record catch and effort data from fishermen utilizing oil and gas structures.

In 1986 and 1987 an oil and gas platform-use questionnaire was distributed to recreational angling and scuba diving groups. Information gathered from this study included boat length, horsepower, equipment present, number of trips per year, port of departure, areas utilized, and the species of fish sought and caught.

Anglers' boats were equipped with a higher percentage of echosounders and graph recorders while divers' boats were equipped with a higher percentage of LORAN (Long Range Navigation) units. Distance traveled offshore and party size for divers were greater than for recreational anglers. Boat length and horsepower were not different between the two groups. Anglers utilized more species of fish than divers. Boat length, horsepower, party size, distance traveled, and amount of electronic equipment generally increased from east to west across Louisiana for both anglers and divers.

In 1987 a log book program for offshore recreational anglers was initiated by the Coastal Fisheries Institute at Louisiana State University (LSU). This study ascertained use patterns and catch effort data from the log book participants for offshore oil and gas platforms. Catch per unit effort (number of fish caught/angler hour), or CPUE, for bottom fishing at or near oil and gas structures by recreational anglers was 2.32, and 0.94 while trolling near oil and gas platforms.

Introduction

Offshore fishing and recreational diving by Louisiana sportsmen are centered around the oil and gas platforms. It has been estimated that oil and gas platforms are the destination of approximately 37 percent of all saltwater recreational angling trips (Witzig, 1986) and over 70 percent of all recreational angling trips in the Exclusive Economic Zone (more than 3 miles from shore) in Louisiana (Reggio, 1987). Oil and gas platforms are a valuable resource for recreational divers in the state (Roberts and Thompson, 1983) since there are few suitable hard bottom areas or natural reefs off the Louisiana coast, the nearest natural reefs being located at least 75 miles offshore. A recent survey by LSU of the 1987 Grand Isle Tarpon Rodeo in Louisiana indicated at 100 percent of all fish entered in the spearfishing category were speared at or near oil and gas structures (Stanley, unpublished).

The importance of platforms as *de facto* artificial reefs in Louisiana cannot be overemphasized. Without these structures, offshore sport fishing opportunities in Louisiana would be greatly reduced (Dugas et al., 1979). Because of the importance of the existing oil and gas structures to offshore

fishing and recreational diving, and in consideration of the inevitable removal of these structures, the Louisiana Artificial Reef Initiative (LARI) was formed in 1984 to develop an artificial reef program using retired oil and gas structures (Wilson et al., 1987). The artificial reef program and subsequent plan were developed by LARI under the guidelines outlined in the Sport Fishing Institute's *Artificial Reef Planning Guide* (Ditton and Bonner Burke, 1985). An important consideration in the siting of artificial reefs is the determination of user group patterns (Parker et al., 1974; Myatt and Ditton, 1985; Gordon and Ditton, 1986). Ascertaining user group preferences concerning oil and gas structures will help to ensure proper site selection of future artificial reefs.

Other studies have profiled segments of offshore fishing in Louisiana. In a Minerals Management Service (MMS) study, personnel on oil and gas structures were utilized to maintain daily records on the number of boats, boat length, number of people per boat, user activity, type of fishing, suspected target species, and the number of oil and gas personnel who fished from the platform. Ditton and Auyong (1984) found that offshore fishing in Louisiana was not evenly distributed along the coast, but was dependent upon population densities, transportation links, and fishing infrastructure. The distance from shore to platforms utilized by offshore fishermen and divers increased from east to west in the MMS study area, and the distances to the platforms utilized by recreational divers were greater than those platforms used by anglers (Ditton and Auyong, 1984).

Reports on temporal use patterns of oil and gas structures were conflicting: a study by Witzig (1986) indicated that March and April were the most popular months for fishing oil and gas structures, while Ditton and Auyong (1984) found that recreational divers and anglers were most prevalent around the structures on weekends from May to August. Temporal use pattern results of recreational divers from Roberts and Thompson (1983) agreed with the Ditton and Auyong study.

Various studies indicate catch composition and target species of recreational fishermen include snapper (Lutjanidae), seatrout (*Cynoscion* sp.), Atlantic croaker (*Micropogonias undulatus*), king mackerel (*Scomberomorus cavella*), and cobia (*Rachycentron canadum*) (Dugas et al., 1979; Ditton and Auyong, 1984; Witzig, 1986). Recreational diver catch consisted mainly of red snapper (*Lutjanus campechanus*), grouper (Serranidae), and greater amberjack (*Seriola dumerili*) (Roberts and Thompson, 1983).

The purpose of this study was to profile the avid recreational anglers and divers that utilize the offshore oil and gas structures that function as artificial reefs; therefore, it is not a representation of all recreational anglers and divers off the Louisiana coast. The goals of this study were to determine the following:

1. the most popular areas containing oil and gas structures utilized by recreational anglers and divers and the the distances traveled to the structures;

2. the ports traditionally used by the recreational anglers and divers;

3. the species of fish sought by the user groups, the species of fish they normally catch, and their catch rates; and

4. the size of the boats, horsepower, and the amount of electronic equipment used by each group.

Methods

The data collection method for the study consisted of distributing the survey to coastal Louisiana recreational fishing and diving groups and to participants in coastal fishing tournaments. The survey was also published in a Louisiana sport fishing magazine. Offshore recreational anglers and divers were asked to complete the form and mail it to the authors.

Surveys were distributed from October 1986 to August 1987. Participating platform fishermen and divers were asked to list boat characteristics (i.e., length, horsepower, and electronic equipment), the average number of anglers or divers in their party, the five lease blocks (platform areas) most frequently fished, the five most frequently used ports, the average number of trips per year to oil and gas platforms, the species of fish sought, and the species of fish caught. They were also asked to rank seasons by the relative amount of activity conducted. The one-way distance from the respondents' most frequently used port to the lease blocks fished was calculated from a Louisiana Department of Natural Resources map (La. Dept. of Natural Resources, 1981). Straight line distances from the oil and gas structures to shore were obtained from MMS records.

Data from offshore fishermen were collected from March to June 1987 using log books. Information from the log books included number of anglers, structure fished (i.e., name of lease area, lease block number, and structure identification code), fishing method (i.e., bottom fishing or trolling), and the number and species of fish caught. All log book participants completed a survey. The angler log book design was based on the Lake Erie Angler Diary Program (Sztramko, 1986) and log book criteria outlined by Demory and Golden (1983).

Analysis of variance using software from SAS Institute, Inc., was used to determine differences in boat length, engine horsepower, the distance from the ports to the lease blocks fished, and the straight line distance from shore to the oil and gas structures between the user groups and between the different regions.

Results

The study area was divided into three regions according to criteria outlined by Ditton and Auyong (1984). The regions were the Delta Region, extending from South Pelto and South Timbalier Lease Areas east to the Main Pass Lease Area; the Bay Region, extending from the Ship Shoal Lease Area west to the Vermilion Lease Area; and the Cameron Region, which encompasses the West and East Cameron lease areas (figure 1).

A total of 244 usable replies were received from the survey. Offshore angler and boat characteristics are summarized in table 1. Mean boat length, average number of trips per year, and percentage of boats having an echosounder increased from west to east across coastal Louisiana for offshore anglers. The mean number of anglers per trip and percentage of boats having graph recorders and Loran equipment increased from east to west across coastal Louisiana for offshore anglers. The season of greatest use was the summer (i.e., June to August) for all regions.

The survey results from recreational divers were homogeneous across the three regions of coastal Louisiana (table 2). The only differences noted were in mean number of trips per year, which increased from west to east, and the percentage of boats having Loran equipment and graph recorders, which increased from east to west.

Comparison of angler and diver characteristics revealed that mean boat length was larger for divers than anglers although the differences were not statistically significant ($F = 0.74$, $P > 0.391$). Mean boat horsepower was slightly greater for anglers than it was for divers, but again the difference was not significant ($F = 0.59$, $P > 0.449$).

The most popular species of fish (unranked) sought and caught by anglers were grouper, cobia, snapper, red drum, spotted seatrout, king mackerel, other seatrouts, and greater amberjack (table 3). Regional differences in species of fish sought and caught are apparent: king mackerel, snapper, dolphin, bluefish, and greater amberjack were more popular in the Cameron Region than in the other two regions; spotted seatrout and other seatrouts were most popular in the Bay Region, while Atlantic croaker and Spanish mackerel were most popular in the Delta Region.

Recreational divers most frequently sought and caught (unranked) grouper, cobia, snapper, greater amberjack, and red drum (table 4). Strong regional differences were detected, with grouper and greater amberjack being most popular in the Delta Region. Red drum and other seatrouts were most popular in the Bay Region, and dolphin was most popular in the Cameron Region. Comparison of the target species of fish between anglers and divers reveals that divers were much more selective in the species they harvested. Generally, the capture percentage of a particular species was less than the seeking percentage from each user group, indicating the user groups were not always successful in harvesting their desired target species. Exception to this were less desirable species (e.g., black drum, Atlantic croaker, bluefish, shark, and Spanish mackerel) (tables 3 and 4).

The same ports were used by both offshore anglers and recreational divers. There were 12 ports used by the majority of the survey respondents (table 5). Ports in the Delta Region were used by the highest percentage of both anglers and divers, with ports in the Cameron and Bay Regions declining in percentages, respectively.

Lease areas in the Delta Region were the destinations for a majority of the recreational anglers and divers surveyed, with those in the Bay Region second and those in the Cameron Region third (table 6). The most popular lease areas for divers were Main Pass, West Delta, South Timbalier, and Ship Shoal. The most popular lease areas for offshore anglers were West Delta, South Timbalier, Vermilion, and West Cameron. The one-way distances traveled by recreational anglers and divers from port to their favorite lease blocks increased from east to west (table 7); however, the distances traveled by anglers between the three regions were not significantly different ($F = 0.66$, $P > 0.5184$). The one-way distances traveled by divers from port to their favorite lease blocks were significantly different from region to region ($F = 7.56$, $P > 0.0009$). The mean straight line distance from shore to oil and gas structures (table 8) increased significantly from east to west for divers ($F = 7.16$, $P > 0.0012$); however, the distances were not significantly different between regions for recreational anglers ($F = 0.24$, $P > 0.7887$).

A comparison of the one-way distances traveled from port to lease blocks between recreational anglers and divers over the three regions revealed that divers traveled significantly farther than did the anglers ($F = 5.01$, $P > 0.0002$). The straight line distance to the oil and gas platforms utilized by divers was significantly greater than the straight line distance traveled by offshore

anglers for the three regions ($F = 11.21, P > 0.0009$).

Thirty-eight log books were returned by offshore anglers for the reporting period of March to June 1987. The average CPUE (number of fish caught/angler per hour) for bottom fishing at oil and gas platforms was 2.32, and 0.94 for trolling near oil and gas platforms. The species of fish most often caught by the log book participants around oil and gas structures were greater amberjack, cobia, bluefish, Atlantic croaker, dolphin, grouper, king mackerel, red snapper, red drum, sharks, spotted seatrout, triggerfish (Balistidae), and other seatrouts.

Discussion

The results of the survey indicate that average boat length, average total horsepower, season of greatest activity, ports utilized, and the amount of electronic equipment were homogeneous between offshore anglers and recreational divers and across the three study regions. Differences across the three regions and between the two groups were detected in the average number of trips per year, average party size per trip, species of fish utilized, the one-way travel distance from port to the most frequently used lease blocks, and the straight line distance to the structures from shore.

The width of the Continental Shelf increases from east to west in Louisiana, forcing recreational anglers and divers to travel farther offshore in the west to water depths where desired fish species can be found. Greater distances were traveled by recreational divers than by anglers because underwater visibility tends to increase with distance offshore and the main target species of divers (snappers and groupers) are found in deeper waters.

The larger number of fish species utilized by anglers as compared to the number used by divers is a result of the gear used. Using rod and reel, anglers cannot be as selective about the fish they capture as can divers who use spearfishing gear. Furthermore, the habits of certain species may preclude their harvest by divers.

Regional differences in the popularity of certain species of fish with anglers and divers are the result of variations in regional abundance and the differing local tastes. With the exception of large triggerfish catches reported by the log book participants, comparison between the two showed that reported catch composition of fish from the survey and the log books did not differ. Since triggerfish are not highly sought after, survey respondents may have overlooked reporting catches of this species.

The increase in the average number of trips per year from west to east for both anglers and divers may be related to the average distance traveled per trip. Because anglers and divers in the Delta Region travel shorter distances offshore than do their counterparts in the west, they are able to make more trips per year.

Both ports and lease blocks in the Delta Region were used by the greatest number of anglers and divers. These results are not surprising since parishes surrounding the Delta Region have the highest population densities (Ditton and Auyong, 1984). The group of ports most heavily utilized as observed from our study agrees with the list of ports utilized by recreational anglers from Dugas et al. (1979).

A comparison between our results and those of similar studies reveals a number of differences. Results from our study show that mean boat length was larger than in those

studies by Ditton et al. (1980) and Ditton and Auyong (1984). Offshore anglers from our study also had more electronic equipment and larger average horsepower than did anglers from a study in the Galveston Bay area by Ditton et al. (1980). The results from our study indicate that the straight line distance from shore to the oil and gas platforms traveled by anglers and divers was much larger than those reported in the Ditton and Auyong (1984) study. Also, the total trip length for a typical offshore fishing trip from the Gordon (1986) study was 60.8 mi (97.8 km) while our results indicate the average platform fishing trip length was much longer than this.

The difference between this study and the others is in their scope. This survey was designed to profile avid recreational anglers and divers while the other two were cross-sections of the user groups. The values of average one-way distance traveled from the ports to the lease blocks obtained from this study will be considered by LARI as maximum travel distances for the respective user groups to future artificial reef development.

Since Witzig (1986) used catch per trip as his harvest index, meaningful comparisons with CPUE values from this study cannot be made. The CPUE was 7.55 from a study by Dugas et al. (1979) for recreational anglers bottom fishing at oil and gas structures. Our CPUE data from the log book program is limited in scope because of the short reporting period and small sample size, although we are continuing the log book program in order to gather more accurate results.

The results from this study indicate that the recreational anglers and divers utilizing oil and gas structures off the Louisiana coast have relatively large, fast boats with a substantial amount of electronic equipment. The average one-way distance traveled by the user groups was at least 38.5 mi (62 km) to the oil and gas structures, and this distance increased from east to west and from anglers to divers. The dominant species of fish sought by the user groups were grouper, snapper, cobia, greater amberjack, red drum, spotted seatrout, and king mackerel. A majority of the anglers and divers utilized ports and lease blocks in the Delta region. By profiling the avid recreational anglers and divers who utilize oil and gas structures, we can determine the design and location factors that would lead to an effective artificial reef program in Louisiana for those user groups.

Acknowledgements

We would like to thank the many recreational fishing and scuba diving groups and individuals who participated in the survey. We gratefully acknowledge the critical review of the manuscript by B. Gordon and an anonymous reviewer. Funding was provided by Louisiana Wallop Breaux Grant F54 and the Louisiana Artificial Reef Program, Louisiana State University Contribution No. LSU-CFI-88-08.

References Cited

Demory, R. L. and J. T. Golden. 1983. Sampling the commercial catch. In: L. A. Nielson and D. L. Johnson, eds., Fisheries techniques. Bethesda, Maryland: American Fisheries Society. pp. 421-430.

Ditton, R. B., A. R. Graefe, and A. J. Fedler. 1980. Predicting marine recreational fishing patterns from boat characteristics and equipment. Trans. Amer. Fish. Soc. 109:644-648.

Ditton, R. B. and J. Auyong. 1984. Fishing offshore platforms central Gulf of Mexico: an analysis of recreational and commercial fishing use at 164 major offshore petroleum structures. OCS Monograph MMS 84-0006. Metairie, La.: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 158 pp.

Ditton, R. B. and L. Bonner Burke. 1985. Artificial reef development for recreational fishing: a planning guide. Washington: Sport Fishing Institute. 68 pp.

Dugas, R., V. Guillory, and M. Fischer. 1979. Oil rigs and offshore sport fishing in Louisiana. Fisheries 4(6):2-10.

Gordon, W. R., Jr. and R. B. Ditton. 1986. A user-resource planning framework for offshore recreational artificial reefs. Coastal Zone Mgmt. J. 13:369-395.

Louisiana Department of Natural Resources. 1981. Offshore Louisiana oil and gas map.

Myatt, D. O. and R. B. Ditton. 1985. Exclusion mapping for artificial reef site selection to maximize recreational fishing benefits in the northern Gulf of Mexico. Washington: Sport Fishing Institute. 157 pp.

Parker, R. O., R. B. Stone, C. C. Buchanan, and F. W. Steimle, Jr. 1974. How to build artificial reefs. Fishery Facts 10. National Marine Fisheries Service. 47 pp.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 17 pp.

Roberts, K. J. and M. E. Thompson. 1983. Petroleum production structures: Economic resources of the Louisiana sport divers. Baton Rouge, La.: Louisiana Sea Grant College Program, Center for Wetland Resources, Louisiana State University. 39 pp.

SAS Institute Inc. 1985. SAS user's guide: Statistics, version 5 edition. Cary, N.C.: SAS Institute. 956 pp.

Sztramko, L. 1986. Lake Erie angler diary programme. 1985. Lake Erie Fisheries Assessment Unit Report 1986-4. Wheatley, Ontario: Ontario Ministry of Natural Resources. 45 pp.

Wilson, C. A., V. Van Sickle, and D. Pope. 1987. The Louisiana artificial reef plan. Baton Rouge, La.: Louisiana Sea Grant College Program, Center for Wetland Resources, Louisiana State University. 130 pp.

Witzig, J. 1986. Fishing in the Gulf of Mexico. 1984 marine recreational fishing results. In: Proceedings, sixth annual Gulf of Mexico Information Transfer Meeting. OCS Study MMS 86-0073. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. pp. 103-105.

Mr. David R. Stanley was born and reared in Canada and obtained a B.S. degree from the University of Guelph in Ontario, Canada, where he specialized in fisheries science. He worked as a fisheries technician during 1985-1986 conducting angler creel surveys and aquatic habitat analyses. Currently, he is attending Louisiana State University in pursuit of an M.S. degree in marine science. His research is centered on determining why some oil and gas structures produce more fish than others.

Dr. Charles A. Wilson is an Associate Professor of Fisheries at the Coastal Fisheries Institute, Louisiana State University, Baton Rouge, Louisiana. Dr. Wilson's principal research interest involves age and growth of marine fishes. He is also an accomplished international mariculturist. Dr. Wilson serves as cochairman of the Louisiana Artificial Reef Initiative (LARI). The LARI was the driving force responsible for the coordination and planning leading to the realization of the Louisiana Artificial Reef Program. Dr. Wilson earned a Ph.D. in fisheries science from the University of South Carolina.

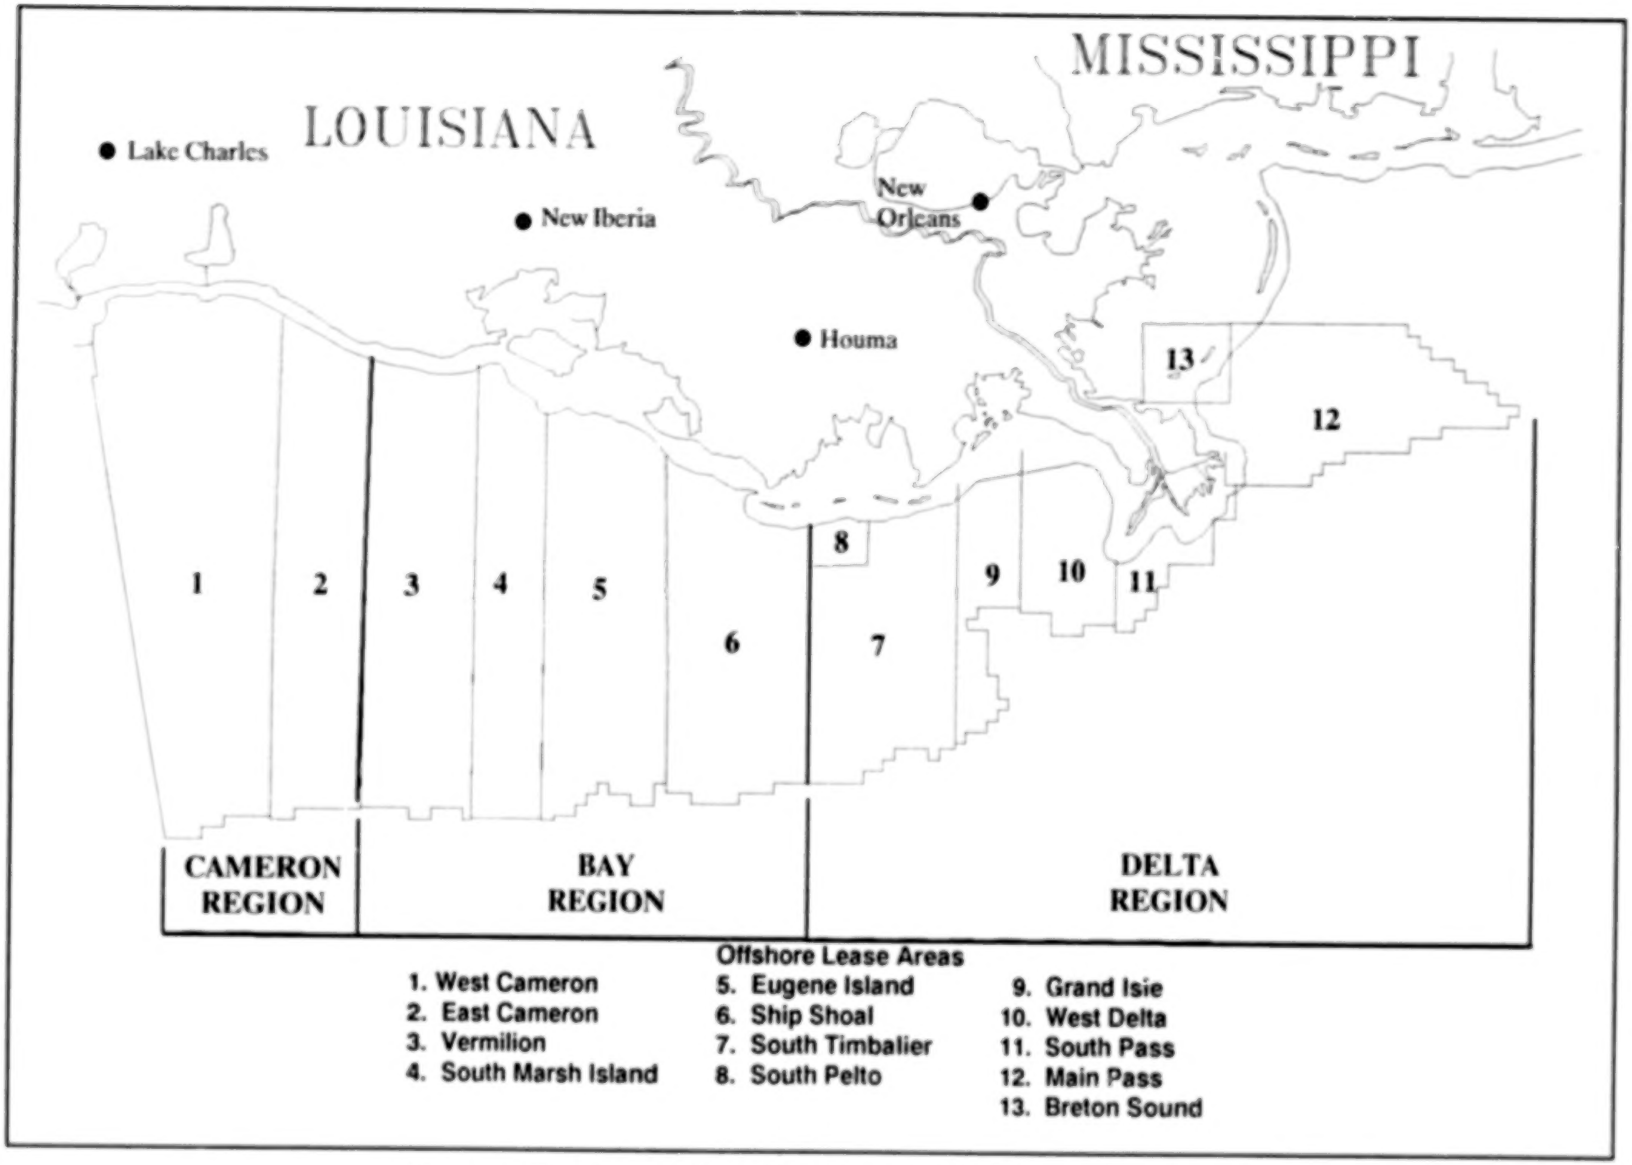

Figure 1. The three regions of the Louisiana offshore study area.

18

Table 1

Summary of the Survey Results on Boat and User Characteristics of Louisiana Offshore Recreational Anglers

	Region			
	Cameron	**Bay**	**Delta**	**All**
N	29	29	97	155
Mean boat length (m) (± SD)	7.28 ±1.39	7.62 ± 1.67	7.82 ± 2.34	7.71 ± 2.07
Mean engine horsepower (± SD)	294.83 ± 142.38	317.60 ± 136.59	288.89 ± 182.60	293.80 ± 167.43
Mean number anglers/trip	5.6	4.3	4.2	4.5
Mean number trips/year	17.0	17.6	19.0	18.3
Electronic equipment (%):				
Compass	100.0	100.0	95.9	97.4
Echosounder	32.1	38.5	50.0	44.7
Graph recorder	82.1	50.0	46.4	53.3
Loran	67.9	61.5	53.6	57.2
Season of highest use	Summer	Summer	Summer	Summer

Table 2

Summary of the Survey Results on Boat and User Characteristics of Louisiana Offshore Recreational Divers

	Region			
	Cameron	**Bay**	**Delta**	**All**
N	25	10	54	89
Mean boat length (m) (± SD)	8.10 ± 1.63	7.74 ± 1.97	8.17 2.80	8.09 2.37
Mean engine horsepower (± SD)	291.27± 165.87	308.50 ± 143.95	265.56 ± 164.87	280.19 ± 60.88
Mean number anglers/trip	7.2	4.6	5.7	6.0
Mean number trips/year	16.4	22.0	29.4	24.5
Electronic equipment (%):				
Compass	100.0	100.0	98.1	98.9
Echosounder	25.0	60.0	45.3	41.4
Graph recorder	58.3	40.0	66.0	46.0
Loran	62.5	70.0	68.0	65.5
Season of highest use	Summer	Summer	Summer	Summer

Table 3

Species of Fish Sought after and Caught from the Survey Results by Louisiana Offshore Recreational Anglers

Species	Region							
	Bay		Cameron		Delta		All	
	S (%)*	C (%)**	S (%)	C (%)	S (%)	C (%)	S (%)	C (%)
Grouper (*Serranidae*)	24.1	20.7	21.1	21.1	31.9	26.6	28.6	24.5
Cobia (*Rachycentron canadum*)	44.8	41.4	42.1	26.3	44.0	36.2	43.6	35.7
Snapper (Lutjanidae)	69.0	72.4	84.2	84.2	56.0	46.8	62.1	56.6
Red drum (*Sciaenops ocellatus*	44.8	48.3	26.3	26.3	42.9	41.5	41.4	41.3
Spotted seatrout (*Cynoscion nebulosus*)	34.5	41.4	10.5	15.8	17.6	18.1	20.7	23.1
King mackerel (*Scomberomorus cavalla*)	37.9	27.6	57.9	47.4	24.2	23.4	31.4	27.3
Black drum (*Pogonias cromis*)	-	-	-	5.3	1.1	4.3		3.5
Other seatrouts (*Cynoscion* sp.)	24.1	27.6	-	5.3	25.3	25.5	21.4	23.1
Atlantic croaker (*Micropogonias undulatus*)	-	-	5.3	10.5	9.9	10.5	7.1	8.4
Dolphin (*Coryphaena hippurus*)	3.4	3.4	15.8	26.3	7.7	8.5	7.9	9.8
Bluefish (*Pomatomus saltatrix*)	3.4	6.9	5.3	15.8	2.2	5.3	2.9	7.0
Shark (*Elasmobranchii*)	-	3.4	5.3	5.3	2.2	11.7	2.1	9.1
Spanish mackerel (*S. maculatus*)	3.4	10.3	10.5	21.1	11.0	10.6	9.3	11.9
Greater Amberjack (*Seriola dumerili*)	10.3	13.8	31.6	31.6	23.1	20.2	21.4	20.3

* S (%) — percent of respondents seeking the species.
** C (%) — percent of the respondents catching the species.

Table 4

Species of Fish Sought after and Caught from the Survey Results by Louisiana Offshore Recreational Divers

Species	Region							
	Bay		Cameron		Delta		All	
	S (%)*	C (%)**	S (%)	C (%)	S (%)	C (%)	S (%)	C (%)
Grouper (Serranidae)	40.0	30.0	33.3	33.3	87.5	70.8	71.4	58.6
Cobia (*Rachycentron canadum*)	60.0	60.0	66.7	58.3	68.8	58.3	67.1	58.6
Snapper (Lutjanidae)	90.0	100.0	91.7	100.0	91.7	77.1	91.4	84.3
Greater Amberjack (*Seriola dumerili*)	20.0	30.0	25.0	33.3	60.4	56.3	48.6	48.6
Red drum (*Sciaenops ocellatus*	30.0	40.0	8.3	8.3	18.8	20.8	18.6	21.4
King mackerel (*Scomberomorus cavalla*)	50.0	30.0	41.7	33.3	8.3	6.3	20.0	12.9
Spotted seatrout (*Cynoscion nebulosus*)	20.0	20.0	16.7	16.7	8.3	10.4	11.4	12.9
Other seatrouts (*Cynoscion* sp.)	50.0	50.0	0.0	0.0	2.1	2.1	8.6	6.6
Dolphin (*Coryphaena hippurus*)	0.0	0.0	25.0	25.0	2.1	2.1	5.7	5.7
Shark (*Elasmobranchii*)	0.0	0.0	0.0	16.7	8.3	4.2	7.1	5.7

* S (%) — percent of respondents seeking the species.
** C (%) — percent of the respondents catching the species.

Table 5

Ports Utilized by Recreational Fishermen and Divers in Louisiana

Region	Port	Respondents Using the Port	
		Diver (%)	Angler (%)
Delta	Grand Isle	17.4	14.5
	Venice	13.0	10.7
	Port Fourchon	13.0	5.5
	Cocodrie	9.4	4.8
	Empire	5.4	6.9
	Port Eads	< 1.0	4.2
	Hopedale	< 1.0	3.5
Bay	Freshwater Bayou	4.0	9.3
	Mermentau River	3.6	2.4
	Cypremort Port Point	3.3	4.8
Cameron	Cameron	7.1	6.9
	Grand Chenier	5.8	5.9
Other		16.0	20.6
		100.0	100.0

Table 6

Lease Blocks Utilized by Recreational Anglers and Divers in Louisiana

Region	Port	Respondents Using the Lease Block	
		Diver (%)	Angler (%)
Delta	West Delta	19.4	23.1
	South Timbalier	18.1	12.1
	Main Pass	12.3	2.4
	Grand Isle	5.3	4.3
	South Pass	2.2	4.6
	South Pelto	0.4	1.9
	Breton Sound	-	0.2
Bay	Ship Shoal	18.5	9.2
	Vermilion	9.3	12.8
	Eugene Island	4.9	7.5
	South Marsh Island	4.0	3.4
Cameron	West Cameron	3.3	9.9
	East Cameron	2.6	10.1
		100.3	101.5

Table 7

Mean One-way Distances (± SD) Traveled to Lease Blocks from the Respondent's Port of Departure

Region	Divers (km)	Anglers (km)
Delta	73.43 ± 25.93	62.70 ± 30.84
Bay	83.74 ± 48.81	78.71 ± 40.93
Cameron	141.68 ± 127.53	83.03 ± 41.43

Table 8

Mean Straight-line Distances (± 1 SD) of Oil and Gas Structures to Shore

Region	Divers (km)	Anglers (km)
Delta	42.79 ± 35.63	53.56 ± 37.40
Bay	55.35 ± 33.83	46.93 ± 27.18
Cameron	122.54 ± 74.61	65.54 ± 45.28

Geological and Geotechnical Aspects of Artificial Reef Site Selection, Offshore Louisiana

David L. Pope
Louisiana Geological Survey
Louisiana State University
Baton Rouge, Louisiana
and
Thomas F. Moslow
Department of Geology
University of Alberta
Edmonton, Alberta, Canada

Abstract

This paper describes the techniques and methodology used to select sites for obsolete oil and gas platforms converted into artificial fishing reefs, and provides an overview of geological and technological constraints to artificial reef emplacement on the Louisiana outer continental shelf (OCS). High-resolution geophysical data, geotechnical (foundation) borings, cores and grab samples, and cartographic data are used to identify and assess the constraints within proposed reef sites. Maps that outline the location or distribution of constraints or other activities to reef emplacement are used to assist in selecting specific reef sites.

Introduction

Obsolete oil and gas platforms are used as artificial fishing reefs in Louisiana because of their abundance, structural design and durability, and proven ability to attract large numbers and diverse species of fish. This paper describes the techniques and methodology used to select sites for obsolete oil and gas platforms as fishing reefs, and provides an overview of geological and technological constraints to placement of the structures on the Louisiana OCS.

In most cases, the Louisiana OCS poses no unusual engineering problems for siting of offshore production platforms (Ploessel and Campbell, 1980). This is also true for siting abandoned platforms as fishing reefs under most circumstances. Most of the Louisiana OCS is characterized by undeformed, flat-lying, or gently dipping strata with seafloor slopes typically less than one percent and low sedimentation rates, except near the Mississippi delta (Ploessel and Campbell, 1980).

However, the Louisiana continental shelf and slope are characterized by numerous near-surface geologic features that pose constraints to reef siting activities. By industry standards, these features are generally considered constraints (rather than hazards) because, although they present difficulties for environmentally sound, engineered construction, their effects can be mitigated by proper design and construction (Kraft et al., 1979). When selecting an artificial reef site, their effects are mitigated simply by choosing another location on the seafloor where significant constraints are absent.

Geologic constraints to reef siting include active faults, gas seeps and gas-charged sediments, very soft muds, salt or mud intrusions, areas susceptible to mass wasting (slumps, slides, debris flows), and hurricane-force winds and large waves (Bea and Audibert, 1980; Coleman et al., 1980; Prior and Coleman, 1982, 1983, 1984; Bouma et al., 1976; Martin, 1980; Continental Shelf Associates, 1986). Most of these features are the result of the rapid deposition of organic rich, fine-grained, water-saturated sediments, and salt diapirism. These processes are in part responsible for the irregular bathymetry and unstable seafloor common to the Mississippi delta region and the outer continental shelf and slope in the northern Gulf of Mexico (figure 1).

Technological (man-made) constraints to site selection are also present as a result of oil and gas exploration and development, commercial fishing and shrimp trawling, and maritime shipping. Because of the prodigious hydrocarbon reserves beneath the Louisiana OCS, over the last 50 years the oil and gas industry has constructed in this area the largest offshore production infrastructure in the world. An estimated 3,600 oil and gas platforms and over 15,000 miles of interconnecting pipelines and cables have been installed on the Louisiana OCS (figures 2 and 3). Pipelines, communication cables, subsea production equipment, trawling areas, navigational fairways, sunken vessels, and certain areas with active mineral leases are considered technological constraints because the State of Louisiana (as permittee) could be liable for damage to production and fishing equipment and for pollution of the marine environment if caused by improper artificial reef emplacement. Both geological and technological constraints must therefore be identified and avoided (if present) before artificial reefs are put in a certain location.

Methods of Constraint Assessment

Geological and technological constraints are identified and assessed from available high-resolution geophysical data (3.5- to 7.0-kHz subbottom profiles, single-channel seismic, and 105-kHz side-scan sonar), geotechnical (foundation) borings, cores and grab samples, and cartographic data (pipeline maps, lease block maps, published bathymetric maps and nautical charts). Most of this data has been obtained by Federal and State agencies, universities, research institutions, and private industry. While much of this information is considered proprietary, a considerable amount is within the public domain.

High-resolution geophysical profiles are collected on both local and regional survey grids (King, 1980), where a number of acoustical instruments using different source frequencies with unique resolution and penetration capabilities (Sieck and Self, 1977; Sylwester, 1982; Prior and Coleman, 1984) are employed from a precisely positioned survey vessel (Trabant, 1984). These acoustic systems use sound-generating devices (such as pingers, boomers, air guns, sparkers), sound receivers, and graphic recorders to define the water depth and provide a cross-sectional display of the sea bottom and subsurface lithology (Sieck and Self, 1977), indicated by variations in acoustic reflection characteristics (Prior and Coleman, 1984).

The seafloor and subbottom data obtained from high-resolution geophysical methods can be correlated and calibrated to foundation borings, cores, and bottom surface samples (Prior and Coleman, 1984). The physical geological and engineering properties of the sediments obtained through these techniques, such as lithology, shear strength, and water content are used to calculate the sediments' bearing capacity and the amount of compaction expected as a result of platform emplacement. These calculations are based on the surface area of the platform, sediment shear strength, and the horizontal and vertical loads (Trabant, 1984). This kind of information is important when selecting reef sites because the amount of clearance over the structure must be known for both navigational and permitting purposes, particularly for reefs sited in water depths less than 100 ft (30 m).

Cartographic data are used to determine the general location or proximity of technological features within proposed reef sites, and for general planning purposes. They are also used as drawings to obtain permits that meet certain navigational and buoying specifica-

tions set by the U.S. Army Corps of Engineers and the U.S. Coast Guard.

Artificial Reef Site Selection Process

The general procedure used to select sites for artificial reefs on the Louisiana OCS includes: (1) exclusion mapping; (2) establishment of artificial reef planning areas; (3) database compilation; (4) assessment and interpretation of database; (5) mapping of geological and technological features within each proposed reef site; and (6) site selection.

The first two steps of this procedure generally eliminate the most obvious constraints that could cause an artificial reef permit to be denied or its approval delayed. The next four steps are aimed at assessing and identifying constraints within site-specific locations within an artificial reef planning area. These methods and their results are described in more detail below.

Exclusion Mapping

The artificial reef site selection process begins with the elimination or exclusion of certain areas, such as navigational fairways, restricted military zones, pipeline corridors, natural reefs, traditional commercial fishing and shrimp trawling areas, and areas with present or projected mineral production or leasing activity. Other areas unsuitable for placement of these structures include the region immediately seaward of the Mississippi delta, the continental shelf margin and slope, and the inner shelf with water depths less than 100 ft (30 m). These areas are excluded due to local hydrological and active geological processes (Christian, 1984; D'Itri, 1985; Myatt, 1985; Swingle, 1985; Wilson et al., 1987), and for permitting reasons as well.

Shallower waters are excluded as reef sites for oil and gas platforms primarily because of navigational concerns, and possible damage that could result from large storm- and hurricane-generated waves and currents. Louisiana has one of the highest frequencies of hurricane landfall in North America (one in approximately every three years); such storms are known to generate current velocities in excess of 3.28 ft/sec (100 cm/sec) in water depths of 100 ft (30 m) (Snedden, 1985). Coleman and Prior (1982) have also reported recordings of 10- and 11-second period waves with heights in excess of 65 ft (20 m) seaward of the Mississippi delta in water depths of 656 ft (200 m). Such large waves and strong currents may have significant impacts on structures sited as artificial reefs, particularly in shallower water. For example, Continental Shelf Associates (1986) reported that a Liberty Ship sited as an artificial reef in 65 ft (20 m) of water offshore Mississippi was broken into two pieces and moved about 200 ft (61 m) by hurricane-generated waves and currents. However, they also reported that other ships in the same site and at another nearby location were not severely affected by the hurricane. At any rate, large storm- and hurricane-generated waves can pose serious constraints to placement of reefs because of the high density of oil and gas and other industry activity on the Louisiana OCS. Materials other than oil and gas platforms would therefore probably be used as artificial reefs in shallower water sites.

Although it is difficult to precisely quantify the constraints with associated impacts to other OCS activities, a number of possibilities exist that could present problems if they are not taken into consideration. Table 1 compares common geological and technological constraints with environmental, engineering and other risks or impacts associated with improper selection of artificial

reef sites. These comparisons will be discussed further below.

Selection of Artificial Reef Planning Areas

The general area within which artificial reefs may be located is designated a planning area (Wilson et al., 1987). Planning areas are selected on the basis of exclusion mapping, user preferences, public hearings, and consultation with representatives of the shrimp and fishing industries (Myatt and Ditton, 1986; Wilson et al., 1987). Figure 4 outlines the general location of eight artificial reef planning areas established to date on the Louisiana OCS, which range in size from 70 to 165 square miles (113 to 266 square km) each. Specific locations are then targeted for study within each planning area so that a suitable site can be chosen.

Database Compilation

Because of the intensive development of oil and gas resources on the Louisiana OCS, a considerable amount of data has been collected in this region. An extensive base of nonproprietary and proprietary data valuable to the site selection process is therefore generally available through Federal agencies and/or private industry. Federal agencies that archive and disseminate useful nonproprietary data include the Minerals Management Service (MMS), the National Geophysical Data Center (NGDC), the U.S. Geological Survey (USGS), and the National Ocean Service (NOS). Searches for data are usually conducted within specified geographic coordinates or in some cases, by offshore lease block.

In general, both proprietary and nonproprietary data have been obtained and analyzed by marine scientists to provide: (1) an assessment of strategic minerals and other resources on the Louisiana OCS; (2) an assessment of geological and engineering constraints or hazards to platform and pipeline installation; (3) identification of areas on the Louisiana OCS of potential archaeological significance; and (4) geological and oceanographic data for research purposes (Wilson et al., 1987). Of course, this data is also very useful for selecting artificial reef sites.

The most useful data available through these agencies include high-resolution geophysical data accompanied with survey trackline maps and technical reports; foundation borings and logs of cores and grab samples; bathymetric maps; offshore oil and gas, lease block, and pipeline and platform location maps; as well as numerous technical and open-file reports and leasing information. Additional nonproprietary data is available as published research papers, technical reports, and textbooks.

Once the data available within an artificial reef planning area has been located, it is then acquired, interpreted, and assimilated into a series of maps that is used to select or exclude specific artificial reef sites within each planning area.

Database Assessment and Interpretation

The geophysical and geotechnical tools and techniques traditionally used by industry for marine exploration and engineering activities are also applied to the selection of artificial reef sites. Although it is not generally possible to directly infer the sediment type from seismic profiles, qualitative lithologic, depositional, and structural interpretations can be made based on the characteristics of the seismic reflections (Sieck and Self, 1977). Correlation of the seismic data with cores and foundation borings is therefore necessary to obtain a more accurate interpretation between the

seismic reflections and the lithological and physical properties of the sediments (Sieck and Self, 1977; Trabant, 1984).

Seismic reflections are interpreted based on parameters such as amplitude, continuity, and external and internal geometries (Mitchum et al., 1987). Figure 5 is a 3.5-kHz subbottom profile acquired in 1982 by the USGS from Eugene Island Block 393. The seismic reflections in this profile are characterized by several types, including parallel continuous reflectors (p), indicative of fine-grained pelagic and hemipelagic sedimentation; transparent reflectors (t), indicative of very soft and homogenous sediments; acoustic wipe-out zones, indicative of gas seeps and gas-charged sediments; and acoustically semitransparent to chaotic reflectors, generally indicative of debris flows and small slumps (Bouma et al., 1987). Other interesting features on this profile include mud mounds, which are constructed by gas escaping from the subsurface that liquefies the sediments, creating these topographic expressions. It should be obvious from this profile that this area would not be a very good place to site an artificial reef.

Figure 6 is a 7.0-kHz subbottom profile acquired in 1974 by the USGS from South Timbalier Block 154. A massive shelf-edge failure, associated with rotational or retrogressive slumping, is commonly characterized by truncation of reflectors and rumpled to chaotic reflectors (Bouma et al., 1987); these types of reflectors are clearly evident in this profile. Although this feature may not pose a serious constraint to the stability of an artificial reef during the projected life span of the structure, it could also be argued that these sediments have been unstable in the recent past, and may be susceptible to such mass movement as soil creep or rotational slumping. These movements could be attributed to delta switching, earthquakes, localized slope oversteepening, or hurricane-induced surface water waves that apply hydraulic forces on the seafloor. Where the instability has been active (or recent), slope failure thresholds are generally the result of a complex interaction of processes, rather than any single factor (Prior and Coleman, 1984; Watkins and Kraft, 1978). This question is easily resolved, however, by simply placing the reef in another location away from these kinds of features.

Figure 7 is an ORE Geopulse* profile acquired jointly during 1987 by the Louisiana Geological Survey (LGS) and the USGS in Main Pass Block 305. This profile, filtered at 300-Hz to 3.0-kHz frequency, shows a salt diapir that has penetrated the seafloor. Also note the bioherms, or natural reefs, that have grown on the crest of the diapir. Many of these types of reefs have grown over the surface expressions of salt diapirs or ridges that have penetrated the seafloor, generally occurring in the northern Gulf of Mexico along a trend seaward of the 328-ft (100 m) isobath (Ploessel and Campbell, 1980). These features are constraints to siting of reefs due to a variety of factors, including dissolution by seawater of large volumes of solid salt; intense and intricate faults and faulting patterns; gas seepage; and rough, irregular, or steep local seafloor topography that may induce seafloor erosion and mass movement (McGrail and Carnes, 1983; Rezak et al., 1985; Coleman and Prior, 1987). Also, because these features are natural reefs, it is not necessary to place an artificial reef in these locations.

Figure 8 is a 105-kHz side-scan sonograph acquired during 1982 by the USGS in Main Pass Block 146. Although nonproprietary side-scan sonograph records are relatively rare for those lease blocks within the planning areas, they are a very valuable source of

information. Figure 8 shows a pipeline and a sunken vessel on the seafloor. In conjunction with pipeline maps and nautical charts, the location of these types of features can readily be identified and avoided. Pipelines would conceivably be the most serious constraint to selecting an artificial reef site because of possible damage and pollution of the marine environment (table 1).

Mapping

Through the above assessment and interpretation methods, a series of geological maps and cross-sections can be prepared that illustrate seafloor morphology and subsurface structures, faults, gas seeps and gas-charged sediments, bathymetry, and location of pipelines, navigational fairways, and legal boundaries. An organized sequence of maps for each planning area assures that all geological and technological features will be accounted for (Sieck and Self, 1977; Trabant, 1984). Subbottom cross-sections can also provide additional insight into subsurface geological and geotechnical conditions.

Figure 9 is one example of the above types of maps that can be prepared that are very useful when selecting locations for artificial reefs. This map was prepared through interpretation of 3.5-kHz subbottom profiles acquired in West Cameron Block 616, and shows an active fault with surface relief of up to 26 ft (8 m) across the fault plane. The numerous swales or small depressions evident on the 3-dimensional perspective are generally associated with gas seepage. Working platforms and active pipelines in the northeastern part of the lease block presently constrain reef siting activities to the downthrown or southwestern side of the fault. Proprietary foundation borings available for this lease block reveal that the surface sediments comprise silty sands that were deposited by a relict distributary channel. This location therefore offers a relatively firm substrate for an artificial reef, provided it is not emplaced on the fault or scour depressions formed by the escaping gas.

Site Selection

Specific reef sites are selected within each planning area after the exclusion and geologic maps have been completed. In many cases, however, geological data are available only for certain lease blocks within a planning area because the data has not been collected by a Federal or State agency or is proprietary. Site selection within those particular lease blocks must then be based upon the other published sources of data described above because of the prohibitive expense of acquiring geophysical and geotechnical data.

However, when geophysical and geotechnical data are available for assessment and interpretation, geological and technological constraints can be evaluated, and intelligent decisions made as to where to locate artificial reefs on the seafloor. Once this decision has been reached, the final step would be to meet with Federal, industry, and commercial fishing and shrimping representatives to make sure the location would not interfere with their operations. This step avoids delays that could otherwise occur during the permitting process.

Summary

Obsolete oil and gas platforms make good artificial reef materials because of their structural design and ability to withstand harsh marine conditions, and also their proven ability to attract large numbers and diverse species of fish. The techniques and methodology discussed in this paper are used

to identify and assess constraints that could affect placement of these structures or other OCS activities within a specific location. A number of constraints and associated impacts, which must be addressed before an artificial fishing reef can be put in a certain location, have been identified on the Louisiana OCS (table 1).

Exclusion mapping eliminates most of the obvious constraints to site selection, such as navigational fairways, pipeline corridors, and concentrations of industry activity. Public hearings, user preference, and consultations with various industry and government representatives also help in choosing designated artificial reef planning areas. Once the general planning areas have been approved, a comprehensive database available for each area is acquired and interpreted to assess any constraints present within the area and to prepare maps for both planning and permitting purposes. High-resolution geophysical, geotechnical, and cartographic data are the most useful and available kinds of information used to assess the seafloor and subsurface conditions within a proposed reef site.

Acknowledgements

The authors extend their appreciation to the Louisiana Department of Wildlife and Fisheries, who provided financial support through Wallop-Breaux funds. We also extend a special thanks to Charles A. Wilson III and Virginia Van Sickle for their encouragement and support of this research.

We thank Dorothy Arcana, Robert Kuzela, J. Rogers Pearcy, James Parrish, Villere Reggio, and Susan Holshouser with the Minerals Management Service in New Orleans, Louisiana, for their assistance and cooperation in providing data to the Louisiana Artificial Reef Program. We appreciate the donation of certain proprietary data provided by numerous oil companies. John B. Wagner assisted interpretation of the seismic data, and Edward Koch, Keith Graham and Karen Westphal assisted with preparation of several key figures. Thanks also to Jacquelyn Monday for editing the manuscript and Tara Roussel for typing the manuscript.

References Cited

Bea, R. G. and J. M. E. Audibert. 1980. Offshore platforms and pipelines in the Mississippi River Delta. Journal of American Association of Civil Engineers, Geotechnical Engineering Division. (106). GT8: Pp. 853-869.

Bouma, A. H., G. T. Moore, and J. M. Coleman (eds.). 1976. Beyond the shelf break. New Orleans: American Association of Petroleum Geologists (AAPG) Marine Geology Short Course 2.

Bouma, A. H., C. E. Stelting, and M. H. Feeley. 1987. High-resolution reflection profiles. In: A. W. Bally, ed. Atlas of Seismic Stratigraphy: AAPG Studies in Geology No. 27, Vol. 1, Pp. 72-95.

Christian, R. T. 1984. Transportation costs of artificial reef materials. Sport Fishing Inst. Technical Report No. 4. September 1984. Washington: Sport Fishing Institute, Artificial Reef Development Center. 19 pp.

Coleman, J. M., D. B. Prior, and L. E. Garrison. 1980. Subaqueous sediment instabilities in the offshore Mississippi River Delta. In: Environmental information on hurricanes, deep water technology, and Mississippi Delta mudslides in the Gulf of Mexico. BLM Open-File Report 80-02. New Orleans: U.S. Dept. of the Interior, Bureau of Land Management. Pp. 1-49.

Coleman, J. M. and D. B. Prior. 1987. High-resolution geophysical study: Louisiana-Texas continental slope. Coastal Studies Institute, Louisiana State University, Baton Rouge, Louisiana. 112 pp. plus appendices.

Continental Shelf Associates. 1986. Operational factors affecting artificial reef siting off Mississippi. In: J. L. Jones, ed. A plan for siting artificial reefs in the northern Gulf of Mexico. Mississippi-

Alabama Sea Grant Consortium. Technical Report MASGP-86-021. U.S. Dept of Commerce, National Oceanic and Atmospheric Administration, National Marine Fisheries Service. Washington, D.C. 840 pp.

D'Itri, F. M. (ed.). 1985. Artificial reefs: marine and freshwater applications. Chelsea, Michigan: Lewis Publishers, Inc. 589 pp.

King, L. H. 1980. Aspects of regional surficial geology related to site requirements--eastern Canadian shelf. In: D. A. Ardus, ed. The Society for Underwater Technology Conference Proceedings. London: Graham and Trotman, Ltd. Pp. 37-60.

Kraft, L. M., K. J. Campbell, and M. R. Ploessel. 1979. Some geotechnical engineering problems for upper slope sites in the northern Gulf of Mexico. In: L. J. Doyle and O. H. Pilkey, Jr., eds. Geology of continental slopes. Society of Economic Paleontologists and Mineralogists (SEPM), Special Publication No. 27, Tulsa, Oklahoma. 374 pp.

Martin, R. G. and A. H. Bouma. 1978. Physiography of the Gulf of Mexico. In: A. H. Bouma, G. T. Moore, and J. M. Coleman, eds. Framework, facies, and oil-trapping characteristics of the upper continental margin. AAPG Studies in Geology No. 7. Tulsa, Oklahoma. 326 pp.

McGrail, D. W. and M. Carnes. 1983. Shelfedge dynamics and the nepheloid layer in the northwestern Gulf of Mexico. In: D. J. Stanley and G. T. Moore, eds. The shelfbreak: critical interface on continental margins. SEPM Special Publication No. 33. Tulsa, Oklahoma. 467 pp.

Mitchum, R. M., P. R. Vail, and S. Thompson, III. 1977. Part Two: The depositional sequence as a basic unit for stratigraphic analysis. In: C. E. Payton, ed. Seismic stratigraphy--applications to hydrocarbon exploration. AAPG Memoir 26. Tulsa, Oklahoma. 516 pp.

Myatt, D. O. 1985. Artificial reef site selection to maximize fishing benefits in the Gulf of Mexico. In: Proceedings, Fifth Annual Gulf of Mexico Information Transfer Meeting. November 1984. OCS Study/MMS 85-0008. New Orleans: U.S. Dept. of the Interior, Minerals Management Service. Pp. 314-321.

Myatt, D. O. and R. B. Ditton. 1986. Exclusion mapping for artificial reef site selection in the northern Gulf of Mexico. Washington: Sport Fishing Institute, Artificial Reef Development Center.

Ploessel, M. R. and K. J. Campbell. 1980. Northwestern Gulf of Mexico--engineering implications of regional geology. In: D. A. Ardus, ed. The Society for Underwater Technology Conference Proceedings. London: Graham and Trotman, Ltd. Pp. 61-76.

Prior, D. B. and J. M. Coleman. 1982. Active slides and flows in underconsolidated marine sediments on the slopes of the Mississippi Delta. In: S. Saxov and J. K. Nieuwenhuis, eds. Marine slides and other mass movements. Plenum Publishing Corporation. Pp. 21-49.

Prior, D. B. and J. M. Coleman. 1983. Lateral movement of sediments. Ocean Sciences and Engineering Bulletin 8(2):113-155.

Prior, D. B. and J. M. Coleman. 1984. Submarine slope instability. In: D. Brunsden and D. B. Prior, eds. Slope instability. John Wiley and Sons, Ltd. Pp. 419-455.

Rezak, R., T. J. Bright, and D. W. McGrail. 1985. Reefs and banks of the northern Gulf of Mexico: their geological, biological, and physical dynamics. Wiley-Interscience. New York: John Wiley and Sons. 259 pp.

Sieck, H. C. and G. W. Self. 1977. Analysis of high-resolution seismic data. In: C. E. Payton, ed. Seismic stratigraphy--applications to hydrocarbon exploration. AAPG Memoir 26. Tulsa, Oklahoma. 516 pp.

Snedden, J. W. 1985. Origin and sedimentary characteristics of discrete sand beds in modern sediments of the central Texas continental shelf. Unpublished Ph.D. dissertation. Baton Rouge: Louisiana State University. 247 pp.

Stanfield, C. P., E. L. McGehee, Jr., J. I. Snead, E. B. Millet, and E. L. Nichols. 1981. Offshore Louisiana oil and gas map. Baton Rouge: Louisiana Dept. of Natural Resources, Louisiana Geological Survey.

Swingle, H. 1985. Alabama's artificial reef program. In: Proceedings, Fifth Annual Gulf of Mexico Information Transfer Meeting. November 1984. OCS Study/MMS 85-0008. New Orleans: U.S. Dept. of

the Interior, Minerals Management Service. Pp. 324-326.

Sylwester, R. E. 1982. Single-channel, high-resolution, seismic-reflection profiling: a review of the fundamentals and instrumentation. In: R. Geyer, ed. Hardbook of geophysical exploration at sea. Boca Raton: CRC Press, Inc.

Trabant, P. K. 1984. Applied high resolution geophysical methods: offshore geoengineering hazards. Boston: International Human Resources Development Corporation.

Watkins, D. J. and L. M. Kraft, Jr. 1978. Stability of continental shelf and slope off Louisiana and Texas: geotechnical aspects. In: A. H. Bouma, G. T. Moore, and J. M. Coleman, eds. Framework, facies, and oil-trapping characteristics of the upper continental margin. AAPG Studies in Geology No. 7. Tulsa, Oklahoma. Pp. 267-286.

Wilson, C. A., V. R. Van Sickle, and D. L. Pope. 1987. The Louisiana Artificial Reef Plan. Technical Bulletin No. 41. Baton Rouge: Louisiana Dept. of Wildlife and Fisheries. 130 pp.

David L. Pope is a native of Little Rock, Arkansas, and received a B.S. degree in geology from the University of Arkansas in 1982. From 1982-1984, he was employed as a geologist by private industry in the Gulf Coast, Illinois, and Appalachian Basins. Since 1985, he has been employed by the Louisiana Geological Survey as a research associate, through which he has been an active participant in the Louisiana Artificial Reef Program. Mr. Pope is also a candidate for an M.S. degree in geology from LSU.

Thomas F. Moslow is a native of Buffalo, New York, and received a Ph.D. in geology from the University of South Carolina in 1980. From 1980-1983 Dr. Moslow worked with both the Sedimentology and Production Research Groups of Cities Service Oil Co. in Tulsa, Oklahoma. From 1983-1987, he held a joint appointment as Supervisor of the Louisiana Geological Survey Coastal Geology Program and Assistant Professor in the Dept. of Geology and Geophysics at LSU. Dr. Moslow is currently an Associate Professor of Geology at the University of Alberta, Canada, and has authored numerous articles and scientific reports on various aspects of coastal and continental shelf sedimentation.

BLANK PAGE

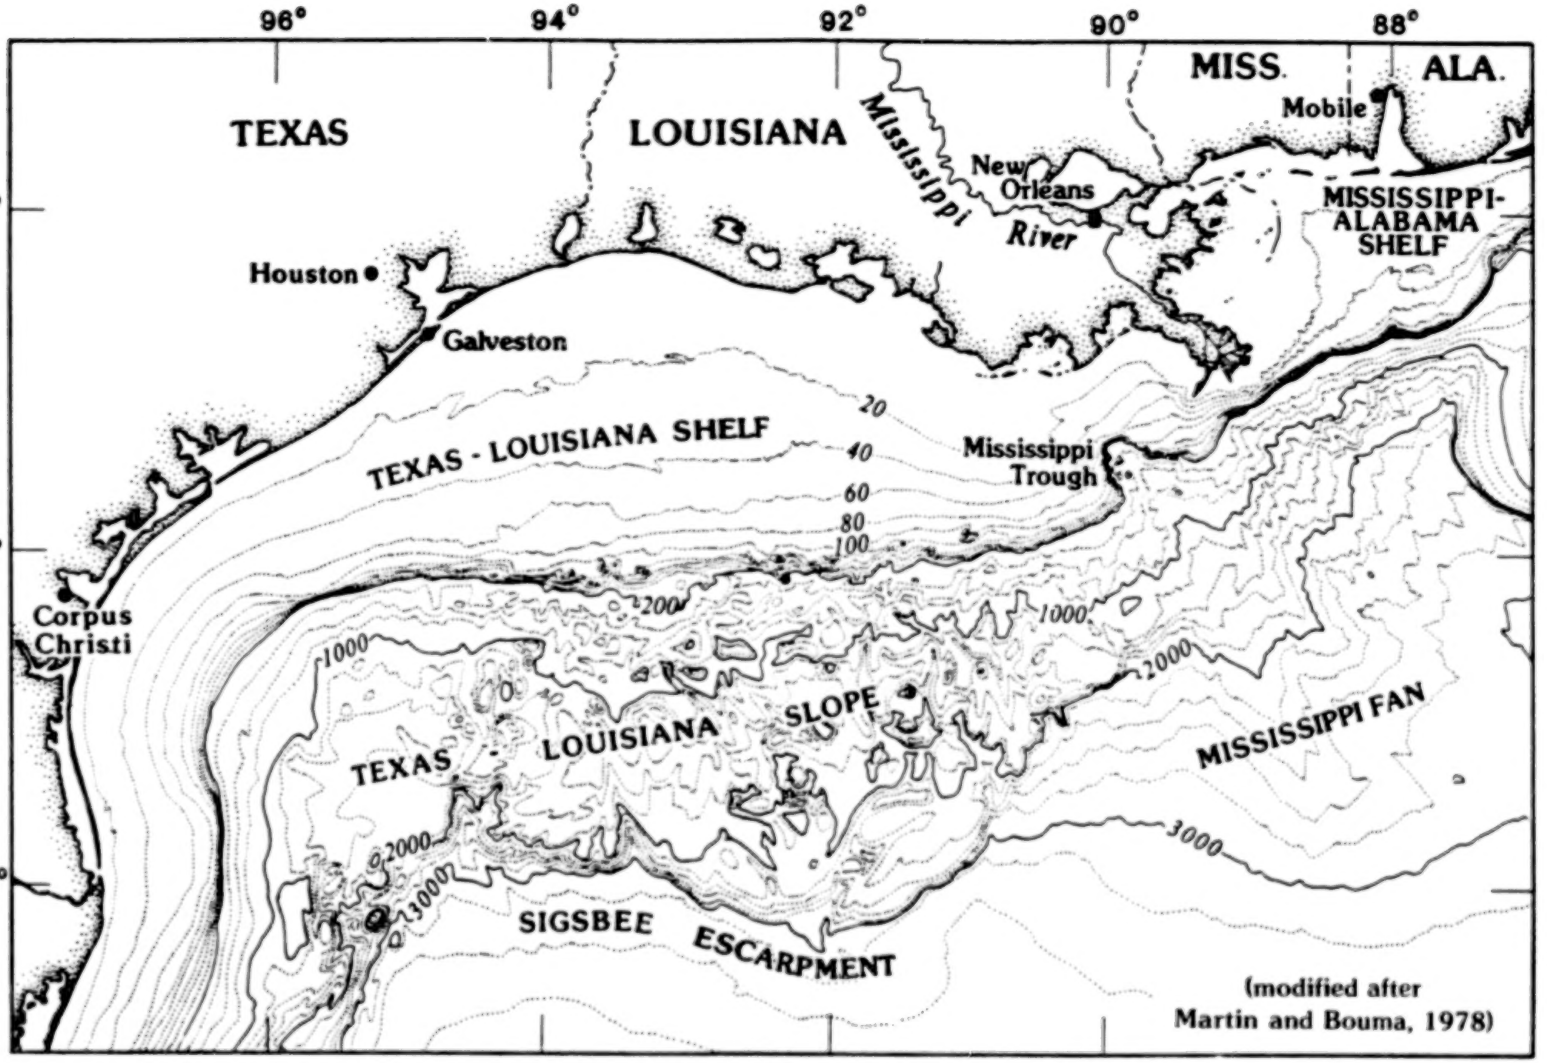

Figure 1. Regional bathymetric map of the northern Gulf of Mexico Basin. Bathymetric contours in meters. Note the highly irregular relief on the outer continental shelf and slope (modified after Marin and Bouma, 1978)

AS SUBMITTED BY AUTHOR

34

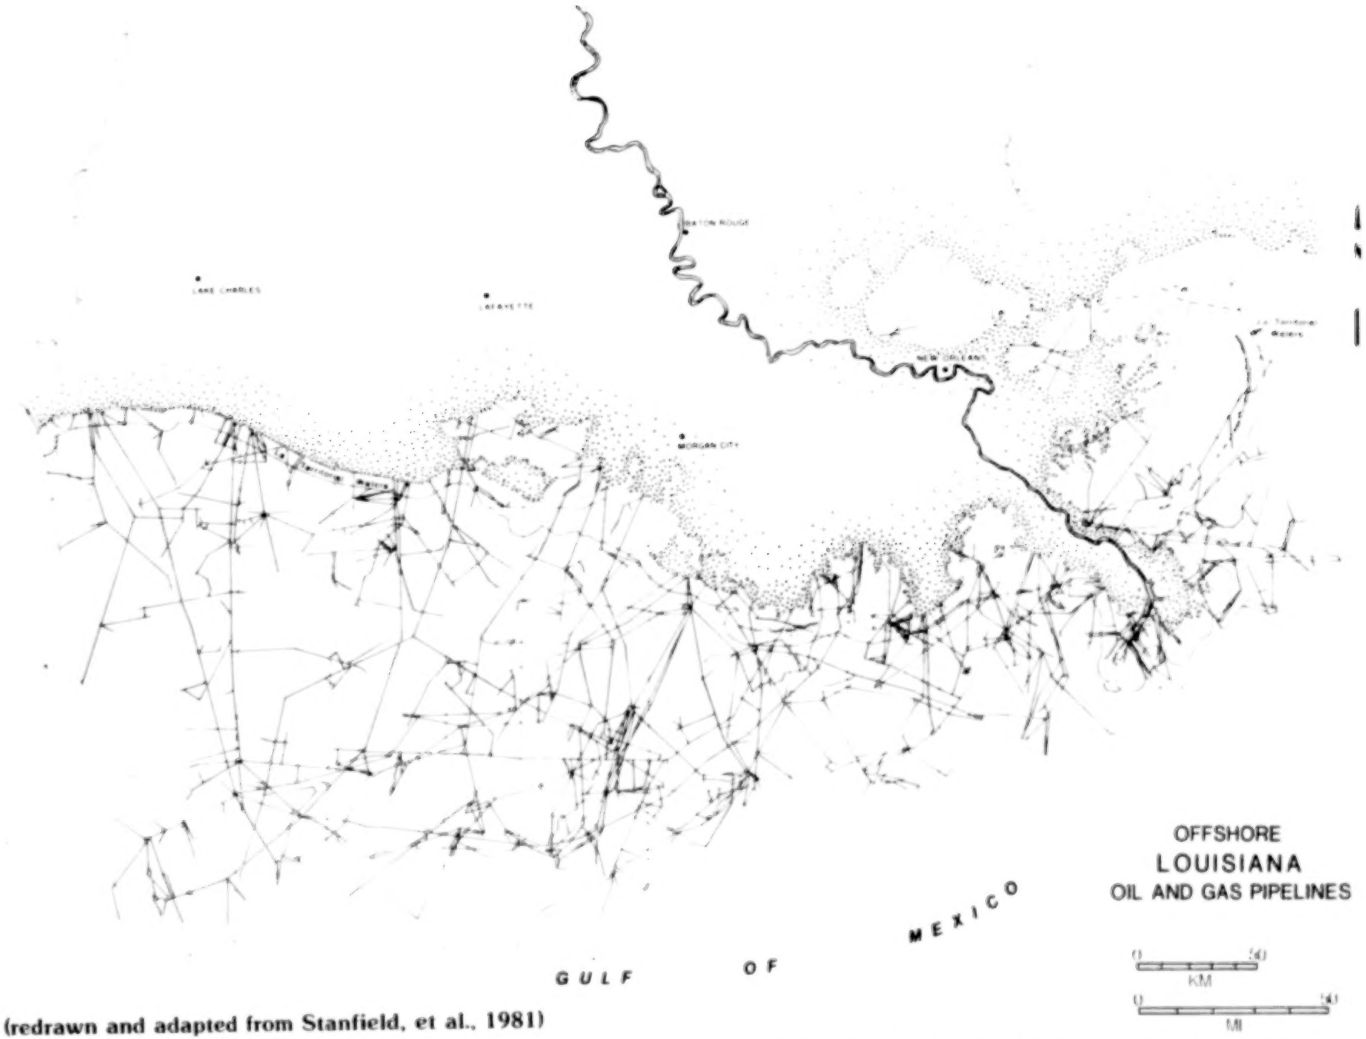

(redrawn and adapted from Stanfield, et al., 1981)

Figure 2. Major oil and gas pipelines on the Louisiana OCS. Over 15,000 miles of pipelines and cables have been installed in the last 50 years (redrawn and adapted from Stanfield et al., 1981).

AS SUBMITTED BY AUTHOR

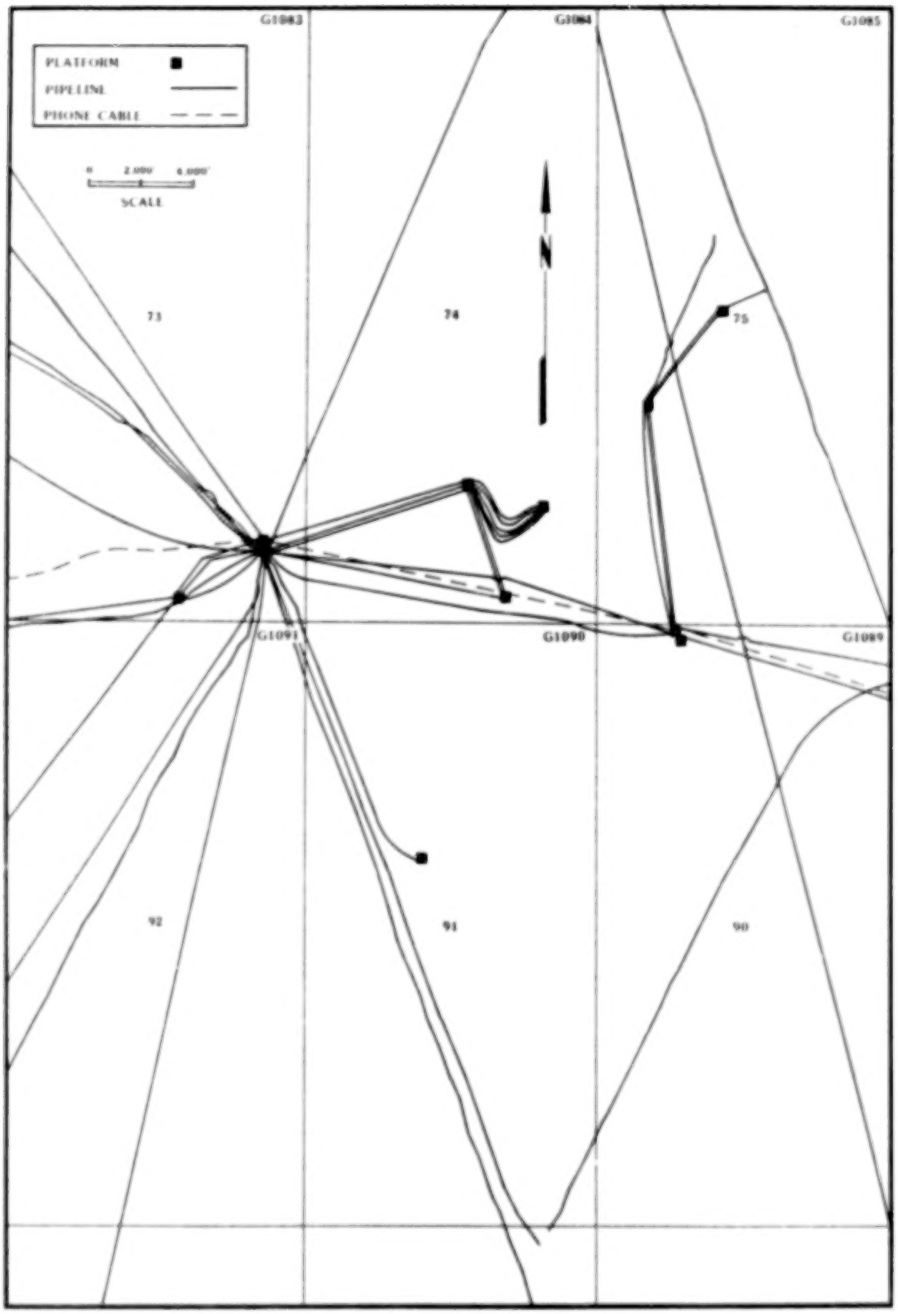

Figure 3. Major oil and gas production platforms, pipelines, and cables located within the western part of the West Delta Planning Area. The high density of oil and gas development and production equipment is more apparent on a local scale (pipeline map provided by the U.S. Dept. of the Interior, Minerals Management Service, New Orleans District).

AS SUBMITTED BY AUTHOR

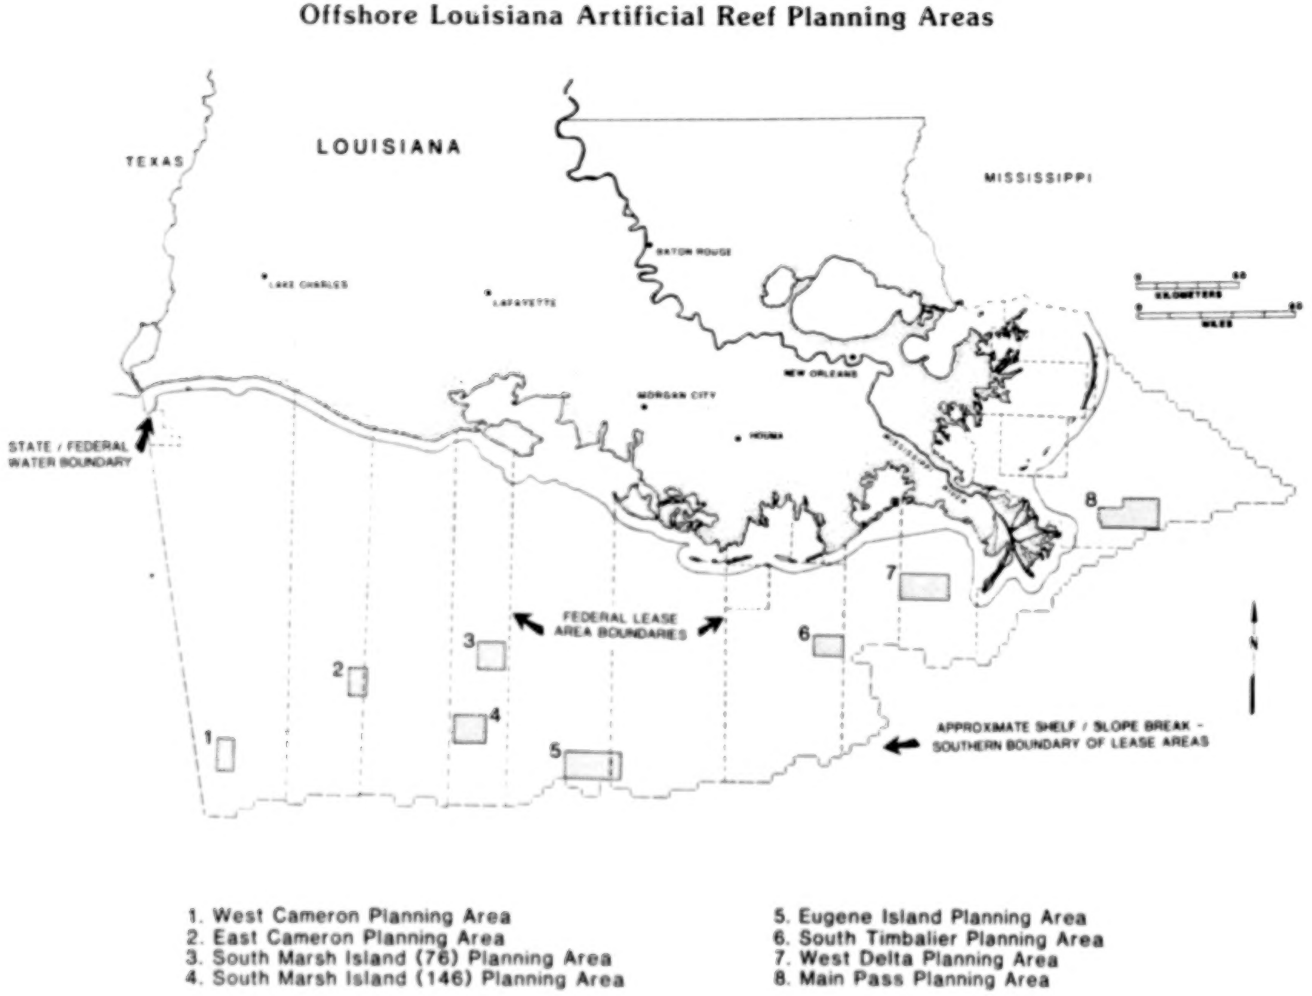

Figure 4. Designated artificial reef planning areas on the Louisiana OCS where reefs may be located (from Wilson et al., 1987).

AS SUBMITTED BY AUTHOR

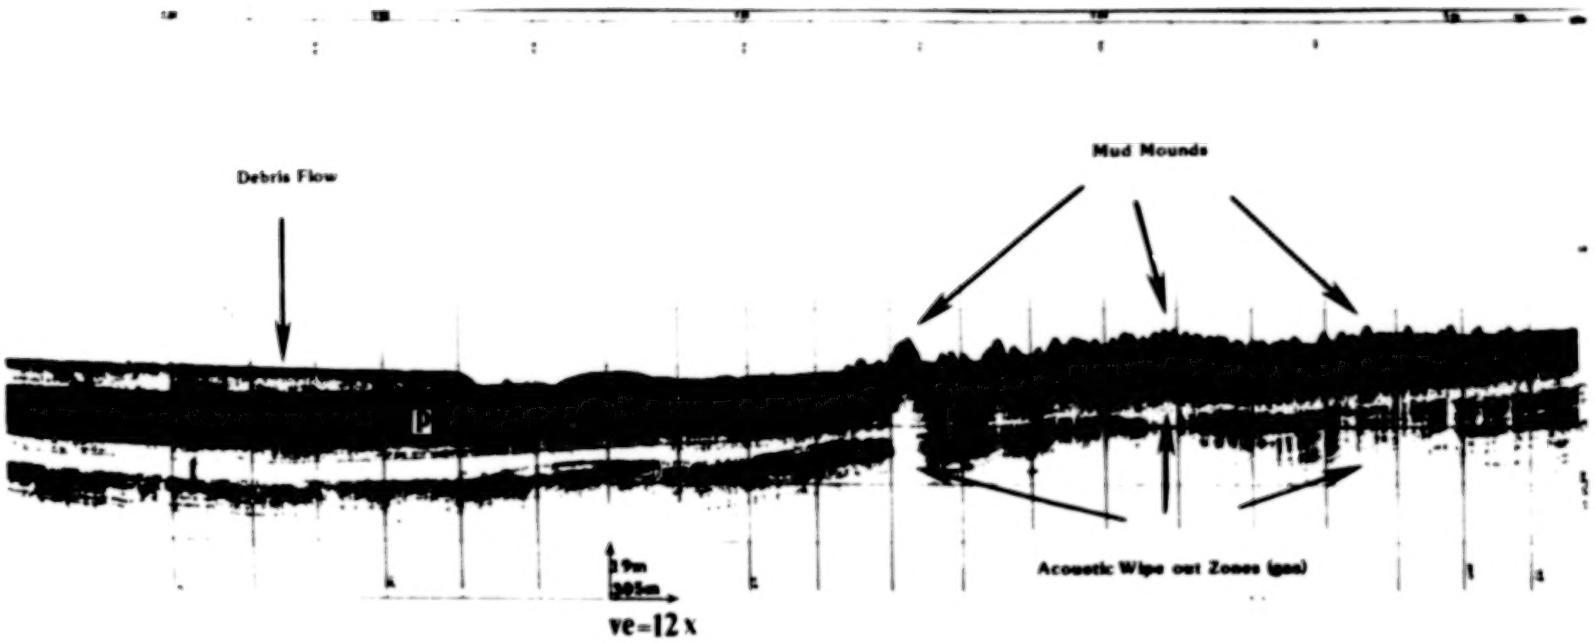

Figure 5. A 3.5-kHz subbottom profile acquired by the USGS from Eugene Island Block 393 (MMS Prelease Sales 67, 69, 1982). Depositional processes are inferred through analysis of the seismic reflection characteristics. Debris flow deposits associated with mass movement are characterized by semi-transparent to chaotic reflectors. Mud mounds are topographic features formed on the seafloor by escaping gas from the subsurface, which liquefies the sediments into these cone-shaped features. Mud mounds are generally characterized by acoustically transparent reflectors.

AS SUBMITTED BY AUTHOR

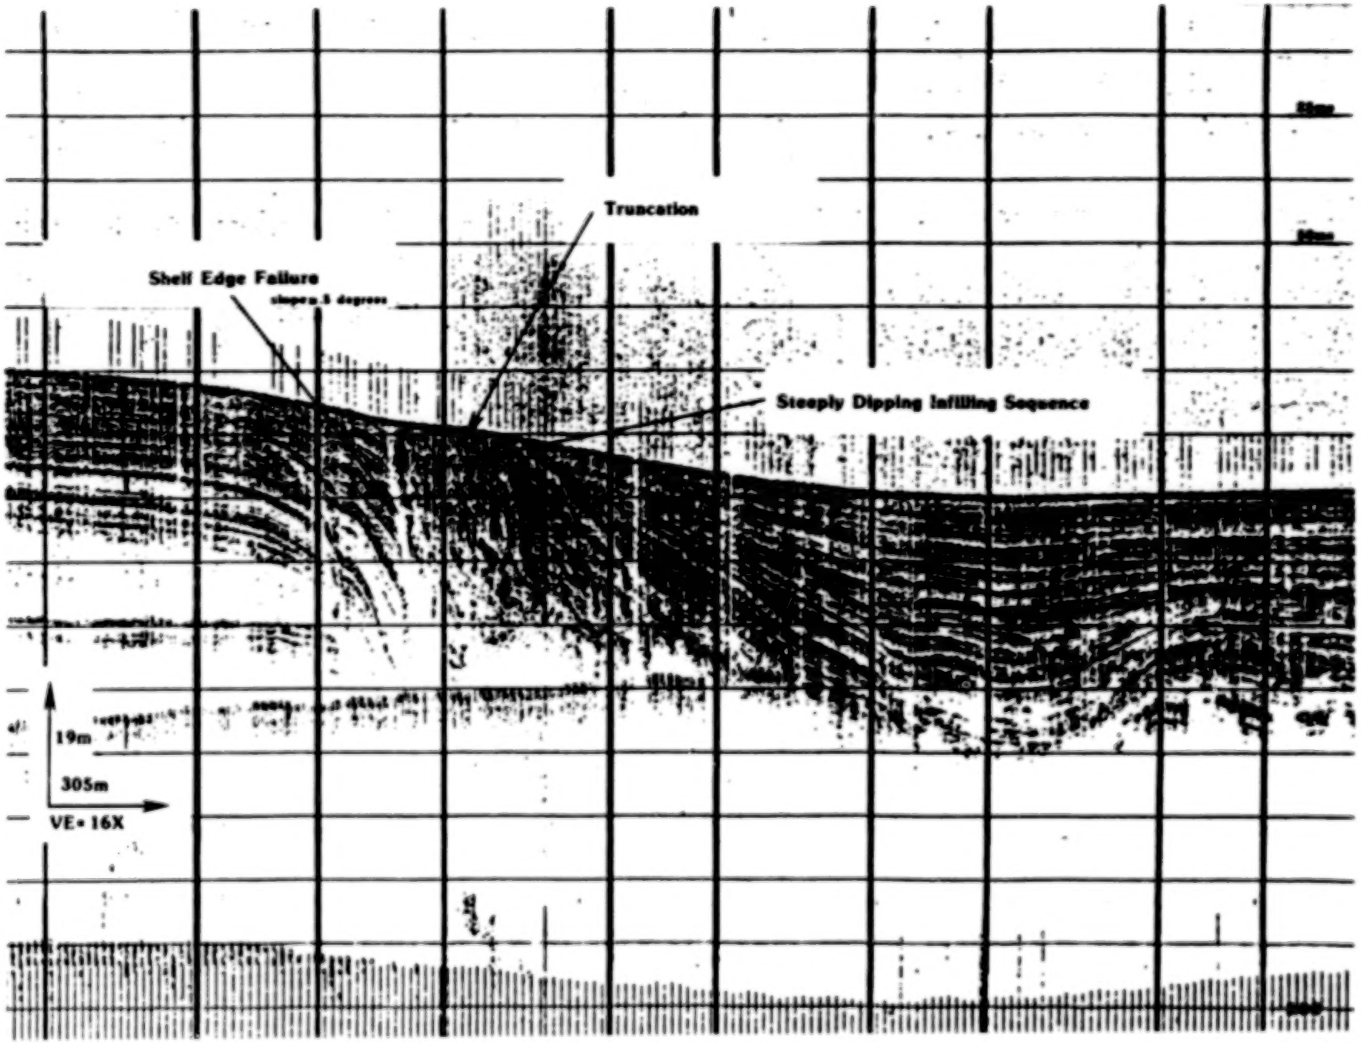

Figure 6. A 7.0-kHz subbottom profile acquired by USGS from South Timbalier Block 154 (MMS Prelease Sale 36, 1974). Steeply dipping and truncated chaotic to rumpled reflectors observed in this profile are inferred to represent slumped sediments near the shelf edge.

AS SUBMITTED BY AUTHOR

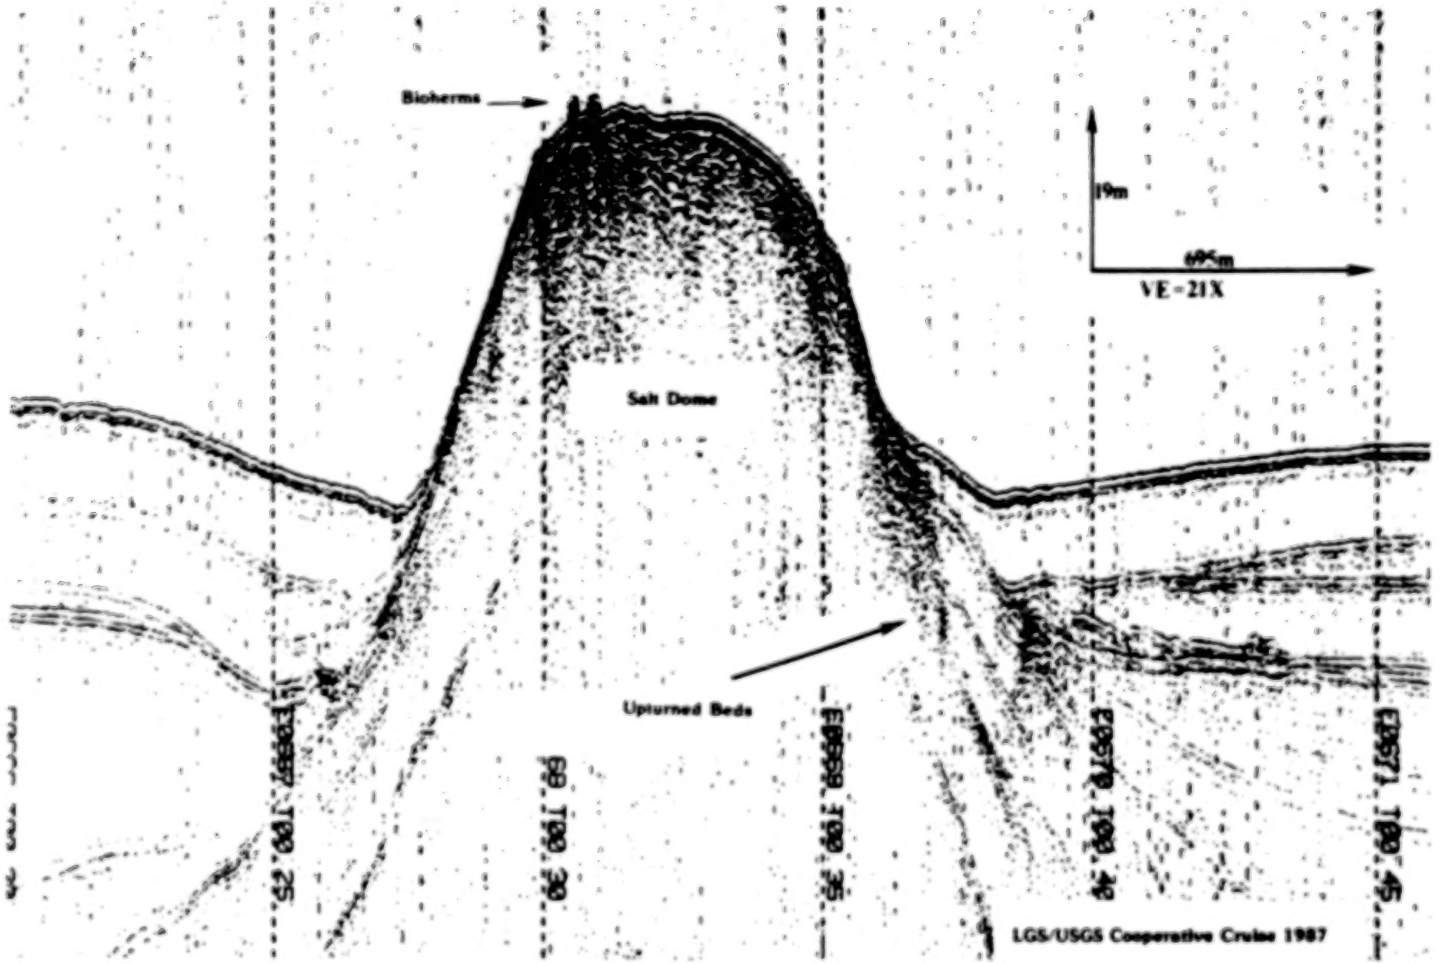

Figure 7. An ORE Geopulse* profile acquired jointly by the USGS and LGS from Main Pass Block 305, 1987. Profile illustrates a salt diapir that has penetrated the seafloor, creating seafloor relief in excess of 138 ft (42 m). The crest of the diapir has also been colonized by bioherms, or natural reefs. Profile courtesy of J.R. Suter and S. Penland, Louisiana Geological Survey. *Use of trade names does not imply endorsement by the Louisiana Geological Survey or the Louisiana Department of Wildlife and Fisheries.

AS SUBMITTED BY AUTHOR

BLANK PAGE

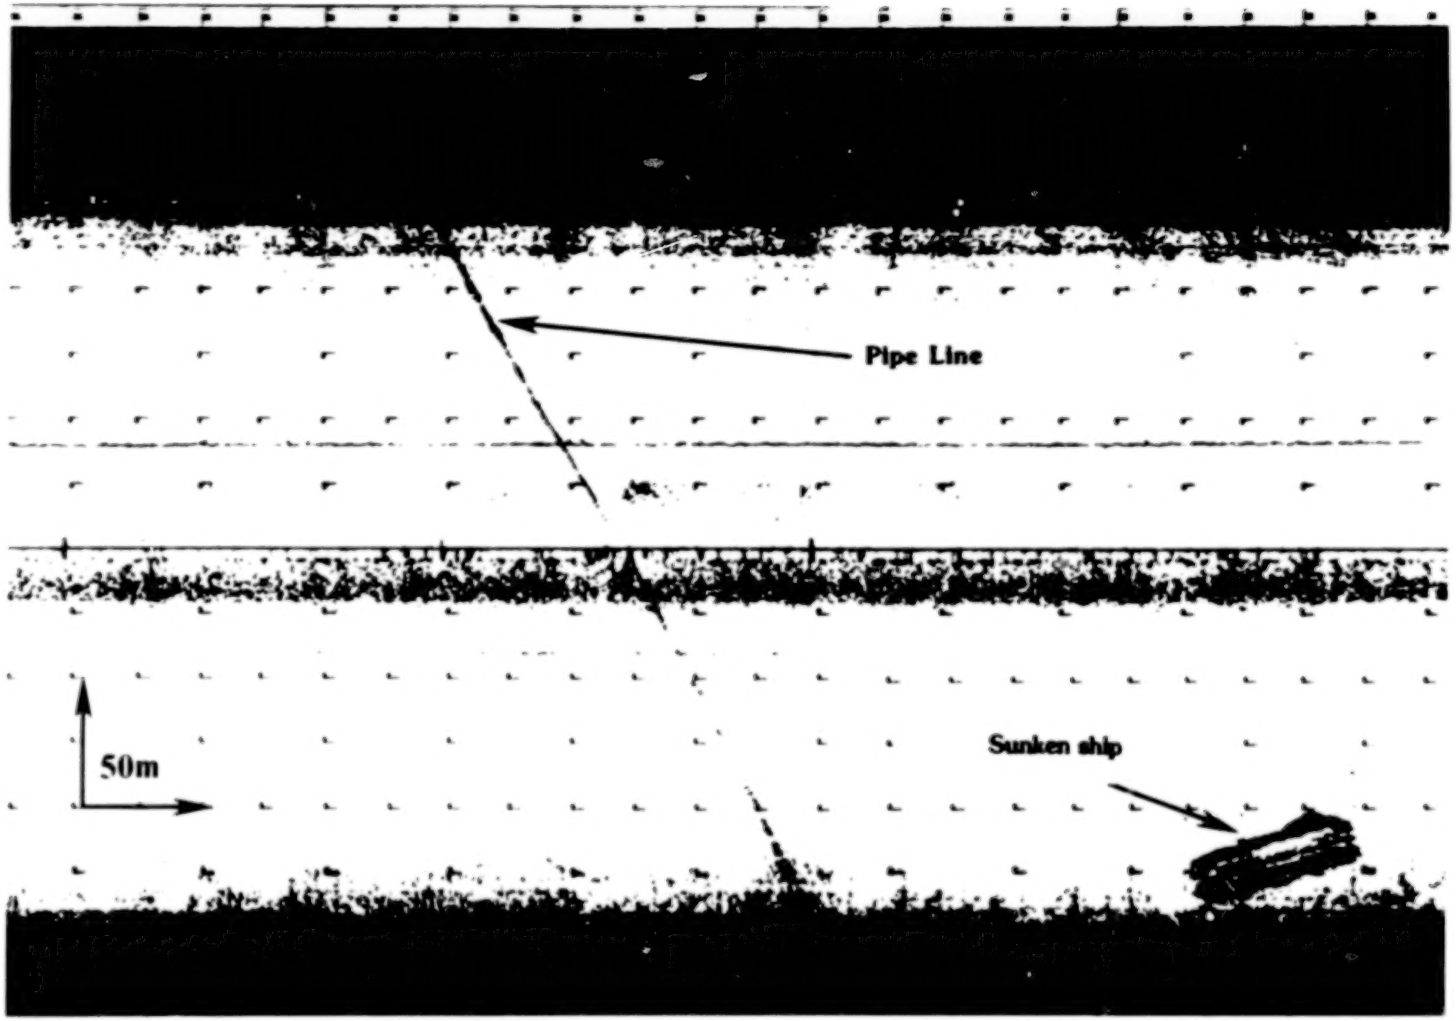

Figure 8. A 105-kHz side-scan sonograph acquired by the USGS from Main Pass Block 146 (MMS Prelease Sales 67, 69, 1982). The side-scanning sonar has detected a pipeline and sunken vessel on the seafloor, which is serving as an artifical reef. The surface sediments are inferred to be primarily composed of fine-grained silts and clays.

AS SUBMITTED BY AUTHOR

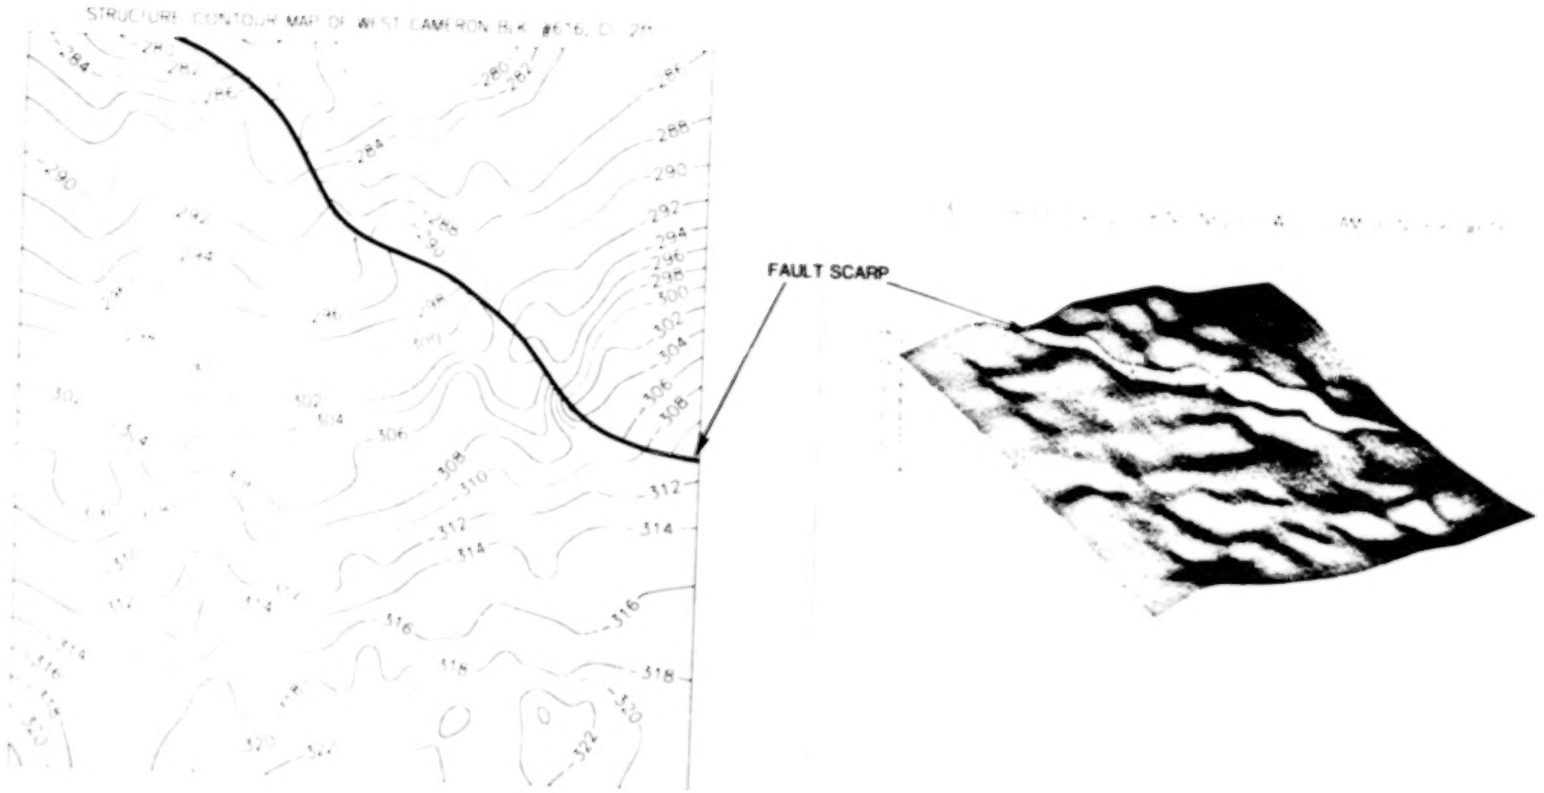

Figure 9. A structure contour map and 3-dimensional perspective of West Cameron Block 616, interpreted from 3.5-kHz subbottom profiles acquired in 1974. An active growth fault with seafloor relief of up to 26 ft (8 m), and numerous gas seeps and mud mounds were interpreted from the profiles. Map and 3-d perspective prepared by John B. Wagner.

AS SUBMITTED BY AUTHOR

CONSTRAINTS / IMPACTS	Excessive compaction	Reef instability	Damage to live reefs and the marine ecosystem	Damage or loss of pipelines, cables, sub sea equipment	Interference with commercial and industrial operations	Liability to state	Reef permitting problems
Active faults							
Steep and irregular seafloor topography							
Gas seeps and gas-charged sediments, mud mounds, very soft sediments							
Mud, gravity,and debris flows							
Salt intrusions, reefs, and bioherms							
Major storm, and hurricane generated waves							
Pipelines, communication cables, and sub sea production equipment							
Active minerals leases							
Navigational fairways, military zones, shrimp and fish trawling areas							

Table 1. Geological and technological constraints to reef siting compared with associated impacts or risks due to improper site selection.

AS SUBMITTED BY AUTHOR

BLANK PAGE

Factors Influencing Community Structure and Fish Stocks on Offshore Platforms

Ms. Ann L. Holmquist
Chevron Oil Field Research Co.
La Habra, California

Fouling communities on two oil platforms offshore Southern California were sampled quarterly over a period of several years to investigate relationships between biomass, fish stocks, and environmental factors. Divers collected samples of fouling organisms at 8-16 stations to -80 ft (-24.4 m). Thickness of the growth as well as fish species and abundance was recorded. Other parameters measured included significant wave height, water temperature, conductivity and transmissivity, and chlorophyll. Fouling samples were weighed and organisms were identified to lowest appropriate taxa. Mussel shells were measured to provide estimates of growth rates and recruitment. Data were analyzed using multivariate techniques to examine relationships among the various parameters. Preliminary analyses indicated that depth, temperature, food availability, and significant wave height influenced community development and biomass on the platforms. Significant differences in fish populations, including species composition and abundance, were observed at the two sites. These analyses indicated the importance of certain parameters in the development of the fouling community and fish stocks at a site; these parameters could be useful predictors for selection of sites for offshore platforms as artificial reefs.

Ms. Holmquist is a research ecologist at the Chevron Oil Field Research Company in La Habra, California. She received her Ph.D. from the University of Southern California in biological sciences and is considered a specialist in biological oceanography and comparative endocrinology.

Some Comparisons Between Communities Beneath Petroleum Platforms Off California and in the Gulf of Mexico

Dr. Ann Scarborough-Bull
Member, American Academy of Underwater Sciences

Communities beneath petroleum platforms off California and within the Gulf of Mexico are obviously characterized by distinct regional faunal assemblages and species associations. There are ecological features unique to each region, and platform assemblages differ from those in nearby natural environments to varying degrees. The present observations relate only to "offshore" platforms. For California, "offshore" refers to platforms located in water greater than 146 ft (45 m) in depth. For the Gulf of Mexico, "offshore" refers to platforms located in 98 to 195 ft (30 to 60 m) of water off the coast of Louisiana.

A single platform in 130 to 195 ft (40 to 60 m) of water may add 2 to 3 acres (0.8 to 1.2 hectares) of hard substrate. In both regions, the submerged portion of platforms, known as jackets, are quickly covered with biofouling organisms requiring suitable substrate for metamorphosis to adulthood. Over time the jacket will support a complex invertebrate community. Shells of primary fouling organisms provide surface of attachment for secondary organisms, and the ensuing tangle provides habitat and protection for motile epibiota.

Along the California coast, mussels (*Mytilus edulis* and *Mytilus californianus*), barnacles (*Megabalanus californicus* and *Balanus* spp.), starfish (*Pisaster giganteus* and *Pisaster ochraceus*), strawberry anemones (*Corynactis californica*), and ostrich-plume hydroids (*Aglaophenia struthionides*) are common. Mussels, barnacles, and starfish are characteristically found together in shallow and intertidal waters.

Platform Hogan, one of 29 platforms off California, was installed in 1967 and stands in 150 ft (46 m) of water, 3.2 mi (5.1 km) WNW of Ventura. As such, it represents the oldest platform off California in Federal waters. As of November 1987, barnacles (*Balanus* spp. and *M. californicus*) dominated the high energy splash-zone from the surface to about 6.5 ft (2 m). From 6.5 to 29 ft (2 to 9 m) the bay mussel (*M. edulis*) dominated the invertebrate assemblage by weight. Innumerable brittle stars (*Ophiothrix spiculata*), young sand starfish (*Astrotecten verilli*), and purple sea urchins (*Stronglyocentrotus purpuratus*) were contained within this 1 ft (0.3 m) thick mussel mat. From 29 to at least 81 ft (9 to at least 25 m), *M. californianus* dominated the assemblage in biomass and created mats nearly 3.3 ft (1 m) thick in many areas. This thicker mat provided habitat and cover for rock crabs (*Cancer antennarius*), juvenile cabezone (*Scorpaenichthys marmoratus*), and brown rockfish (*Scorpaena guttata*). In one location, clumps of *M. californianus* apparently had broken away from the structure leaving a relatively clean substrate. Hundreds of plumose anemones (*Metridium senile*) had attached; it was the dominate organism in this area.

Although mussels were the dominate fouling organisms by weight, the strawberry anemone (*C. californica*) appeared to cover at least 75 percent of available surfaces, including mussel and barnacle shells below 52 ft (16 m). *C. californica* occurred as shallow as 6.5 ft (2 m), but became very dense by 52 ft (16 m) and continued to at least 81 ft (25 m).

M. edulis, *M. californianus*, *P. giganteus*, and *P. ochraceus* occurred at depths below those they normally inhabit along the coast or in similar natural locations, e.g., the Santa Barbara Channel Islands. *P. giganteus* and *P. ochraceus* greater than 30 and 24 inches (75 and 60 cm) in diameter, respectively, were present on dense mats of *M. californianus*. Many of the starfish appeared to feed on the smaller secondary mussels. The primary *M. californianus* were often in excess of 8 inches (22 cm) in length.

The unusual size of *M. californianus* is likely due to its location, independent filter-feeding, and a nearly unlimited supply of phytoplankton upon which to feed. Their expansion of vertical depth range may be due to lack of competitors and/or a paucity of predators. Species that normally compete with or prey upon mussels along the coast may not possess pelagic larvae, as do mussels, and therefore would not be capable of populating platforms in large numbers.

The unusual size of *Pisaster* spp. is likewise probably due to increased food and decreased energy output to attain that food. Expansion of their vertical depth range may be a direct result of the range expansion of their principal food, *M. californianus*.

There are approximately 4,000 platforms in the central and northwestern Gulf of Mexico. Of these, 3,100 are located off the coast of Louisiana. Over 90 percent of the larger multi-well structures occur in offshore waters and account for well over 90 percent of all hardbottom substrate off Louisiana.

The Louisiana coast is largely mud and sand with little habitat diversity. Few representatives of Louisiana coastal fauna occur on offshore platforms. It is assumed that originally many of the biofouling and epibiotic organisms that inhabit offshore platforms traveled as pelagic larvae for extended periods over relatively long distances. As a species successfully settled on a Gulf platform and reached maturity, its larvae would not necessarily need to travel far to reach a similar habitat (another platform). Several species, e.g., the tessulated blenny (*Hypsoblennius invemar*), hermatypic corals (*Porites asteroides* and *Mussa angulosa*), the bristle worm (*Hermodice carunculata*), and the octocoral (*Telesto riisei*) apparently have spread easterly among offshore platforms during the past 8 to 10 years.

Species representing the Carolinean biogeographic region include the Atlantic winged oyster (*Pteria colymbus*), the apple murex (*Murex pomum*), and sargassum seaweed. The tessulated blenny (*H. invemar*) and the anemone (*Anemona antilliensis*) are included among the representative of the Antillean region and are becoming more common on offshore platforms. The Mexican region is represented by the pen shell (*Atrina serrata*), the mossy ark (*Arca imbricata*), and the deer cowrie (*Cypraea cervus*) among others. Deer cowries in excess of 5 inches (12.5 cm) have been collected from offshore platforms less than 30 miles (48.3 km) from the coast of Louisiana.

Tropical fauna from the Caribbean region probably constitute the greatest expansion of species range from a biogeographical region. Vertebrates and invertebrates from tropical waters are highly diverse under offshore platforms, but both are low in relative biomass. However, tropical invertebrates may dominate in coverage of available substrate. Currents carrying larval stages sweep counterclockwise into and across offshore waters of the Gulf of Mexico.

The tropical octocoral, *T. riisei*, can literally blanket jackets of offshore platforms from

depths of 29 to at least 105 ft (9 to 32 m). *T. riisei* commonly produces branched colonies up to 8 inches (20 cm) thick and harbors bivalves and other organisms within its maze. The tree oyster (*Ostrea frons*), pen shell (*A. serrata*), and ark (*A. imbricata*), which cling by byssal threads or require a small surface area for attachment, are often found by the hundreds within blankets of *T. riisei*.

The occasional inshore Louisiana oysters (*Crassostrea virginica*) found on offshore platforms usually exceed 6 inches (15 cm) in length. Unusually large specimens of the venomous bristle worm (*H. carunculata*), which prey on *T. riisei* and *A. antilliensis*, can reach a painful density of nearly 1 per ft^2 (4-6 per m^2) on offshore platforms heavily colonized by the octocoral. Additional motile epifauna include gastopods, e.g., the Caribbean triton (*Cymatium nicobaricum*) and oyster snail (*Thais haemastoma*). Both juvenile and adult stages of the arrow crab (*Stenorhynchus seticornis*), stone crab (*Menippe mercenaria*), and spiny lobster (*Panilurus argus*) are not uncommon on offshore platforms.

Fishes associated with Gulf platforms can be generalized as either residents or transients. Resident fishes depend on the platform for food and/or cover. The high number and diversity of immature tropical fish, e.g., French angel (*Pomacanthus paru*), queen or blue angel (*Holacanthus* spp.), blue tang (*Acanthurus coruleus*), cocoa damsel (*Pomacanthus variabilis*), dusky damsel (*Pomacanthus dorsopunicans*), and sergeant major (*Abudefduf saxatilis*), indicate that resident fishes are successfully reproducing under offshore platforms.

It is not surprising that immature fishes are not usually found in large numbers at the same platforms as adults of the same species. As fish hatch and enter the plankton they would likely disperse to platforms away from their structure of origin. An exception occurs with blennies, which lay eggs and brood their young within the empty barnacle shells they inhabit and may be observed in all life stages under a single platform.

During the summer months, within 2 to 3 days after an area has been cleaned to the bare metal for industrial inspection, a mating pair of spotfin butterfly (*Chaetodon capistratus*) or blue angel (*Holacanthus bermudensis*) move into and defend the cleaned area. Pairs of sergeant major (*A. saxatilis*) pick an area clean and use it as a nesting site. Afterward the male staunchly defends the developing young.

Additional tropical residents include creole fish (*Parathias furcifer*), flamefish (Apogon maculatus), Spanish hogfish (*Bodianus refus*), stoplight parrotfish (*Sparisoma viride*), ocean surgeon (*Acanthurus bahianus*), and squirrelfish (*Holocentrus* spp.).

Resident temperate species are high in biomass but have little relative species diversity. Common temperate residents under offshore platforms include spadefish (*Chaetodipterus faber*), lookdown (*Selene vomer*), many species of snappers (*Lutjanus* spp.) and groupers (*Epinephelus* spp.).

Most large predators observed under platforms offshore Louisiana are temperate species of transient nature. However, each offshore platform seems to have a resident barracuda (*Sphyraena barracuda*) every 33 to 50 ft (10 to 15 m) of depth. Large transient predators include bluefish (*Pomatomus saltatrix*), many species of jackfish (*Caranx* spp.), and amberjack (*Seriola dumerili*).

The reasons for increased vertical range and the unusually large size of some species on

Louisiana offshore platforms are thought to be analogous with the proposed causes of this phenomenon observed off California. Since many species that inhabit Louisiana offshore platforms originated in distant regions, the effects of decreased competition and/or predation may be more pronounced in the Gulf of Mexico.

California platform assemblages resemble groups found in similar natural habitats. Louisiana offshore platforms are unique ecosystems bearing little resemblance to the natural habitat. Gulf platforms apparently allow the expansion of species range from a number of biogeographical regions and attract and support both temperate and tropical species simultaneously.

Dr. Ann Scarborough-Bull was born and reared in southern California. She earned her B.A. in biology/biochemistry from the University of California at San Diego and her M.Sc. and Ph.D. in zoology/fisheries and marine biology from Louisiana State University and The Marine Biological Laboratory in Woods Hole. Dr. Bull is a Master Diver who has logged many hours under Gulf of Mexico and California petroleum structures. In the late 1970's, she assisted in developing for the National Academy of Sciences a "white paper" designed to specify procedures for monitoring detrimental effects to marine fisheries from offshore platforms placed near Georges Bank. In 1987 she became a member of the Academy of Underwater Sciences. Dr. Bull has authored several articles concerning communities beneath Gulf of Mexico rigs. From 1984-1988 she was employed as a marine biologist with the Louisiana Department of Wildlife and Fisheries and has since joined the Minerals Management Service as a fishery biologist.

Technical Aspects of Converting Offshore Petroleum Platforms to Artificial Reefs

Mr. Thomas N. Carr
Mr. Raymond J. Moore
McDermott, Inc.
New Orleans, Louisiana

The technical aspects of converting offshore petroleum platforms to artificial reefs will be discussed to explain the marine salvage operations that will be used for reef conversion of Gulf of Mexico platforms.

The cost of the marine salvage operations will determine the feasibility of a proposed reef conversion, and therefore a basic understanding of these operations is necessary for planning specific platform-to-reef conversions. The removal, transportation, and installation of an obsolete platform at an artificial reef site is a major marine operation requiring extensive equipment, personnel, planning, and technical support to successfully complete the task.

Five alternate platform reef conversion options will be examined to identify technical constraints that may affect the feasibility of these proposed reef development options in structures left in place, structures partially removed, structures toppled on location, structures removed and relocated, and artificial reef complexes.

The intent of this paper is to present a pragmatic view of the operational aspects of platform removal and reuse to provide a basic introduction to the factors that determine if a reef project is feasible. The concept of converting disused offshore petroleum platforms to artificial reefs (rigs-to-reefs) has gathered a broad public and private interest and support in the last few years. This interest is evidenced by the National Fishing Enhancement Act of 1984 and Louisiana's Artificial Reef Program. Other Gulf states have established permitted reef sites and actively pursue petroleum platforms for these reefs. In spite of growing interest in this seemingly simple concept, only a small number of reefs have been created using offshore platforms because the actual conversion process is more difficult and costly than it appears. An understanding of what is involved in the conversion process is required to determine if the concept is feasible, which platforms are the most likely candidates for reef conversion, and what types of reefs are most practical.

When a platform ceases production, the operator must determine the disposition of the platform. The platform can be relocated for reuse, removed and scrapped, or relocated to an artificial reef site. Reuse of the platform is the preferred option if the platform is in acceptable condition, since it is often less costly than fabricating and installing a new platform. The alternatives are evaluated to determine the benefits and costs of each option. A critical portion of these comparisons is the cost of the marine salvage operations to remove and scrap the platform versus the cost of converting the platform to an artificial reef. These marine operations are the focus of this paper, since these costs will typically determine if a reef conversion is feasible, and a basic understanding of these operations is necessary for proposing and planning specific platform to reef conversions.

The marine salvage procedures that must be developed for a specific platform will be influenced by the platform characteristics, location and characteristics of the platform site, marine equipment available, expected weather conditions, type of reef proposed, reef site location, and reef site conditions. Most of these items are distinctly peculiar to

each platform and reef site, such that no single salvage procedure and its associated costs can be developed for all cases. Therefore, salvage procedures and costs must be evaluated on a case-by-case basis for each platform considered. The major items that control salvage procedures will be investigated to develop guidelines of what procedures and conversion options are the most feasible and cost effective for artificial reef development. The platforms and procedures addressed in the subsequent discussions are based on Gulf of Mexico platforms and marine equipment.

Platform Description

The Gulf of Mexico has over 4,000 petroleum platforms in water depths up to 1,350 ft (411.5 m) and located up to 130 mi (209 km) from shore. The majority of these structures are located in shallow water of 100 ft (30.5 m) or less, as shown in table 1. Although the function, size, and configurations of these structures vary widely, and no general descriptions can encompass all platform types, most are constructed in four major components.

These components are the superstructure or deck, the jacket, the conductors, and the piling (figure 1). The jacket rests on the ocean floor and extends to 10-20 ft (3.1-6.2 m) above the water surface. It has open pipe columns, or legs, interconnected by tubular bracing members, which make the jacket a rigid space frame structure. Tubular piling are inserted through the legs of the jacket and driven into the ocean floor. The deck superstructure is then installed onto the top of the jacket and piles. Conductors are installed through the jacket and deck for the wells, which will be drilled and completed to produce oil or gas.

The size and weight of the jacket vary depending on the water depth and the amount of deck work area required. The jacket is the portion of the platform functioning as a *de facto* reef during the platform's useful life. Its high profile and extensive surface area make it the best reef material of the platform components. The jacket is fabricated onshore in one piece and transported on a barge offshore, where it is installed.

The pilings support the weight of the platforms and resist the horizontal forces caused by current, wind, and waves. The pilings, which are steel tubular pipes, are inserted into the jacket legs and driven into the ocean floor 200-400 ft (61-122 m). The pilings are connected to the jacket with a welded connection at the top of the jacket legs.

The deck superstructure provides the work space to accommodate the equipment and personnel required for the platform's function of drilling, producing, or storage, etc. The work areas are elevated to insure that the design storm wave will not reach the lower deck.

The conductors are tubular pipes extending from the deck through guides in the jacket and driven into the soil. The wells are drilled through these conductors, and multiple strings of concentric casing pipe and drill pipe are then installed inside and grouted to the conductors.

Marine Construction

By fabricating the platform onshore in very large components, operators design offshore platforms to reduce the offshore erection time and inherent work interruptions caused by the offshore marine environment. Therefore, the jacket, piles, and deck components are very large and heavy and require specialized installation equipment. Jacket weights

can be as high as 40,000 short tons (36,288 metric tons), and decks can weigh 5,000 to 6,000 short tons (4,536 to 5,443 metric tons). Crane vessels with lift capabilities up to 5,000 short tons are available in the Gulf of Mexico to make these very heavy lifts. These crane vessels are self-contained, having accommodations for its crews, mooring systems, and anchor-handling tugs. They can perform all installation and hook-up work required. The crane vessel is assisted by cargo barges with ocean-going tugs, survey boats, dive boats, supply vessels, workboats, and helicopters for personnel transportation. These equipment spreads are very costly, and marine construction operations are meticulously planned to reduce every hour required for offshore installation. Extensive pre-job planning is directed to maximizing prefabrication to reduce offshore erection time. Transportation and installation engineering is conducted in great detail to ensure that offshore operations proceed as planned.

The platform installation begins with the jacket being set on bottom. The jacket will be lifted from the cargo barge and set with the crane vessel if its size and weight are within equipment capabilities. Larger jackets are transported and launched from a specially equipped barge. Launched jackets float in a horizontal position after launch and are upended by crane barge lifting and controlled flooding of the jacket legs.

The piles are then inserted through the jacket legs and driven using specialized offshore hammers. Typical pile sizes range from 30- to 72-inch-diameter (76.2 to 182.9 cm) with penetrations from 200 to 400 ft (61 to 122 m) below the mudline. The deck is lifted onto the piles in one section or in multiple sections if its weight or size exceeds the crane vessel capacity.

The conductors are installed by the crane vessel using the offshore hammers or by the drilling rig at a later date.

Platform Removal

For platform removal, the installation steps are reversed. The conductors must be severed 16.4 ft (5 m) below the mudline and removed. The deck sections are lifted and set on a cargo barge (figure 2). The piles are then severed 16.4 ft below the mudline. The jacket can then be lifted and set on a cargo barge if its size and weight are within the crane vessel capacity (figure 3). Jackets in water depths greater than approximately 150 ft (45.7 m) cannot be lifted vertically with current equipment available in the Gulf of Mexico, and alternate removal must be used. The majority of the existing structures and those that have been removed to date are in less than 150 ft of water, and their removal is relatively straightforward.

The platform components are then transported to shore and offloaded at commercial salvage yards. Production equipment will be removed, if it is to be reused, or purged and flushed before dismantling. The jacket and deck will be cut into small sections to be scrapped. Some components are refurbished and reinstalled at other offshore sites.

Those jackets too large to be lifted in one section with one barge require more complex removal procedures tailored to the jacket's particular characteristics. Some jackets have been cut into smaller components that can be lifted by a single crane vessel. Some jackets can be lifted and removed with the combined capacity of two crane vessels.

A few structures have been reverse-launched, where the jacket is winched back onto a launch barge. Less frequently used

are auxiliary buoyancy tanks, which are attached to the jacket for reflotation. The jacket is then towed to deeper water for ocean dumping or towed to an artificial reef site. Auxiliary buoyancy cannot be used to bring a jacket to shore since deep-water ports are not available on the Gulf Coast.

Partial removal of the jacket down to a depth allowing for safe surface navigation has been proposed, as has toppling the jacket at site. The complexity of these alternate removal methods appreciably increases removal costs.

Site Conditions

The site conditions at the platform and proposed reef site will impact the feasibility of the platform conversion.

The primary considerations in platform conversion are location, location, and location. The distance from the platform site to the reef site and the distance of both sites from the marine operations base and salvage yards are the overriding factors in most situations. Transporting the platform components and crane vessel equipment spread between sites is very slow, and the mobilization of the marine equipment spread to the reef site is a cost over and above that required for standard removal for disposal.

The platform water depth is also critical since deeper water platforms are larger and heavier, and removal is very costly, making alternatives such as reef conversion more viable. The water depth will also control the marine equipment to be used since some equipment, particularly smaller barges and lift boats, are not suitable for deep-water work. The cost of diving operations increases significantly as the water depth increases. The water depth and specified safe navigation clearance will dictate the size of jacket that can be placed at a reef site. In general, the platforms in deeper water depths have wider base dimensions and require a deep-water reef site.

The soil conditions at the platform and reef site usually do not present problems unless they are unusually unstable, as in a mudslide region where the platform components could be carried downslope with the moving soil. Areas with a steep bottom slope should also be avoided.

Wave and current at the sites can affect the workability of the marine equipment, particularly diving operations.

Obstructions such as pipelines, adjacent structures, or subsea obstructions will restrict marine equipment movements and anchoring locations, thus increasing costs.

Reef Options

Five reef options that have been proposed are examined below to identify technical constraints that affect the viability of these development alternatives.

Structures Left in Place

A structure left in place continues to provide for its established biological community and initially appears to be the most desirable option. However, there are a number of technical reasons that make this method unattractive and severely limit its feasibility. A structure left in place is a hazard to surface navigation, and the operator's residual liability is a primary concern. The life of an offshore structure can be extended beyond its design life of 20 to 25 years; but due to the harsh marine environment, it eventually will require removal. Severe corrosion, structural damage by major storms and minor vessel collisions, and cumulative fatigue

damage all limit the platform's life expectancy. Navigation aids, lights, fog horns, etc., must be continuously maintained if the platform is left in place. In addition, the platform itself requires maintenance such as painting, replacing grating, handrails, stairs, boatlandings, etc. If these items are not maintained, the platform becomes a hazard to fishermen or other uninvited guests.

The cost of maintaining the platform along with the eventual removal costs and the perpetual liability make platform retention a costly option for the responsible party and a viable option for a very small percentage of platforms in strategic high use areas.

Structures Partially Removed

A structure partially removed continues to provide for a portion of its established biological community. The deck and top portion of the jacket will be removed down to a safe navigation clearance. The upper portion of the jacket and deck can be placed on bottom adjacent to the jacket base to expand the benthic portion of the reef (figure 4).

By removing the deck and top of the jacket, the cost of maintenance, navigation aids, and future removal costs are eliminated. The perpetual liability is reduced since surface navigation concerns are eliminated. Water depths greater than approximately 200 ft (61 m) would be required to obtain the necessary navigation clearance over the jacket base remaining in place.

The conversion would be accomplished by removing the deck and then severing and removing the conductors above the cut elevation. The piles and conductors will not be severed below the mudline. The jacket legs, piles, and braces will be severed at the selected elevation while the crane vessel holds the top of the jacket to ensure it does not topple prematurely. The top portion of the jacket will then be lowered and positioned adjacent to the jacket base.

The underwater cutting of the legs, piles, and braces is a slow process with present technology, requiring extensive diving operations, which increase the cost and risk. However, the transportation cost of the components is eliminated, and some of the additional cutting costs will be eliminated. This option is competitive with removal or other reef options for platforms in sufficient water depth, approximately 200 ft (61 m) and deeper. As water depth increases and removal procedures become more complicated, this option becomes more attractive. In water depths greater than 500 ft (152.4 m), partial removal of the platform is the only realistic removal method based on currently available equipment and technology.

Present reef permitting policies are not structured to establish reef sites at scattered locations, and therefore nontechnical constraints could control the widespread use of partially removed structures.

Structures Toppled in Place

A structure toppled in place temporarily disrupts the established biological community while providing an expanded mid-water and benthic reef for future development. The deck will be removed and can be placed on bottom adjacent to the jacket (figure 5). The conductors and piles are then severed 16.4 ft (5 m) below the mudline. The jacket can then be toppled in one section.

As with partially removed structures, adequate water (approximately 200 ft [61 m]) is required to obtain navigation clearance over the jacket in its horizontal orientation. Transportation costs of the components are

eliminated, making this option competitive with removal if scattered reef sites are incorporated into reef development plans.

Structures Removed and Relocated

Removal and relocation of a structure to a designated reef site is the most likely reef conversion method for platforms in less than 150 ft (45.7 m) of water due to required surface navigation clearance. Approximately 87 percent of the platforms in the Gulf of Mexico fall into this category. Removal of the majority of these platforms is straightforward, since lifts of the component are within the capabilities of crane vessels.

The components are back-loaded onto cargo barges for transportation to the reef site (figures 6, 7, 9). The crane vessel equipment spread must then be mobilized to the reef site to lift the components from the cargo barge and set them on bottom. The cost differential between transportation to the reef site versus the salvage yard must be added to the additional cost of mobilizing the crane vessel equipment spread to the reef site. Unless the reef site is very close to the platform's original location, in most cases the salvage option will be less costly.

The proximity of the reef site to the platforms overshadows other technical considerations for this conversion method. Some of the more notable rigs-to-reefs projects transported platforms hundreds of miles from Louisiana to Florida. These were exceptions to the rule because the additional costs were acceptable to the operator. The establishment of financial or other incentives for these projects would encourage a much broader application and acceptance of this option.

The Tenneco Pensacola Reef project developed unique procedures by eliminating the crane vessel spread mobilization to the reef site. The jacket and deck were transported on a specially equipped launch barge and were launched at the reef site (figure 8).

Artificial Reef Complexes

Artificial reef complexes can be developed by using combinations of the options discussed above (figure 10). A limited number of those platforms most heavily frequented by fishermen and divers would be selected to be left in place. These platforms should be selected keeping in mind the cost associated with platform retention. Other platforms would be relocated to the reef site and placed horizontally on bottom. The platforms left in place would serve as marker platforms either at the center or the extremities of the reef site.

Water depth at the reef complex site must be sufficient to provide adequate navigation clearance for the relocated platform components. As more platform components are added to a reef complex, the underwater obstructions create problems for the marine construction operations, particularly vessel mooring and diving operations.

Reef complexes concentrate the efforts of sponsors in selected areas where popular platforms can be retained and areas can be developed. Proper planning should select areas where many potential donor platforms are available within close proximity of the reef complex site.

Summary

The concept of converting platforms to reefs is feasible. However, each proposed reef conversion project will be evaluated on its own merit considering technical constraints and economic costs.

References

McGurrin, J. M. and M. Reeff. Artificial reef development and deployment. *MTS Journal* 20(3).

National Research Council Marine Board. 1985. Disposal of offshore platforms. Washington: National Academy Press.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 17 pp.

Mr. Thomas N. Carr, a graduate of Tulane University with a BSCE, is a senior structural engineer and handles design, installation, removal of offshore structures, pipelines, marine terminals, docks, and wharfs. His recent areas of concentration are engineering development of procedures and equipment for removal of platforms. He is the inventor of equipment for platform removal and has two patents pending. Mr. Carr is a member of the National Ocean Industry Association and Platform Removal Task Force.

Mr. Raymond J. Moore attended Nicholls State University at which he studied engineering technology. Mr. Moore is a project engineer and has 18 years' experience as estimator, field engineer, and special projects engineer in offshore platform installation and removal. He is project coordinator for assembly line robotics implementation. His recent areas of concentration are in the development of operating procedures and marketing for platform removals and market development for heavy lift marine construction. Mr. Moore is a member of the American Welding Society (AWS) and is an AWS-certified associate welding inspector.

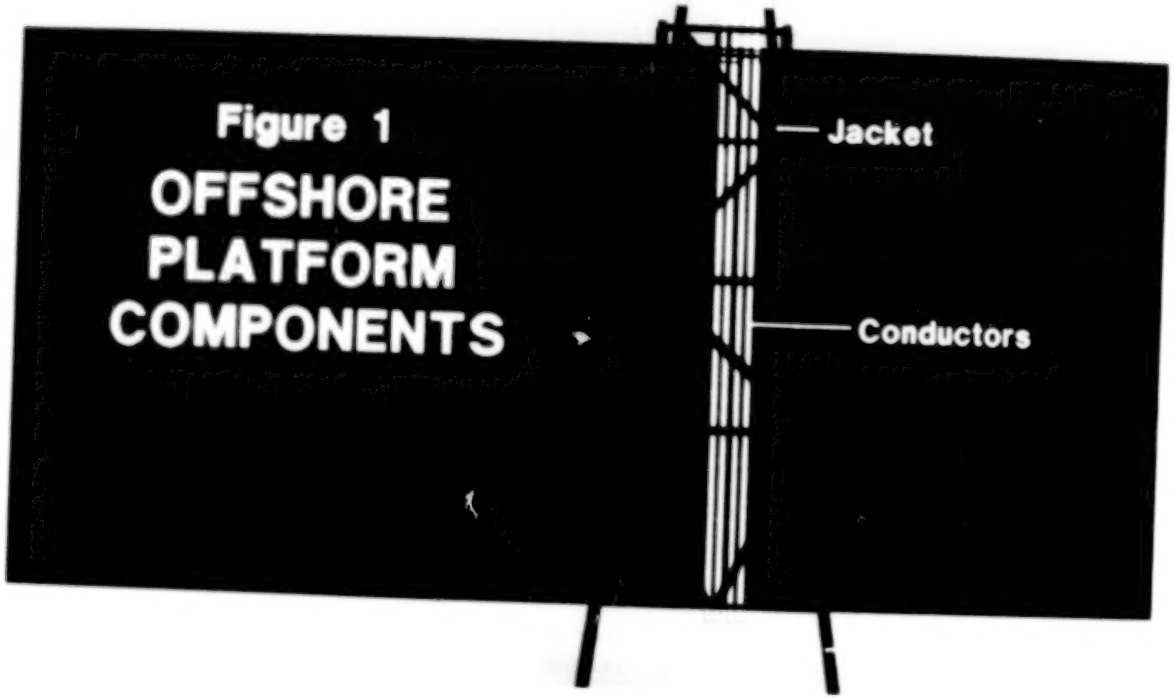
Figure 1
OFFSHORE
PLATFORM
COMPONENTS
Jacket
Conductors

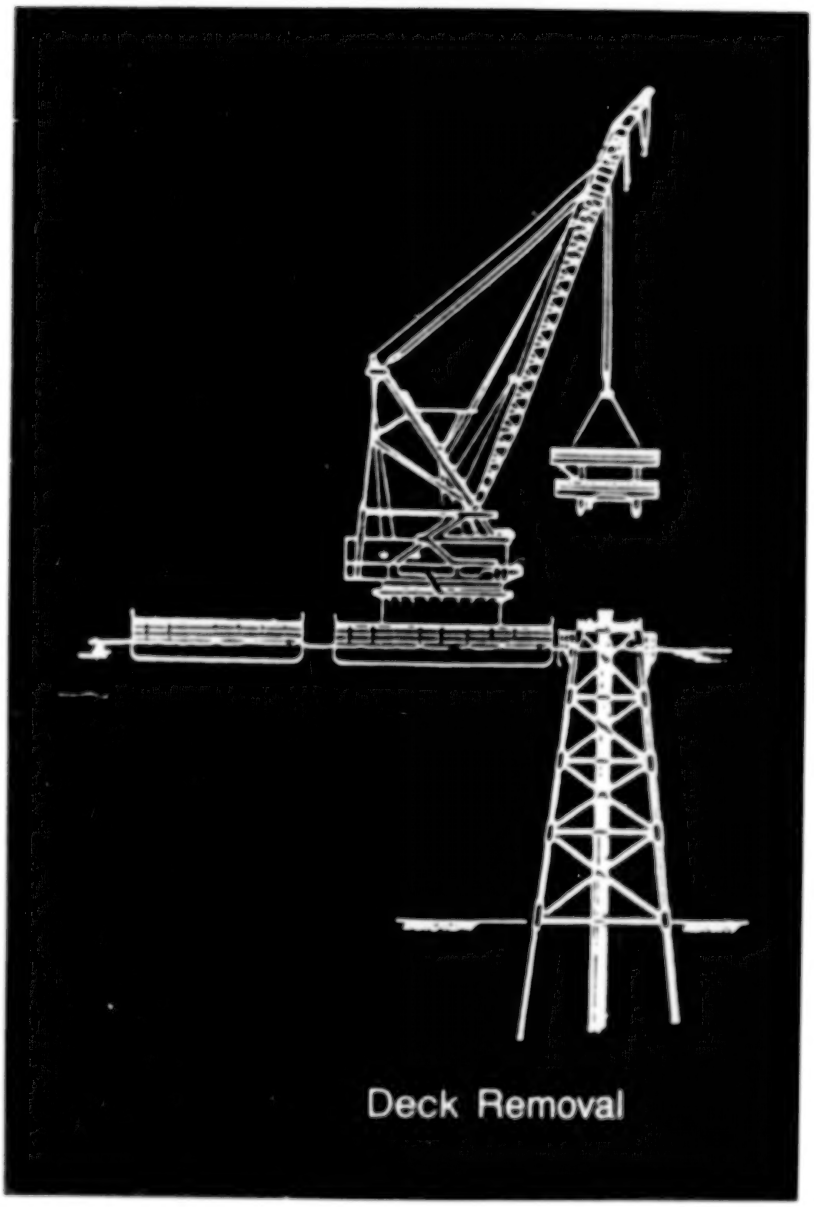

Figure 2.

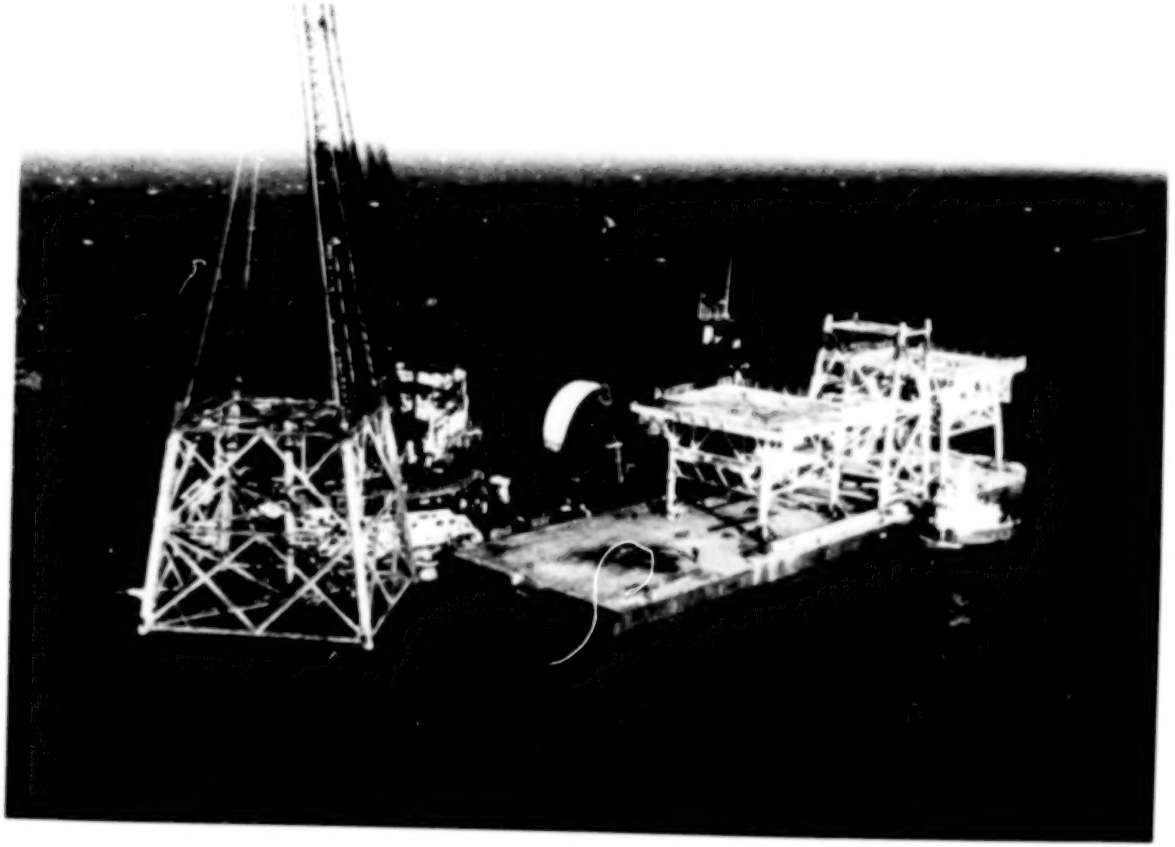

Figure 3. Jacket Removal.

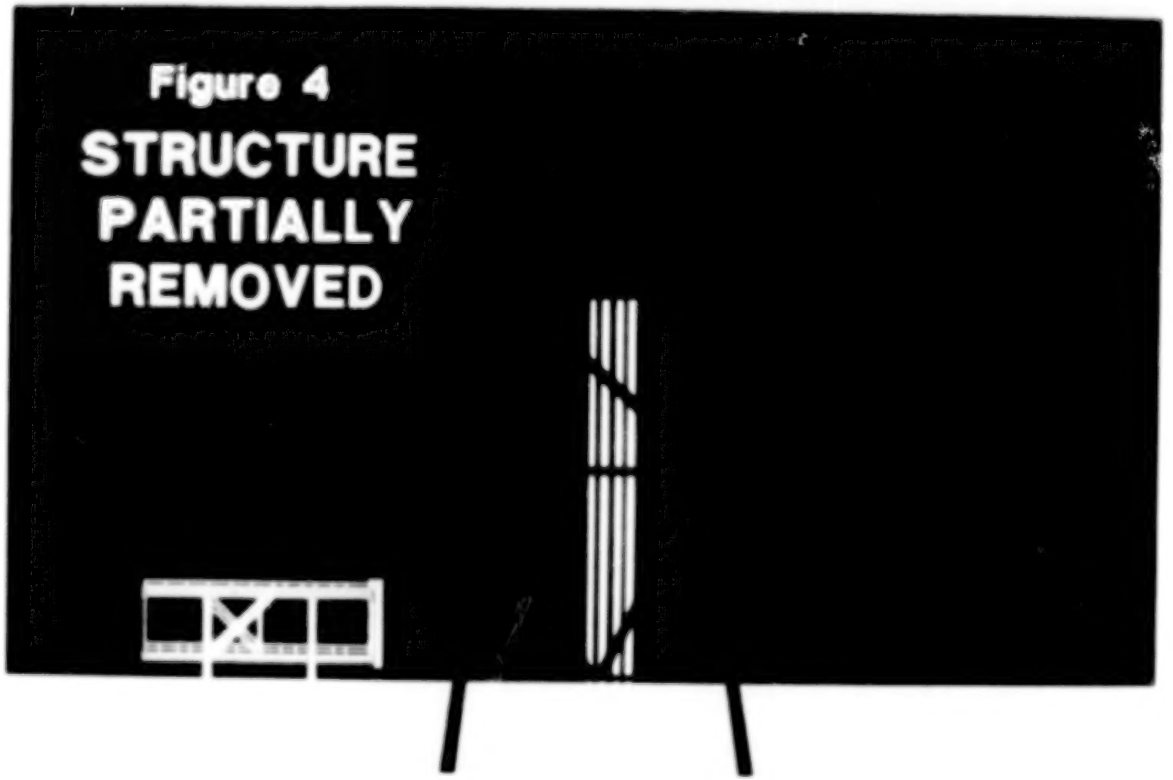
Figure 4
STRUCTURE
PARTIALLY
REMOVED

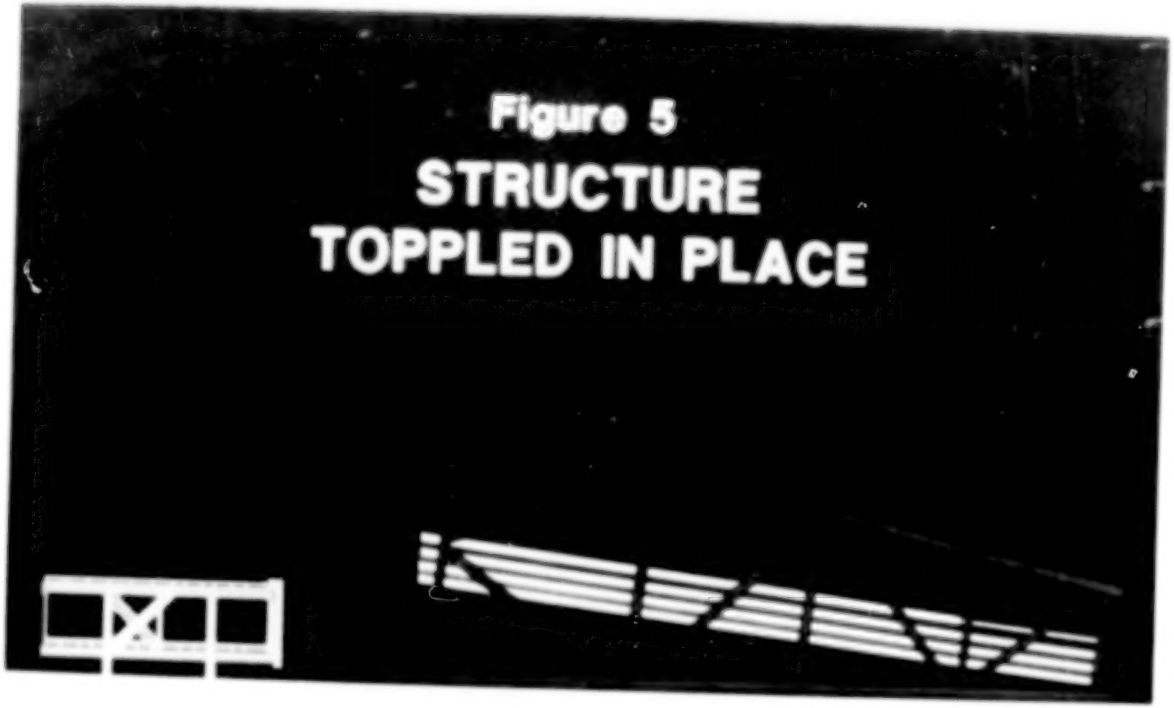
Figure 5
STRUCTURE
TOPPLED IN PLACE

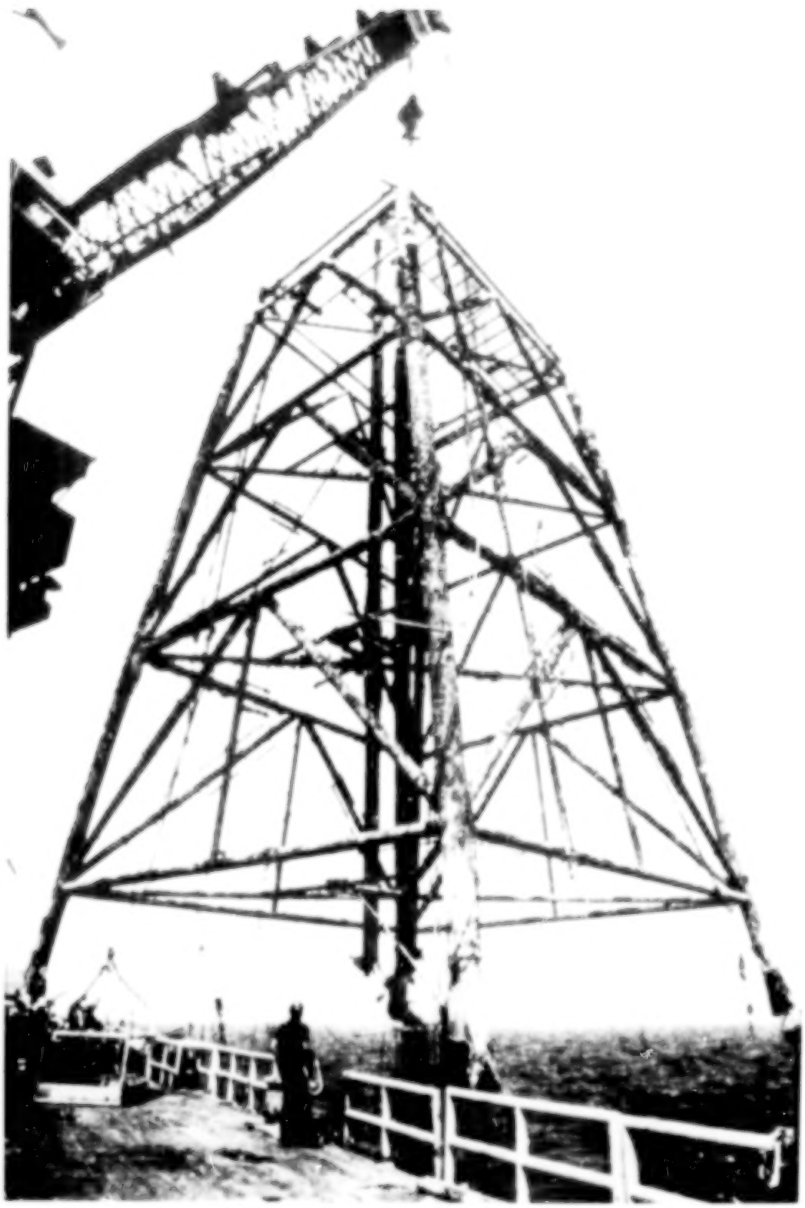

Figure 6. Jacket Removal Vertical Lift.

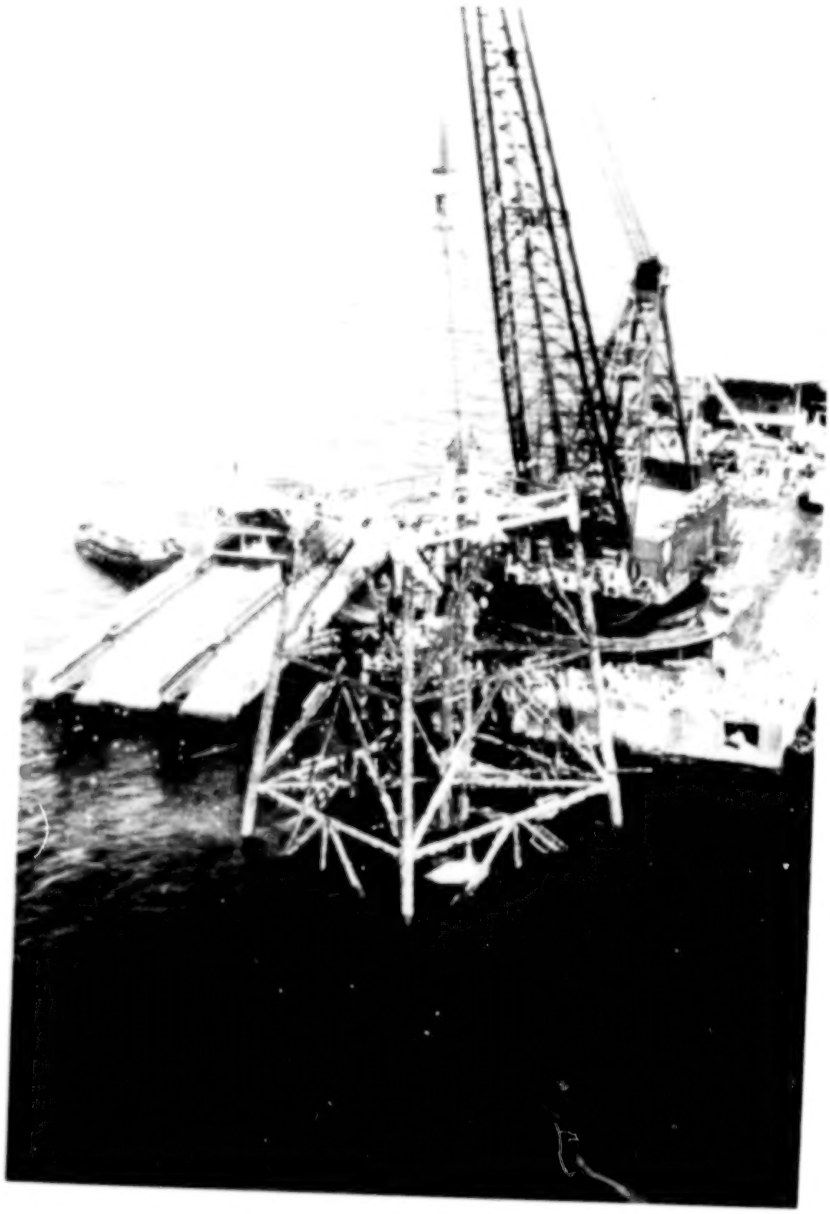

Figure 7. Jacket Removal Vertical Lift.

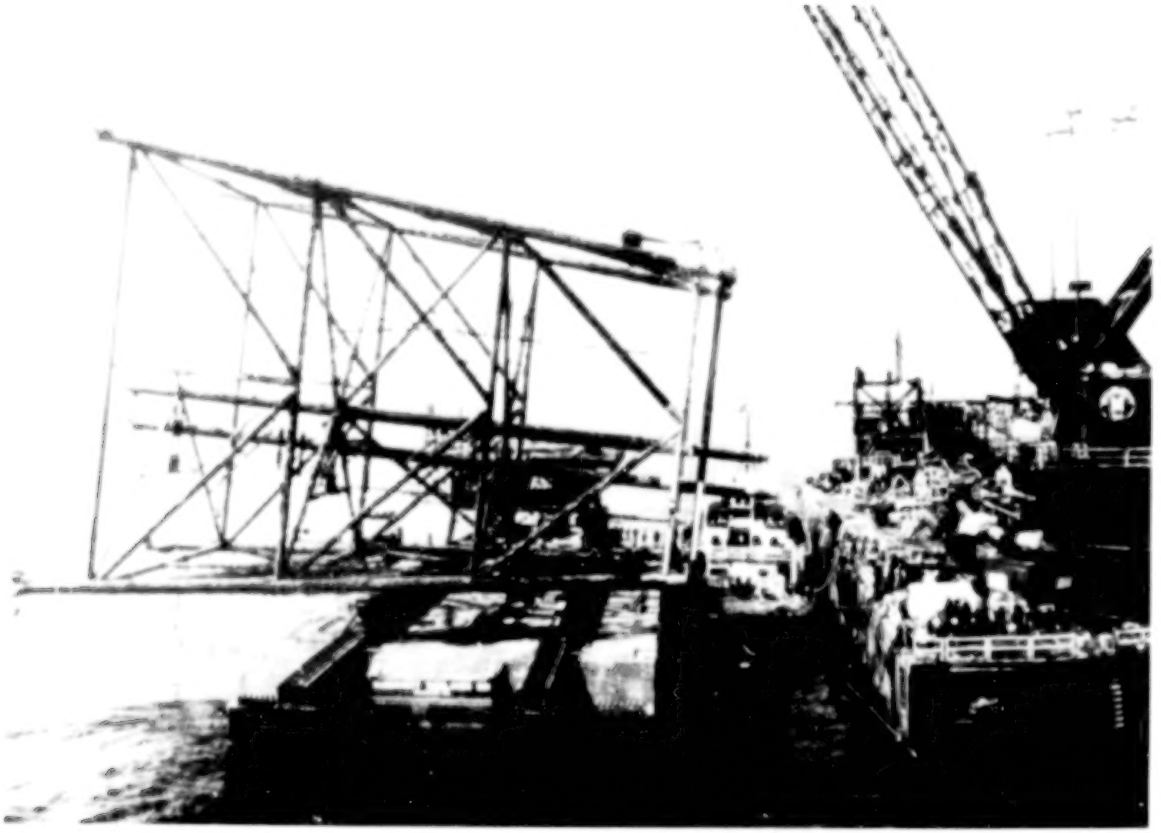

Figure 8. Backloading Jacket on Cargo Barge.

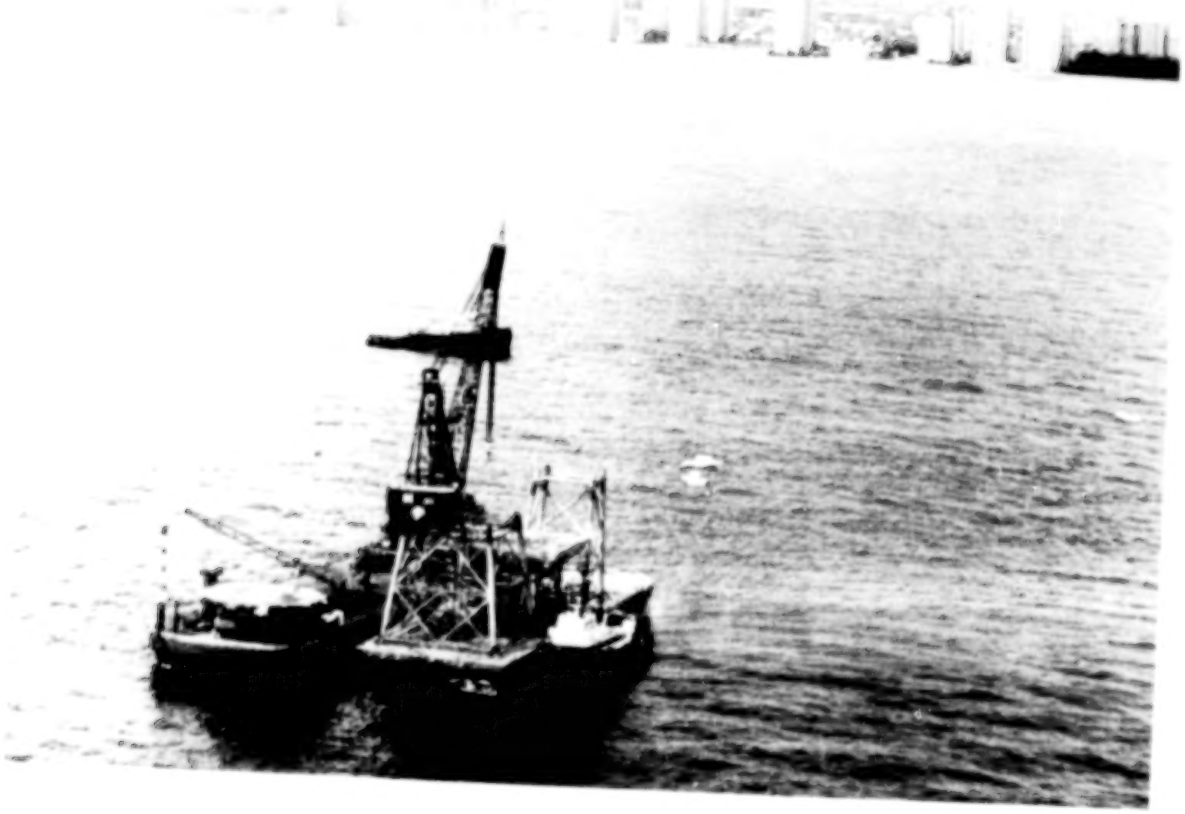

Figure 9. Reef Construction Site.

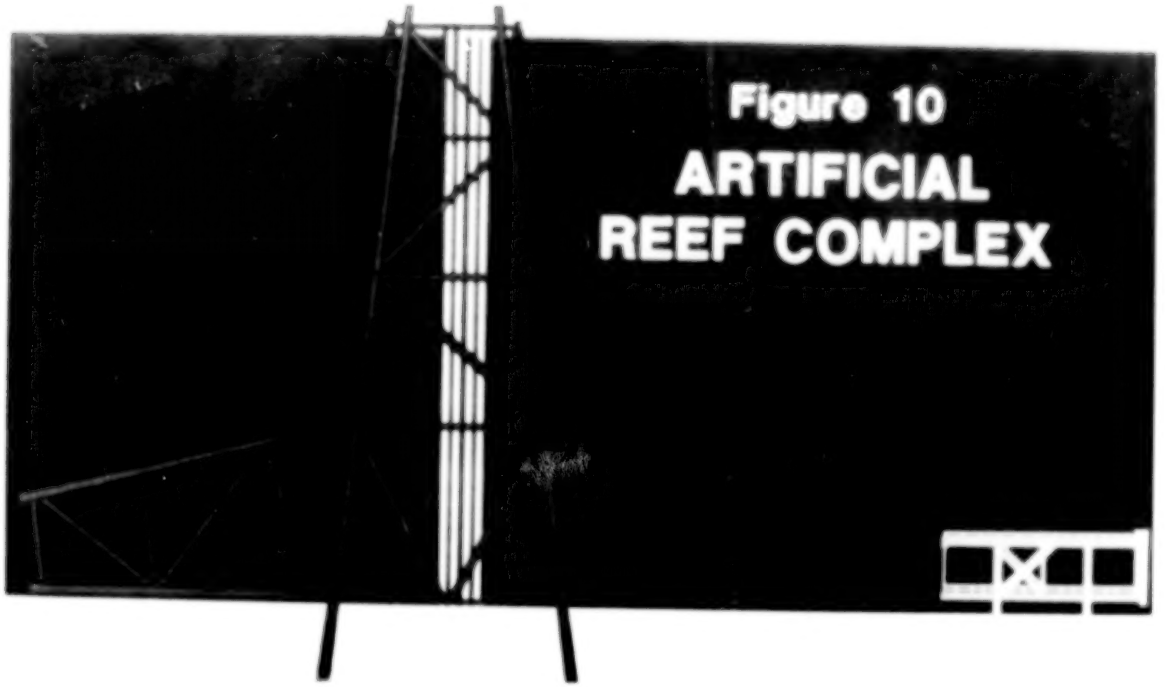
Figure 10
ARTIFICIAL
REEF COMPLEX

Table 1

Water Depth of Structures Installed in the Gulf of Mexico, off California, and off Alaska as of 1983

Water Depth (feet)	Number of Structures			
	Gulf of Mexico	California	Alaska	Total
0-20	1,152			1,152
21-50	1,414			1,414
51-100	650	7	14	671
101-150	329			329
151-200	240	10		250
201-300	206			206
301-400	52	6		58
401-500	5			5
501-900	4			4
900	4			4
Total	4,056	24	14	4,094

[a]Depth categories for California data are < 100 feet, 100 feet - 200 feet, 200 feet - 400 feet, > 400 feet.

[b]All Cook Inlet, Alaska, platforms are in water approximately 100 feet deep.

Source: National Research Council Marine Board. 1985. Disposal of Offshore Platforms.

Platform Removal: Reuse, Reef, or Scrap?

Mr. John A. Gilmore
Mr. R. R. Canady
Amoco Production Company

Introduction

The nominal design basis for oil and gas drilling and producing structures for the Gulf of Mexico is 20 years. By no means does a "20-year life" indicate that the structure is inadequate after 20 years. Indeed, the design life is more of a tool of definition to aid in the optimization of designs than a boundary condition for ultimate useful life.

There are currently in excess of 4,000 structures in the Gulf of Mexico associated with various aspects of oil and gas production. The structural types vary from single, oversized well caissons at one end of the spectrum to multiple-legged platforms designed to support simultaneously a large number of wells, a workover or drilling rig, and the production equipment necessary to process fluids from those wells into oil and gas sales pipelines.

The range of water depths in which these activities take place varies from just a few feet to over 1,000 ft (304.8 m). The design, size, and weight of required steel varies, dependent not only on the array of functions that will occur and on site-specific environmental conditions, but also with the individual preferences and opinions of the operating companies involved.

Although definitions, opinions, and designs may vary somewhat between our companies, the ultimate reason for the initial and continued existence of a given structure is the economical production and sale of hydrocarbons. When the time arrives that the costs of maintenance, operating personnel, transportation, fuels and other items outstrip the available income, a structure has reached the point of existing as a liability instead of an asset.

While this paper will address only the economic details of one project, there are also decisions dealing with environmental, social, and legal issues. Each of these areas must be reviewed and conditions that change with time must be considered in the overall planning of a platform abandonment.

Until very recently the existing State and/or Federal requirements concerning such structures called for complete removal to a depth of 16.4 ft (5 m) below the natural surrounding seabed. The options that were available following this required removal gave rise to the title of this paper: "Reuse, Reef or Scrap." The authors will use a site-specific example from Amoco Production Company that, due to some specific factors, allows a review of some of the various points that impact the decisionmaking process leading to one or more of these ends.

A Review of the Options

With the reasonably obvious exception of single-well caisson type structures for which the abandonment of the well itself virtually mandates total structural removal, the issue of removal must address two basic parts of the platform.

Most of the above-water portion of a platform consists of what is known as the deck. Decks vary from minimum structural accommodation to protect and service wellheads to those of larger areas, which are designed to support wells, drilling rigs, production equipment, personnel living quarters or some combination thereof. Historically, it has been our company's practice to remove deck

portions together with any associated facilities for transportation to a shore-based location. The available options downstream of this decision include either complete or partial reuse of deck, facilities, or both. These options are considered preferable to partial offshore dismantling (e.g., equipment removal) followed by cleanup, to render the remaining portion suitable for placement as reef substrate. The availability of used structural components and equipment can have considerable impact on the economical considerations of new petroleum production projects, as presented in the following case.

The available options that exist for the structure that remains after deck removal have altered slightly with recent reef site determinations, particularly those associated with Louisiana's Artificial Reef Program. Structures that exist within a designated reef platform area must certainly add some method of inplace/onsite disposal to the overall economic analysis. A paper by others at this conference will address the special considerations that this additional option demands.

The site-specific example that became the basis for this paper began with normal plans for platform decomissioning and removal from a former oil and gas production site offshore southwest Louisiana. A new option for reuse of the structures presented itself when Louisiana established an artificial-reef planning area several miles from our lease site. It should be noted that this paper does not address specifics associated with negotiations among the co-owners of the lease site regarding ultimate disposition of the structure. Such negotiations will be a critical step in converting rigs to reefs from many of the oil and gas leases in the Gulf of Mexico.

Project Overview

During 1974, exploratory drilling on West Cameron Block 513 (figure 1) confirmed seismic data on which earlier bid development assumptions had been based. The result of this drilling, as far as the platform structural considerations are concerned, was a decision by the company to develop the prospect using a platform concept known as the T.A.M.P.A. (Tender Assisted Minimum Platform Arrangement) (figure 2). Basically, the concept uses two 4-pile platforms that are bridge-connected to facilitate safety and ease of operations during both drilling and production phases of the field development.

Both structures were installed complete with decks during 1975. The combined weight of both jackets (subsea support structure) together with piling, decks, bridge, and equipment was approximately 3,000 short tons (2,722 metric tons). From the point of view of this paper, the only activities of significance during the life of the platforms at West Cameron 513 were annual verification of the corrosion protection system and, unfortunately, a minor ship collision with one of the two structures.

The company's preferred system for corrosion protection in the Gulf of Mexico is the use of sacrificial anodes. This system consists of numerous anodes of approximately 450 lb (204.1 kg) welded to the underwater jacket members. Original designs call for 10 years of protection for the structural steel by controlled dissolution of the anode material. This protection can be monitored and verified by measurement of the electrical potential of the platform relative to the surrounding seawater. For the years these two platforms were in service at West Cameron 513, the surveys indicated good corrosion protection.

In 1980 a vessel from the ship channel that transits Block 513 collided with the production structure. Neither the ship nor the structure sustained catastrophic damage; however, the platform jacket was affected enough to preclude later relocation and reuse considerations for reasons that shall be detailed later.

(Note: To avoid possible misunderstanding, it should be pointed out that, following the incident with the ship, the platform was inspected and sufficient analysis was done to satisfy Amoco and the appropriate Federal agencies that the jacket was more than adequate for its continued use at West Cameron 513 "B" location. The concern that led to the decision not to reuse it was over the increased stresses associated with removal, etc., to which the jacket would not be subjected during normal use.)

By late 1984 the volumes of gas and condensate being recovered from the reservoirs at West Cameron 513 were insufficient to warrant the continued operation of the platforms. Further, once the platforms were off production the company was bound by existing lease agreements with the Federal Government to remove the structures to a depth of 16 ft (5 m) below the sea floor. Because of the relatively short use that these structures had received and because of a company practice to investigate reuse possibilities, the West Cameron "B" T.A.M.P.A. pair became candidates for close scrutiny in regard to future utility.

The components of the T.A.M.P.A. arrangement that were available were the drilling jacket and associated deck; the production jacket with deck and facilities designed to handle daily throughput of 50 MMcfd; the bridge, which connected the two platforms; and the steel piling, which had been driven through the two jackets and into the sea floor. An evaluation of each component was required to determine not only the economic but engineering feasibility of salvage and reuse.

Project Details and Analysis

The first of the platform components from West Cameron 513 "B" reviewed for future utility were the easiest for which a decision could be made. As stated earlier, the existing company philosophy regarding decks and facilities made determining the reuse of the two decks the correct choice, virtually without detailed consideration.

There was a recognized need for the drilling deck to be used in the additional development of an existing oil and gas field. Since none of the other owners had an immediate need for the deck, it was purchased from the joint account. The differential between that cost and that of a newly fabricated deck worked to enhance the economics of the extended field development at the new location.

Although at the time there was not a known immediate need for the production deck and its associated 50 MMcfd facility, all of the companies involved agreed that the ultimate reuse potential was obvious. Without determining a current value or a future owner, the decision was made to transport the deck to shore after removal from the jacket for temporary storage. At the time of this writing, that deck is being modified structurally and the gas-handling facilities are being refurbished in preparation for reinstallation on another development project. That project and associated economics will not be detailed here, but the approximate savings after purchase from other working interest owners and revamping costs are in excess of $1.0 million as compared to a new deck and facility.

The analysis of reuse potential for both of the decks may appear somewhat perfunctory. Indeed, once a current need that can be met by these used components is identified, the decision is obvious. The decks are the only portions of the structural arrangement as a whole that are this readily analyzed. Since they are above water and therefore easily inspected and maintained, their condition for reuse is more definable.

The remaining components would reply not so directly on philosophy as on engineering and economic feasibility for analysis of reuse potential. The engineering factors that were considered were water depth match, general structural condition and integrity, and soil and environmental conditions at the new site, compared with original design criteria. The details of these analyses will be discussed further.

The economics associated with the possible use of the jacket, even if it were suitable technically, are highly dependent on a number of factors. Anticipated fabrication and offshore installation costs for 1986 were to be low enough to make careful comparison necessary. Estimates of the costs for a newly fabricated jacket were made and compared with anticipated costs for moving the existing jacket. The differential of $500,000 was determined to be enough to warrant taking the necessary risks associated with a salvage and reinstallation project.

The engineering feasibility portion of the analysis for the production jacket was, for reason of a ship collision mentioned earlier, more or less simplified. The call, made by Amoco's technical experts, was that the level of uncertainty associated with the damaged jacket would require an unacceptable amount of inspection work to determine the inplace condition. Even with that basic information, a similarly economically unattractive degree of detailed engineering analysis would be needed to determine whether or not the jacket would withstand the stresses of removal, transportation, and reinstallation. It was agreed that, by the time the engineering had been carried out and some probable modifications done to allow reuse, any savings from using the structure would likely have been eliminated.

The balance of the decision process for this jacket was one of economics. Due to the provisions of Rigs-to-Reef legislation that had been developed at the time, there was no option to leave the platform at the original location. Further, had there been available an option such as inplace toppling, it is unlikely that this jacket would have received approval because of its proximity to shipping lanes.

Once the jacket was disconnected from the seabed, only two real options were available. One was transportation to a shore location, followed by offloading and disposal as scrap. The alternative was transportation to an artificial reef site and offloading/placement as reef substrate material. Unfortunately for the reef development option, the nearest site for which we anticipated obtaining a permit was too far away to be economical. The cost of taking the jacket to shore for scrap was $162,000, compared to the $279,000 to transport it to the available reef site. The additional cost included, of necessity, some method of offloading the jacket at the reef location. The selected method for cost comparison was use of a derrick barge such as was required to place the jacket on a barge for transport. Other options were reviewed but were more expensive.

All additional costs to go ahead with the reef option would had to have been borne by Amoco and partners. The economics for that type of operation are considered in terms of

least cost liabilities as opposed to return on investment or payout. Consequently, a significant difference between the costs of the alternatives usually results in selection based on lowest numbers.

The remaining significant component evaluated during this project was the jacket portion of the drilling platform. The water depth at the West Cameron 513 location was 173 ft (52.7 m) and at the new location 183 ft (55.8 m). The structural modifications required to accommodate this difference consisted of removing and lowering the boat landing and barge bumpers. The costs associated with this work were detailed and used in the reuse analysis.

Divers were employed to verify the basic structural integrity of the jacket. This work did not consist of detailed cleaning off of marine growth followed by nondestructive weld inspection. Since there had not been any specific incidental damage such as caused by vessel collision, this effort could take the form of visual inspection. The divers confirmed that the structure was basically in the original, installed configuration. This inspection, coupled with the historical data discussed earlier indicating adequate cathodic protection during the time at West Cameron 513, served as adequate evidence that the drilling jacket was basically sound.

The next step in the determination of reusability dealt with analysis of conditions that would affect the structure's ability to exist for the required amount of time at a new location. Environmental data for wind, waves, and currents associated with both normal and worst-case storm conditions were calculated. These were combined with data from a geotechnical investigation to determine not only the forces that the jacket would have to withstand, but also the optimum design of both wall thickness and seafloor penetration for the piling, which would be driven through the jacket, to allow those forces to be endured.

In addition to the inplace analysis that was performed, there were certain considerations associated with the removal, transportation, and reinstallation activities for which forces had to be calculated. There is a significant sequential or domino effect caused by assumptions made in these areas. Both company and outside consultant experts were concerned that the stresses associated with rotating the jacket to a horizontal position and placing it on a cargo barge for transportation prior to reinstallation could be detrimental. Rather than go through the iterative analysis that would be required to determine if the structure could be handled in that manner without modification, a decision was made to limit removal and transportation to handling the jacket only in the vertical position. This decision was limiting in itself in that the height of the jacket (approx. 195 ft [59 m]), combined with its approximate weight of 600 short tons (544 metric tons), would allow only certain vessel/crane combinations to perform the work.

In order to be able to set the jacket on the seafloor at the new location during the reinstallation sequence, the designers had to account for mud line conditions. Experience in the new site area, coupled with the soil boring results, concluded that mud mats, or large horizontal areas at the bottom of the jacket, would have to be able to support the structure on the soft bottom. The design to replace the original mud mats had to take into account a method for reinstalling the structure offshore. After input from various sources, a decision was made to prefabricate the new mud mats and have them on the deck of the derrick barge. Once the jacket was on the crane's hook, and minor preparation was done to the bottom of the jacket legs, the

jacket could be set onto the mud mat assembly and the modifications completed while the barge was underway to the new location.

The remaining portion of the platforms that has not been discussed is the piling. For planning purposes regarding reinstallation of the salvaged jacket, it was determined that offshore modification/refurbishment of the piling material would be uneconomical. Appropriate design and fabrication work were carried out, and new piling was installed at the new site.

The removal of the piling from the drilling jacket was accomplished with no significant problem. Three of the four production platform piles easily came free of that jacket also. The final pile would not pull out of the jacket and was left in the jacket leg for transportation to the scrapping location.

The condition of the salvaged piling was such that the material was stored for future use. As of this writing some of the material has been reused in the further development of a field in offshore Texas.

Summary

This particular project, due to the platform arrangement and specifics for each jacket, allowed a review of mainly the economic aspects of options available in salvage situations, with the exception of abandonment inplace. Decisions must be made regarding each of the various components, and each decision must include both technical and economic considerations. The combination of technical feasibility and economic attractiveness must work together to allow reuse of components.

Unfortunately, for this particular case, the cost of logistics associated with the reef option was too high to make that choice economically viable. The establishment of multiple areas in the Gulf of Mexico as artificial reef sites will work to enhance the attractiveness of that option for future projects involving components determined not to have reuse potential.

Many issues that impact the decommissioning phase of petroleum activities in the Gulf of Mexico are interrelated. Changes such as Rigs-to-Reefs options and an increased understanding of the environmental and legal considerations serve to enhance the economics of abandonment and should allow continued development of platform-related artificial reefs.

Mr. John Gilmore is a graduate of Florida Atlantic University with a B.S.O.E. He was reared in a military family and has been in the oil business for the past 14 years and, as a result, is somewhat of a gypsy. Since joining Amoco in 1973, he has lived in Louisiana twice, in Chicago, Cairo, and London, and now in Houston. Most of his career has been involved in project engineering or management of offshore structures, equipment, and pipelines, and several onshore oil and gas related projects. He is involved with two projects for the Gulf of Mexico, one with all-new structural components and one that will use a deck that was salvaged during the operation about which this paper was written.

General Location Map – West Cameron Block 513

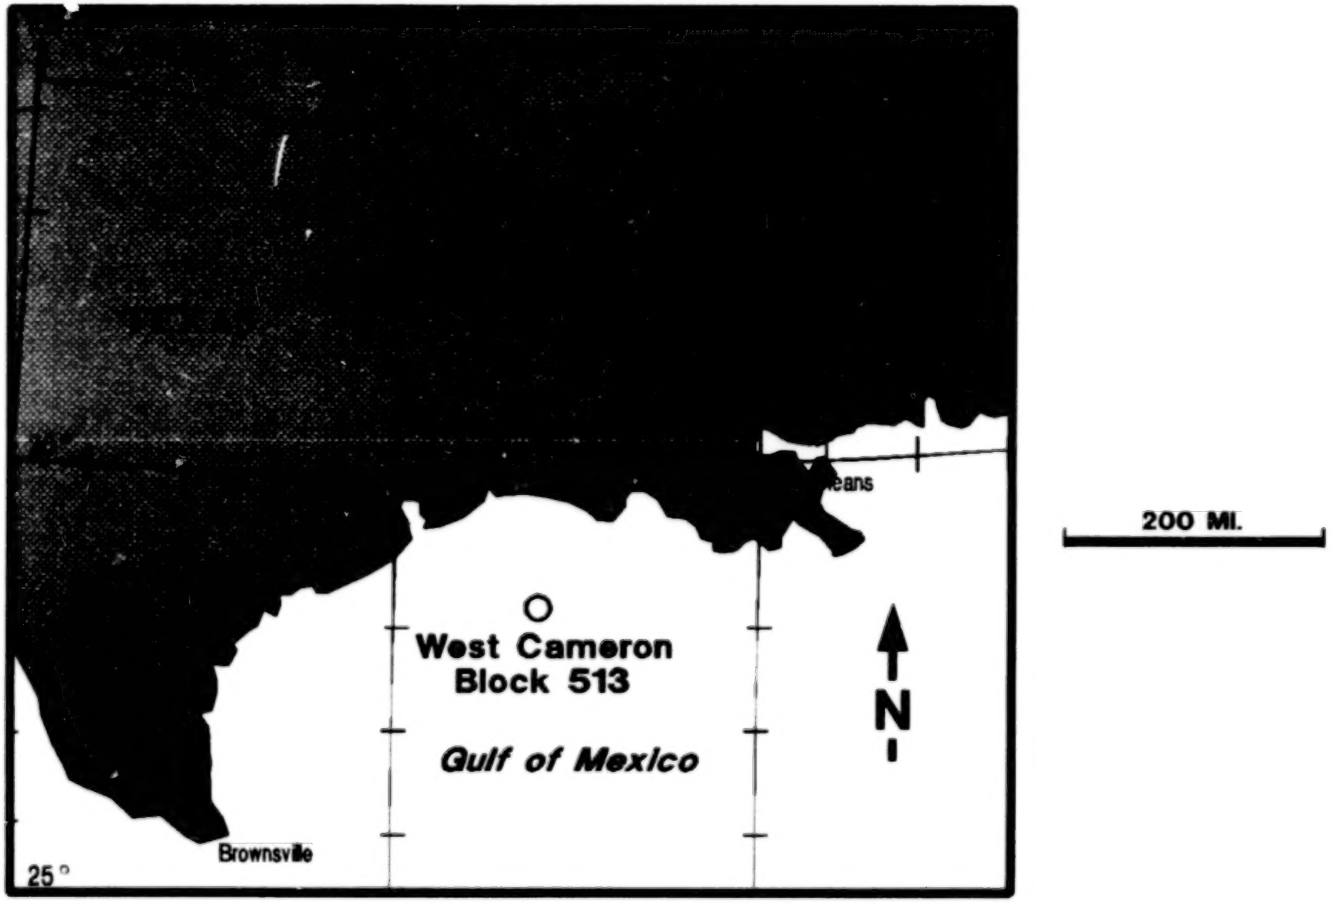

FIGURE 1.

AS SUBMITTED BY AUTHOR

Figure 2

T.A.M.P.A.

(Tender Assisted Minimum Platform Arrangement)

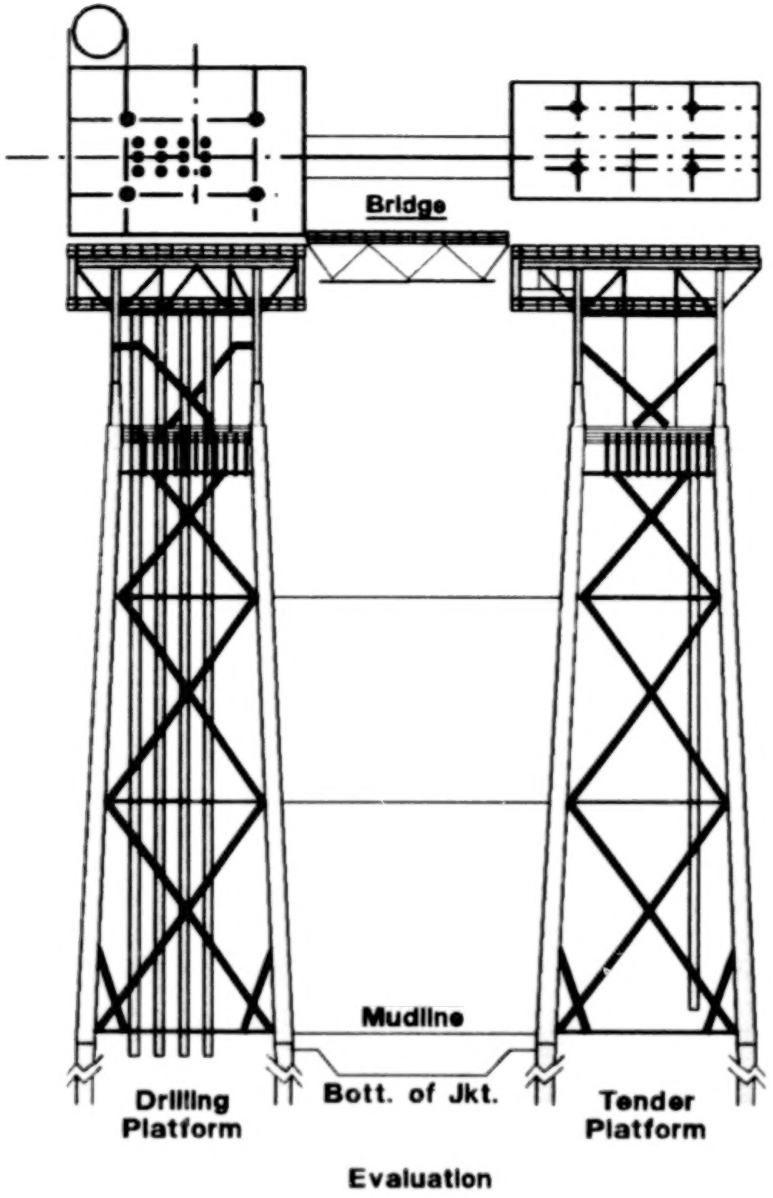

Evaluation

AS SUBMITTED BY AUTHOR

Rigs-to-Reefs–A Case History

Mr. James C. Quigel
Mr. Win L. Thornton
OXY USA Inc.
Houston, Texas

Abstract

The conversion of abandoned offshore platforms into artificial reefs has been done previously with little cost savings and often at considerable added expense to the lessees for transportation to an approved reef site. Efforts to obtain these structures for artificial reefs have predominantly been made by the State of Florida while the majority of offshore platforms are located in the Gulf of Mexico off the Louisiana and Texas coasts. Furthermore, shallow water structures in less than 100 ft (30.5 m) of water are often the earliest structures installed and the first to deplete their hydrocarbon resources, necessitating their removal. The cost for shallow water removals is generally less than that in deep water and it has been cheaper to haul them to shore for scrap rather than cut them up and transport the materials to a permitted reef site.

Recent efforts by Louisiana have brought reef areas closer to deep-water platforms, thus reducing much of the added logistical expense in reef construction. This paper describes the engineering planning, permitting, and actual field work performed to convert a production platform 90 miles (145 km) offshore Louisiana into an artificial reef under the Louisiana Artificial Reef Program. The project involved variances from regulatory requirements and normal structure removal procedures resulting in cost savings to the lessees and income to the Louisiana Artificial Reef Program, basic necessities for a self-sustaining extensive effort to utilize offshore structures for artificial reefs.

Summary

Research has shown that offshore petroleum production platforms serve as prime artificial reef habitats for marine organisms and are popular target fishing areas (Gallaway and Lewbel, 1982). In the Gulf of Mexico, the thousands of offshore structures provide a significant portion of the hard substrate in a naturally soft-bottomed environment (Gallaway, 1984). Regulatory requirements mandate the removal of obsolete hydrocarbon production structures. Unfortunately for marine habitat, it has been the standard practice to remove these structures and haul them ashore.

Several isolated abandonments in recent years have involved moving portions of offshore structures to reef sites off Florida and Alabama. These cases were at best "break-even" economic alternatives to traditional scrapping, and sometimes added considerable costs over normal structure removal. Understandably, this type of structure removal and disposition does not provide the economic incentives or tax benefits for creating reefs.

In October 1987, the Louisiana Artificial Reef Program (LARP) became operational when the first production platform was donated by OXY USA Inc. (OXY), known then as Cities Service Oil and Gas Corporation. Since the structure was located within one of the program's eight designated reef areas, it was possible to "topple" the jacket and conductors in place. The resulting cost savings over a traditional salvage were shared with the Louisiana Artificial Reef Program.

Background

The South Marsh Island Block 146 Platform was an 8-pile drilling and production platform designed with 18 well slots, a standard packaged API drilling rig and production equipment for 60 million standard cubic feet daily gas (MMcfd) production (figure 1). The platform was installed in 1977 and supported 9 conductors; it was located approximately 90 mi (145 km) southwest of Morgan City, Louisiana, in 237.6 ft (72 m) of water.

The concept of Rigs-to-Reefs is not new. For many years, fishermen and divers have congregated around Gulf of Mexico offshore structures where they found better fishing and diving (Ditton and Auyong, 1984). The structures have been taken for granted in Louisiana and Texas where there are several thousand inplace. Florida recognized the excellent reef potential afforded by these structures and made known its desire to obtain obsolete structures to add to its extensive artificial reef program (Barrett, 1984). An Exxon subsea production template (1980) and Tenneco structures (1982, 1985) were towed to locations off of Florida, and a Marathon structure (1983) was moved to a site offshore Alabama (Reggio, 1987). All of these efforts required costly towing to distant sites where reef programs were in effect. Generally, these projects were driven by goodwill or as a demonstration for tax incentive legislation. Economic factors would have suggested the structures should be hauled ashore for scrap.

In 1984, the National Fishing Enhancement Act (Title II of P.L. 98-623) was passed, designed to ensure the responsible and effective construction of artificial reefs in the United States waters. The Act specified national standards, provided for a National Artificial Reef Plan (U.S. Dept. of Commerce, NMFS, 1985) and addresses the liability of a reef permittee and reef material donors.

Shortly afterwards, the Louisiana Artificial Reef Initiative (LARI) was commenced to respond to concerns that the State's "reef" system of petroleum structures would be disappearing at an alarming rate. Legislation for the Louisiana Artificial Reef Development Program (Act 100) was passed in June 1986, and the site selection process for the first eight reef planning areas was finalized approximately one year later (Wilson, Van Sickle, and Pope, 1987).

Initial reef areas established under the LARI program were located in water depths greater than 150 ft (45 m). Structures in these water depths offer a better likelihood of an operator realizing cost savings utilizing a reef option over onshore scrapping. It is also possible in these water depths to achieve sufficient navigational clearance with normal dismantling techniques and minimize navigational aids maintenance costs. Reefs in shallower water, while they may be more accessible to recreational fishermen, will generally be at a cost disadvantage when compared to hauling materials to shore for scrap. Suggested methods to offset this cost differential include (1) creating tax incentives (as provided in the National Artificial Reef Plan) in return for the value of the artificial reef material being donated, (2) paying for reef materials by the artificial reef program, and (3) developing a program in which an oil company allows cost savings for deep water salvage(s) to offset the increased costs for shallow water salvage(s).

When it became apparent that the structure on South Marsh Island 146 would be of no further use for petroleum production, efforts began with the State of Louisiana to have it included within one of the planned reef

areas. The proposed area survived the site selection process, and work began in satisfying legal and regulatory concerns. Innovative engineering alternatives would be developed to identify the most cost-effective methods of platform decommissioning.

Legal Considerations

A review of the Operating Agreement was made to ensure all activities were properly authorized. It was decided that a letter would be sent to joint-interest owners of the platform notifying them of plans for the reef creation. No concerns were voiced by the partners.

The next task of great importance to OXY was development of the deed of donation for the Louisiana Artificial Reef Program. Both the title transfer and the monetary donation would be made a part of the package. The structure's distance from shore and approximately 125 ft (38 m) of navigational clearance keep liability concerns at a minimum. However, as a model for future reef projects, the format for the deed of donation needed to adequately relieve donor companies from these uncertainties. This was accomplished to the satisfaction of both parties a couple of weeks prior to salvage operations.

Regulatory Considerations

The Louisiana Artificial Reef Program, within the Department of Wildlife and Fisheries, submitted a permit to the Corps of Engineers to establish the reef area around the South Marsh Island 146 "A" platform, which was located within one of the planned reef areas. The careful planning done in the Louisiana program produced no adverse public expressions during the comment period.

OXY had worked closely with the Minerals Management Service (MMS) in their Rigs-to-Reefs efforts over the past years. In order to provide for the on-site abandonment, the MMS requirements for site clearance in both the lease agreement and OCS Order Number 3 (U.S. Dept. of the Interior, Geological Survey, 1980) would have to be waived. A request for departure from these requirements was approved by the MMS Gulf of Mexico Region office contingent upon participating in the Louisiana program under a Corps of Engineers permit. While plans were to sever the piles 16 ft (5 m) below the mud line, the MMS on-site observers would be able to allow for a departure to a lesser depth should unforeseen difficulties be encountered during the salvage operations. Other MMS requirements concerning the plugging and abandonment of wells had been accomplished prior to the proposed operations.

The decision to utilize explosives was made at an early stage in planning. Explosives are the safest, most reliable, and cost effective method of severing the piles and conductors below the mudline. In 1986, concerns regarding the safety of five species of endangered or threatened sea turtles brought explosives use for platform removals under careful review. Although there was little knowledge regarding sea turtles and their association with offshore platforms, the MMS began requesting information from operators prior to platform removals. If explosives were to be used, the MMS determined that it "may affect" endangered species and initiated a consultation with the National Marine Fisheries Service (NMFS) based on Section 7 of the Endangered Species Act of 1973. The NMFS evaluated each situation and provided an Incidental Take Statement that protected an operator from penalties under the Endangered Species Act if they incidentally "took" a sea

turtle, provided conditions specified in the statement were followed.

Prior structure removals had included NMFS and MMS observers, and almost all had limited explosives operations to a period somewhat shorter than daylight hours. OXY voiced its objections to this and requested round-the-clock operations based on (1) the unlikelihood of turtles in 237.6 ft (72 m) water depth and this distance from shore; (2) the extremely high fixed costs associated with marine operations; (3) the high risk and cost of encountering weather standby time while being shut down waiting on daylight; and (4) the "ultimate" mitigation measures being taken through the creation of a permanent marine reef habitat. Discussions with the MMS and NMFS were productive and the Incidental Take Statement provided for 24-hour operations if no "resident" turtles were observed during a specified observation period prior to the detonations. The statement still required observations during daylight hours to locate and remove transient turtles.

Because of the lack of additional knowledge, observation is at present the only scientific way to determine the presence or absence of turtles at a platform. It is hoped that the "resident" turtle concept can be extended to other platform removals, allowing around-the-clock operations.

Observations and removal tactics for marine mammals (primarily dolphins) were to be included as mitigative measures. The Marine Mammal Protection Act of 1972 protects these animals. The Incidental Take Statement under the Endangered Species Act did not cover marine mammals; however, the NMFS personnel could authorize the use of "scare" charges to encourage the animals to leave. A "permit" under the Marine Mammal Protection Act to "take" animals would be a lengthy regulatory effort. Dolphins, however, are more easily located, and it was felt that they could be successfully moved away from the site if any were seen prior to detonating explosives.

Engineering Considerations

OXY's initial engineering activities evaluated the potential platform abandonment options to select the optimum method of exploring opportunities provided by the Louisiana Artificial Reef Program. Options available for constructing artificial reefs are as follows (Reggio, 1987):

1. Abandon structure in place
2. Partially remove structure
3. Topple structure on location
4. Removal and relocate structure

After the alternatives and current available technologies were considered, it was determined that the logical and most economical method of decommissioning the South Marsh Island 146 structure would be to topple it in place. The deck section and equipment would be removed for reuse and to allow access to the piles for setting charges.

Engineering analyses that needed to be done included the following:

1. Establish the magnitude of the pulling load necessary to topple the jacket.
2. Establish the structural capacity of the platform to ensure design capacities would not be exceeded by the pulling load.

3. Establish the foundation capacity of the mudline framing to determine its ability to withstand toppling stress.

4. Physically inspect the platform to verify its integrity relative to design capacities.

5. Establish a method to sever piles and conductors that would guarantee severance while minimizing the amounts of explosives to diminish effects on marine life.

6. Plan salvage sequence that can be performed with marine equipment currently available in the Gulf of Mexico.

Salvage Operations

In late September, a crew was placed on the platform to perform preparatory cleaning and dismantling work. This minimized costly derrick barge time during salvage operations. At the same time, a team of divers performed an underwater inspection of the jacket to verify its integrity. Due to the water depth and size of the jacket, the inspection took two days.

On October 25, 1987, the crane ship *Ocean Builder I* was positioned alongside the South Marsh Island 146 "A" structure. The 9 conductor strings were each severed 16.4 ft (5 m) below the mudline utilizing 30 lbs (13.6 kg) of Comp "B" explosives in a double detonated configuration. The charges were specifically engineered to minimize the amount of explosives required, but were sized sufficiently to ensure that the multiple pipe strings in each conductor were severed completely on the first attempt. Operations were carried on from the platform as each conductor was shot separately with an average 20-minute delay between firings. The impact of these charges was small enough to allow certain other work tasks to be performed concurrently with the severing of the conductors.

Next, the quarters building and production equipment skids were removed from the deck and placed on the cargo barge. The deck legs were than severed below the existing stabbing guides so the 1,250-short-ton (1,134-metric-ton) deck could be removed. After the deck had been removed and seafastened on the cargo barge, the barge and tug were sent to shore. OXY will reuse the production equipment and quarters. The deck has been sold to another company for reuse.

Previous literature has indicated that reuse was not an economic alternative. Present conditions such as low oil and natural gas prices, idle salvage yards, and the many small companies entering the offshore exploration and production business have made reuse a viable alternative to onshore scrapping or reef creation.

With the jacket protruding approximately 16.4 ft (5 m) above the water surface and the conductors another 39.4 ft (12 m) higher, the next task was to sever the structure's piles. The eight 48-inch (outer diameter) by 2-inch (121.9 cm by 5.08 cm) W. T. piles were each cut by utilizing 50 lbs (22.7 kg) of Comp "B" in a "configured" charge placed 16.4 ft (5 m) below the mudline. The charges were staggered to eliminate cumulative effects of the explosions on marine life. The piles were successfully severed, evidenced by the jacket sinking several feet.

Next, cap plates were welded on the piles and the water was blown out to minimize both the on-bottom weight and the corresponding pulling load necessary for toppling. Four derrick barge anchor cables were attached to

the jacket and the barge was positioned approximately 800 ft (244 m) from the jacket (figure 2). After pulling a constant 350 short tons (318 metric tons) on the anchor winches for about 60 minutes, the mud suction at the base of the platform broke, and the 3,500 short-ton (3,175 metric-ton) jacket, conductors, and piles (figure 3) toppled.

Results

The permanent high profile benthic reef created is quite impressive (figure 4). The South Marsh Island 146 reef has over 1.4 hectares (3.5 acres) of hard substrate surface, and it encloses over 3.3 million ft^3 (93,400 m^3) of volume. The mudline plan is more than 41,964 ft^2 (3,900 m^2), which is better than twice the footprint of the original configuration.

The reef is stable. It has a calculated safety factor of 10 against sliding due to forces from 100-year-design wave and current. The reef will also have a long life. Assuming a 15-year life remaining on the existing anodes and utilizing the average corrosion rate of steel immersed in saltwater, we can conservatively expect a life approaching three centuries.

Fish mortality due to the explosives was minimal. Approximately 75 fish floated to the surface. Red snapper (*Lutjanus campechanus*), vermilion snapper (*Rhomboplites aurorubens*), sand seatrout (*Cynoscion arenarius*), reef butterflyfish (*Chaetodon sedentarius*), and black grouper (*Mycteroperca microlepis*) accounted for over 40 percent of the species recovered. Divers also found a small number of fish on the bottom. A posttoppling dive and video survey conducted by the same dive team that had done the diving one month earlier indicated fish levels approaching those prior to salvage operations.

The Louisiana Artificial Reef Program shared in the cost savings realized by OXY. The monetary donation made by OXY to the program will be used to offset administrative, legal, buoying, and maintenance expenses associated with the reef site. This money and future monies collected by the program may also be used to subsidize costs of developing shallow water reefs where the construction and/or maintenance costs exceed normal salvage costs. Hopefully, monetary donations will enable the Louisiana Program to be a self-sustaining, "full service" reef program that combines the needs of nearshore recreational fishermen and offshore commercial fishermen and effectively utilizes these materials of opportunity from the oil and gas industry.

Acknowledgments

The authors would like to recognize the cooperation and support of OXY USA Inc. (formerly Cities Service Oil and Gas Corporation), the Minerals Management Service, and the National Marine Fisheries Service in the successful accomplishment of the project.

Also, the authors would like to acknowledge the individual contributions of Charles Wilson and Virginia Van Sickle, co-chairmen of the Louisiana Artificial Reef Program, and Villere Reggio of the Minerals Management Service for their tireless efforts in Rigs-to-Reefs efforts, and to Ron Twachtman and Jim Snyder, Twachtman-Snyder Inc, as project engineers.

References Cited

Barrett, J. 1984. Rigs-to-Reefs in the eastern Gulf: past accomplishments and future plans. In: Proceedings, fourth annual Gulf of Mexico Information Transfer Meeting. New Orleans, November 15-17, 1983. OCS Report/MMS 84-0026.

Metairie, La.: U.S. Department of the Interior, Minerals Management Service. Pp. 137-142.

Ditton, R. B. and J. Auyong. 1984. Fishing offshore platforms central Gulf of Mexico: an analysis of recreational and commercial fishing use at 164 major offshore petroleum structures. OCS Monograph/MMS 84-0006. Metairie, La.: U.S. Department of the Interior, Minerals Management Service.

Gallaway, B. J. and G. Lewbel. 1982. The ecology of petroleum platforms in the northwestern Gulf of Mexico: A community profile. Open File Report 82-03. FWS/OBS-82/27. Metairie, La.: U.S. Department of the Interior, Bureau of Land Management. Pp. 9-38.

Gallaway, B. J. 1984. Assessment of platform effects on snapper populations and fisheries. In: Proceedings, fifth annual Gulf of Mexico Information Transfer Meeting. New Orleans, November 27-29, 1984. OCS Study/MMS 85-0008. Metairie, La.: U.S. Department of the Interior, Minerals Management Service. Pp. 130-137.

Reggio, V. 1984. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Department of the Interior, Minerals Management Service.

U.S. Department of Commerce, National Marine Fisheries Service. 1985. National artificial reef plan. National Oceanic and Atmospheric Administration technical memorandum. National Marine Fisheries Service OF-6. Washington, D.C.

U.S. Department of the Interior, Geological Survey. 1980. Gulf of Mexico Outer Continental Shelf orders governing oil and gas operations. Reston, Va.

Wilson, C. A., V. Van Sickle, and D. Pope. 1987. The Louisiana artificial reef plan. Submitted to the Louisiana House and Senate Natural Resources Committees by the Louisiana Artificial Reef Council, 1987. Pp. 17-20.

Mr. Win L. Thornton holds a Bachelor of Civil Engineering (1975) from Georgia Tech and a M.S. in civil engineering (1981) from the University of Houston. Mr. Thornton is currrently lead mechanical engineer with the Houston District of Oxy USA Inc. His experience includes managing the design, construction, and installation of offshore platforms, pipelines, and facilities for the Gulf of Mexico. Current responsibilities cover all construction activities onshore Gulf Coast and offshore Gulf of Mexico.

Mr. James C. Quigel holds a B.S. (1974) from Wheaton (Illinois) College and a Master of Business Administration in marine resources management (1977) from Texas A&M University. Mr. Quigel is currently an environmental programs coordinator with Amoco in Houston. His current responsibilities include enviroamental issues concerning Amoco Production Company worldwide.

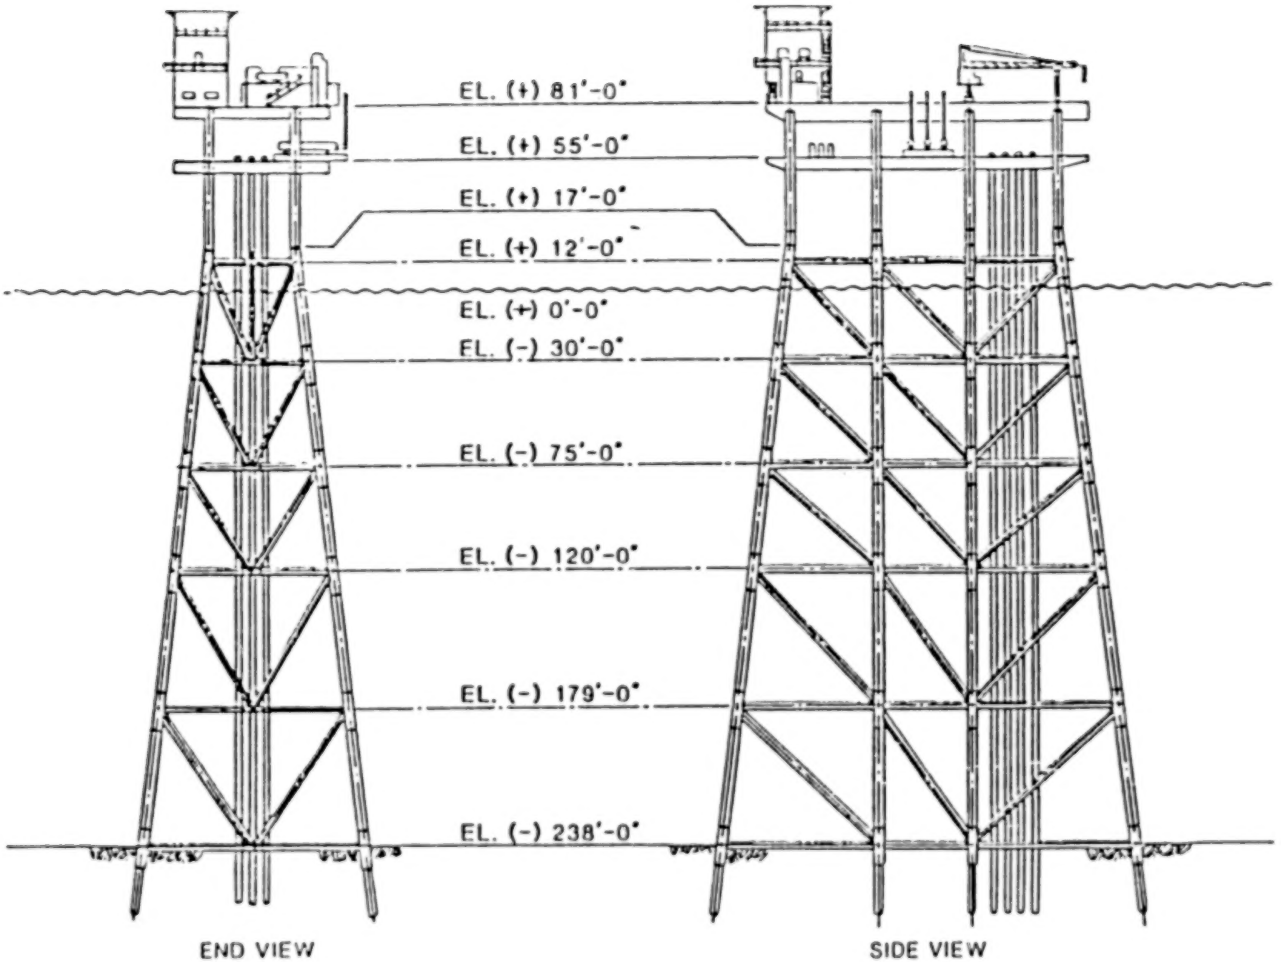

Fig. 1 - Platform Configuration

AS SUBMITTED BY AUTHOR

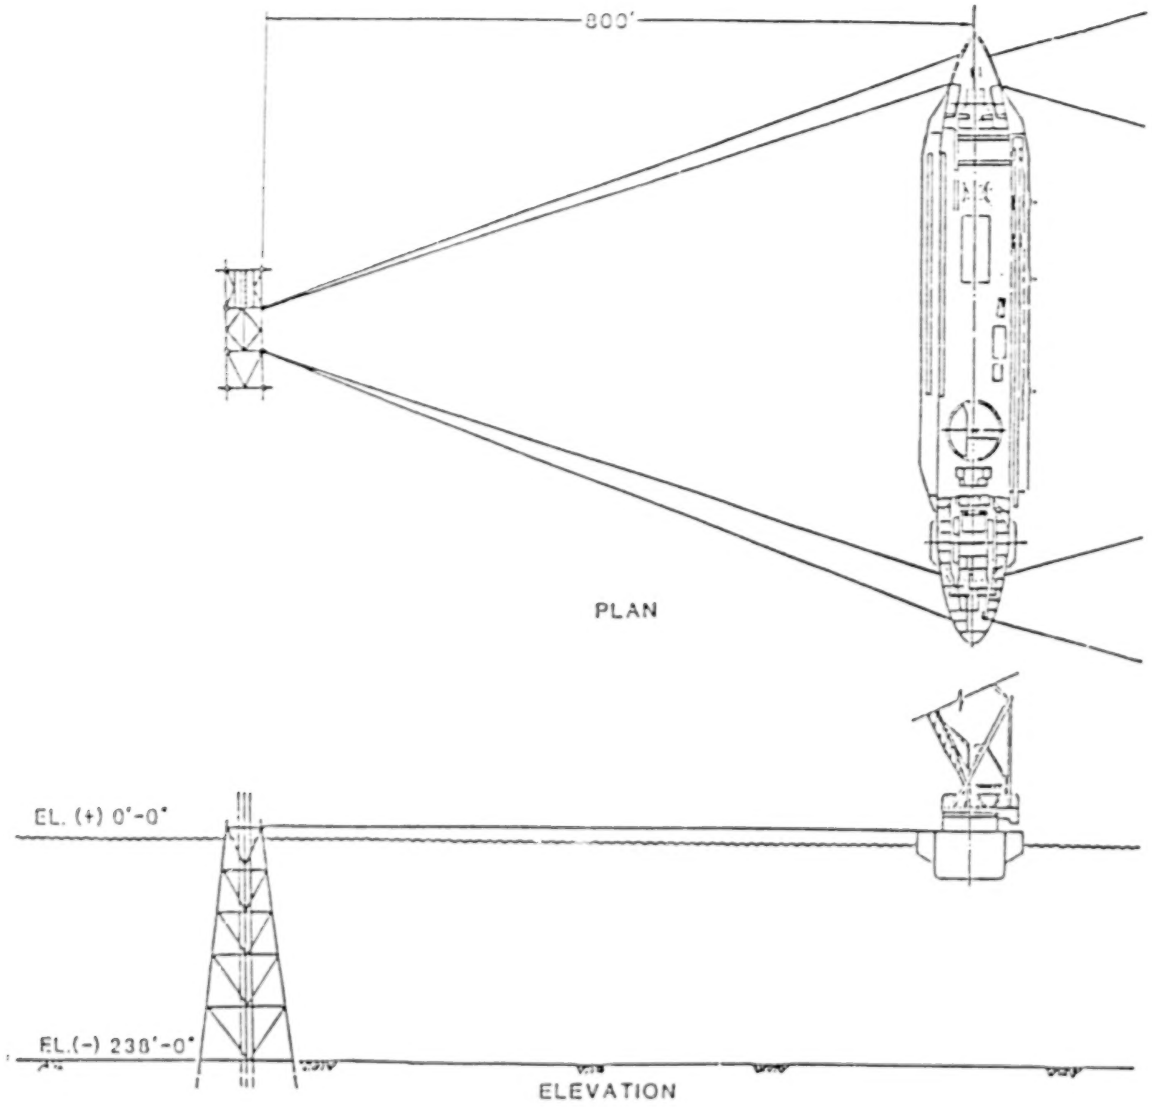

Fig. 2 - Rig up to jacket for toppling
AS SUBMITTED BY AUTHOR

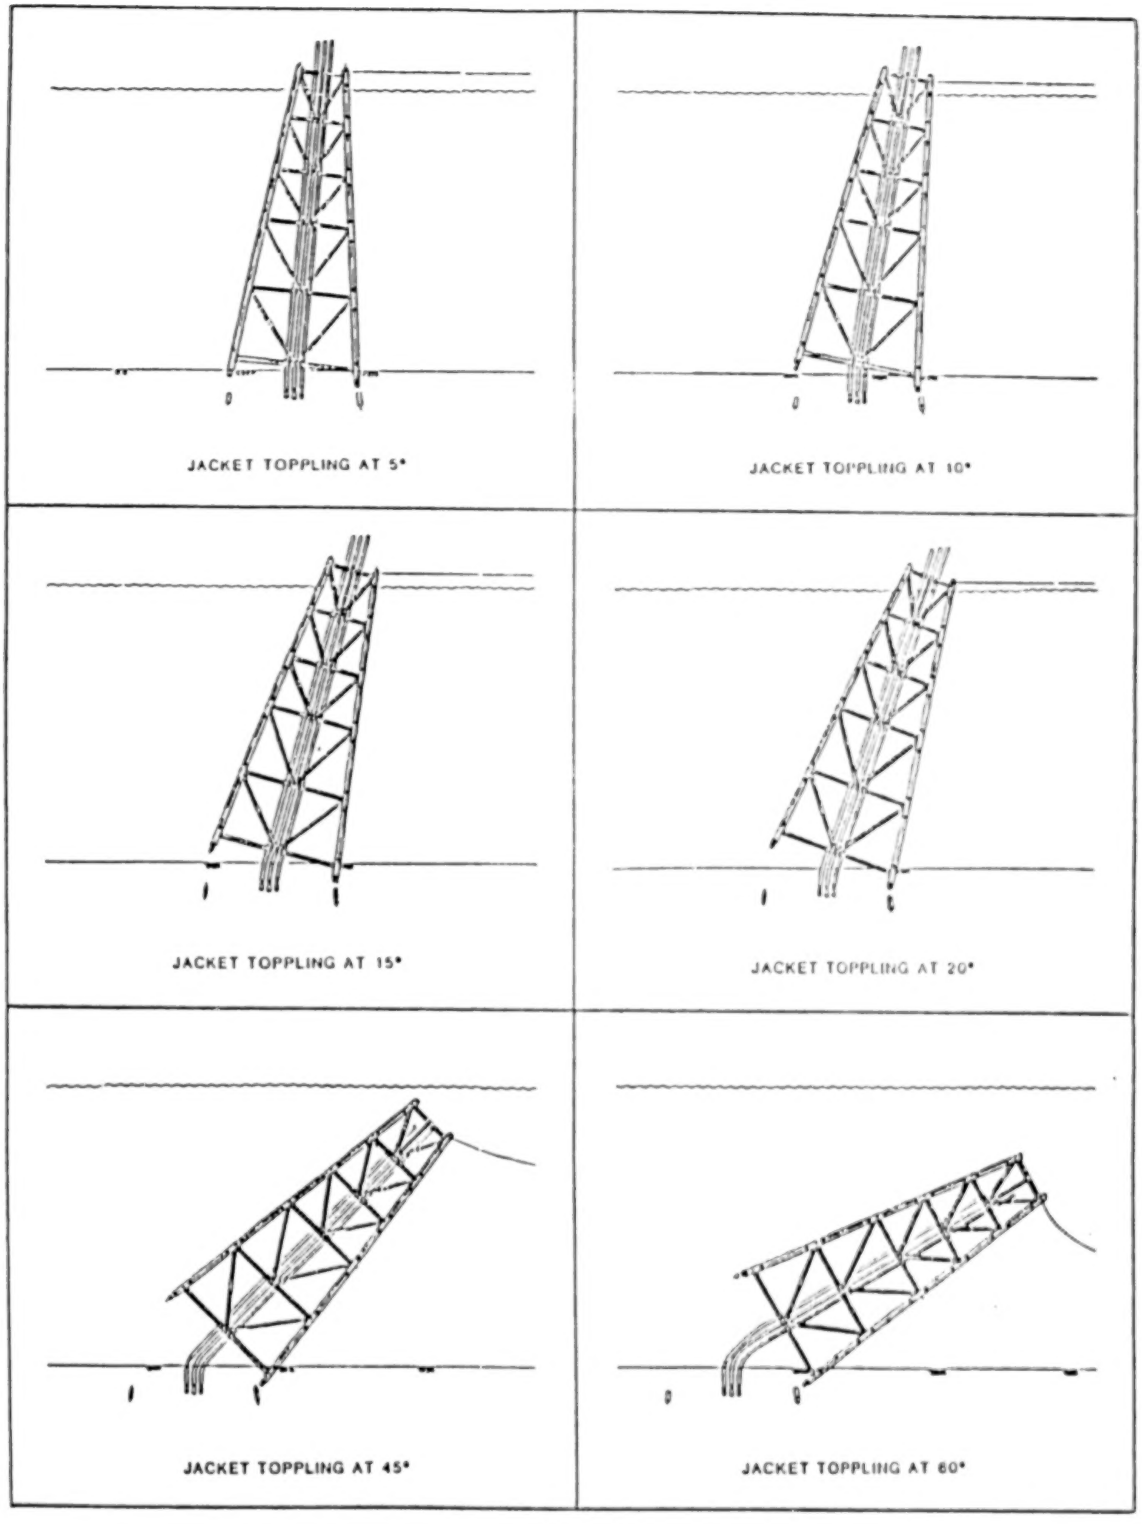

Fig. 3 - Jacket toppling sequence

AS SUBMITTED BY AUTHOR

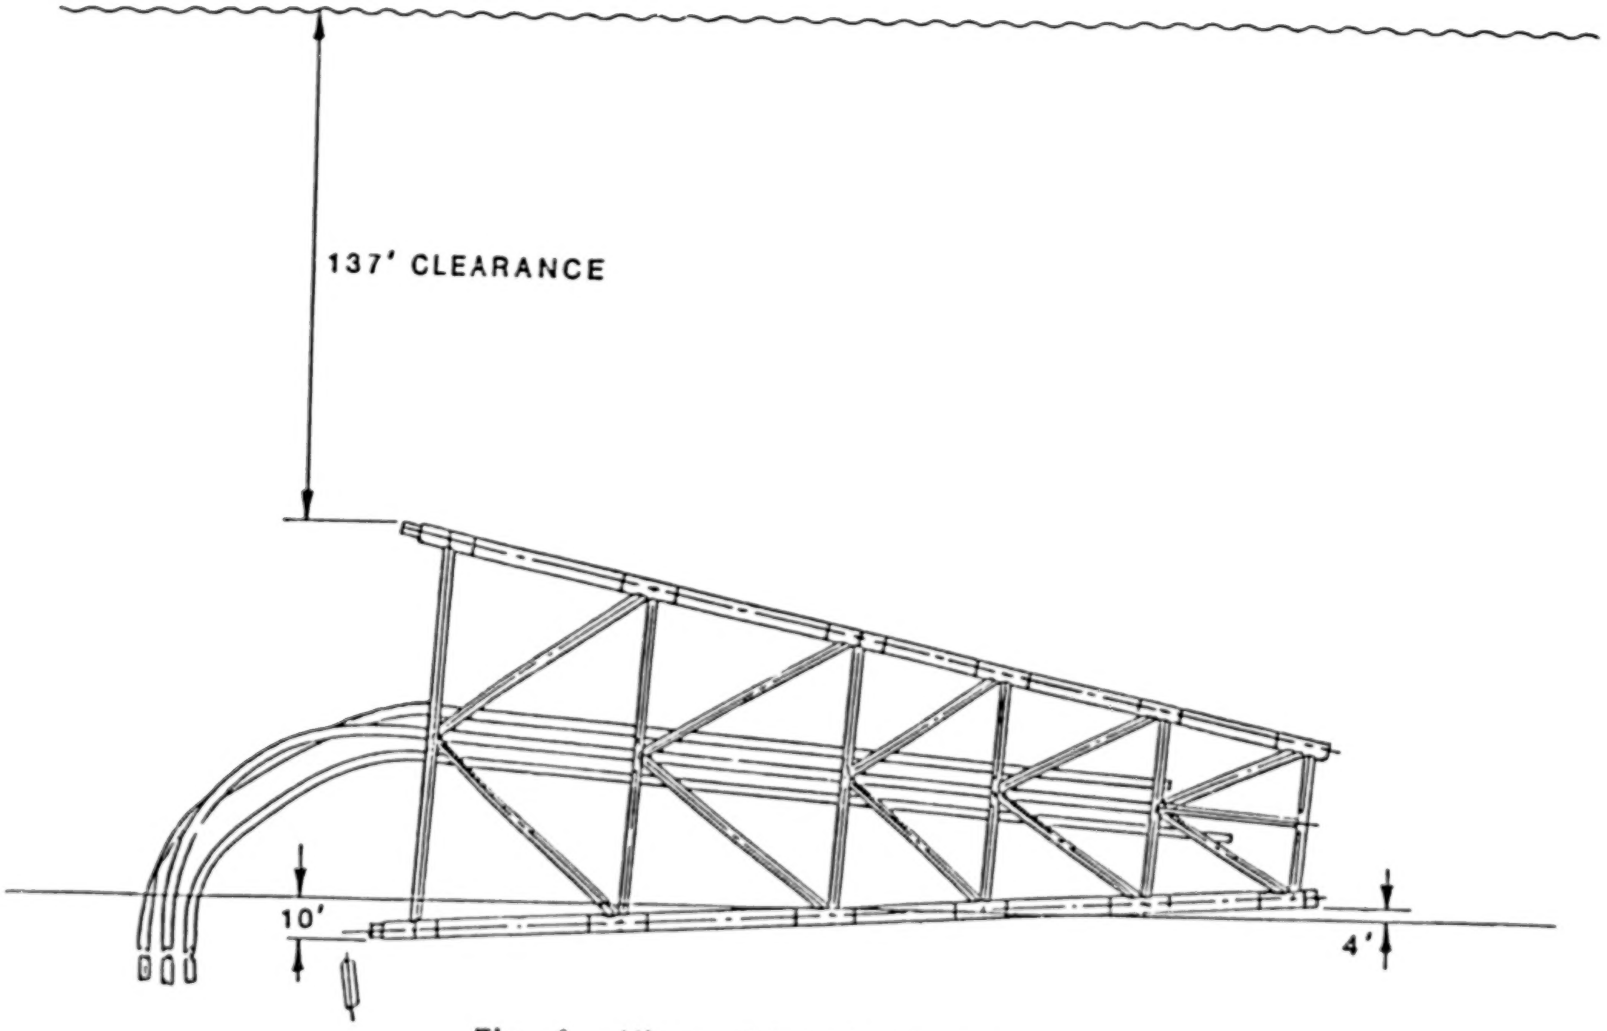

Fig. 4 - View of toppled jacket

AS SUBMITTED BY AUTHOR

BLANK PAGE

Impacts of the Explosive Removal of Offshore Petroleum Platforms on Turtles and Dolphins

Dr. Edward F. Klima
Mr. Gregg R. Gitschlag
Dr. Maurice L. Renaud
National Marine Fisheries Service
Galveston, Texas

Abstract

Strandings of 51 dead sea turtles (primarily *Lepidochelys kempi*), 40 dolphins (primarily *Tursiops truncatus*), and many fish were recorded on beaches in the northwestern Gulf of Mexico from March 19 to April 19, 1986. During this period explosives were used to remove several oil platforms in adjacent offshore waters. Drift bottles released at the site of one of the explosions were recovered with some of the strandings. Shrimp fishing activity, a known cause of turtle mortality, was at a normal seasonal low. Circumstantial evidence suggests that at least some of the strandings of marine animals may have been due to underwater explosions used in removal of oil platforms.

A total of 6 turtles was observed at 3 of 11 removal sites during March 1986 through September 1987, and a maximum of 26 dolphins was observed at each of 10 sites. One wild sea turtle was observed sinking after an explosion, but it could not be recovered to document its injuries. Necropsy of one stranded loggerhead turtle found two days after a 1987 removal showed hemorrhaging of the lungs, which is consistent with impacts of an explosion; this condition may also be attributed to postmortem decomposition of tissue. In a preliminary experiment, two of four Kemp's ridley and three of four loggerhead (*Caretta caretta*) turtles were rendered unconscious after placement within 3,002 ft (915 m) of the simultaneous explosion of four 50.7-lb (23-kg) charges.

Comparison of turtle strandings during periods characterized by high and low numbers of offshore explosions (March-April 1986 and March-April 1987, respectively) suggested a positive relationship between the frequency of explosions and the stranding of turtles. Although dolphins may be impacted by explosions, the relationship between the stranding of dolphins and offshore explosions was not as conspicuous.

Introduction

Between March 19 and April 19, 1986, 51 dead sea turtles, primarily the endangered Kemp's ridley (*Lepidochelys kempi*), were found on beaches of the upper Texas coast. Ten petroleum structures were removed from this area when shrimping activity, a factor contributing to turtle mortality (Henwood and Stuntz, 1987), was at a seasonal low (figure 1).

During the summer of 1986 the Minerals Management Service (MMS) and the National Marine Fisheries Service (NMFS) discussed the effects of offshore explosions on endangered and threatened sea turtles. They agreed to hold formal consultations, as provided under Section 7 of the Endangered Species Act of 1973, for each proposed use of explosives in Outer Continental Shelf (OCS) waters of the Gulf of Mexico. Beginning in 1987, companies planning to remove oil and gas structures (platforms, caissons, well conductors, flare stacks, etc.) with explosives were required to obtain a permit from MMS. Permits authorized the use of explosives, provided the company followed certain requirements, which generally included the following: (1) visual monitoring for turtles around the removal site by observers approved by NMFS and operating from the

work platform and frequently from helicopters, (2) pre- and postblast diver surveys for sea turtles, (3) delaying detonations to allow observed turtles to leave the area, (4) detonating only during daylight hours to facilitate visual monitoring, and (5) staggering detonations to reduce the maximum pressure generated by the explosions.

High-velocity explosives are typically used to sever pilings and conductors 16.4 ft (5 m) below the mudline during removal operations. A crane then lifts these structures out of the water to a barge for return to shore. It is important to assess the potential impacts of these activities on sea turtles and other marine life. The MMS estimates that there were 3,435 platforms in the Federal OCS as of December 1986 and predicts between 60 and 120 structures will be removed annually for the next five years. The National Research Council (1985) estimates approximately 1,700 structures will be scheduled for removal between 1984 and 2000. The Council predicts about 100 to 130 removals annually between 1990 and 2000.

This paper reports on (1) the relationship of explosive events with strandings of sea turtles and dolphins, (2) biological monitoring at 11 structure removal sites during April 1986 through September 1987, and (3) an experiment in which sea turtles were exposed to underwater explosions associated with the removal of a platform. Information pertaining to the association of turtles with offshore structures and the impacts of underwater explosions on turtles and dolphins is also discussed.

Materials and Methods

Sea Turtle Stranding Network

Since 1980, a sea turtle stranding network, operating primarily on a volunteer basis, has collected data from the U.S. Gulf of Mexico and Atlantic coasts. All information is centralized at the NMFS Miami Laboratory. The NMFS Sea Turtle Stranding Network has been documenting beach strandings of turtles along the Texas and western Louisiana coasts through routinely scheduled surveys since the spring of 1986. Prior to this, NMFS surveyed the beach only in response to strandings reported by the public. Organizations supporting this network include the University of Texas Marine Science Center, McNeese State University, Louisiana Department of Wildlife and Fisheries, and the U.S. Fish and Wildlife Service.

Both the area and frequency of coverage have increased tremendously since inception of the program. Nearly all U.S. beaches along the Gulf of Mexico west of the Mermentau River, Louisiana, are surveyed biweekly if accessible by pickup truck, motorcycle, or all-terrain vehicle. Some estuarine and remote island shorelines have been included in the survey area. To assess the effects of explosions more accurately, surveys along the coastline were generally intensified near inshore platform removal sites both immediately prior to and immediately following scheduled structure removal (figure 2).

Marine Mammal Stranding Network

The National Marine Mammal Stranding Network operates primarily on a volunteer basis and responds to calls from the public. Organizers in various states report strandings to a central office in Orlando, Florida. Data in this paper were supplied by the Texas Marine Mammal Stranding Network, College of Veterinary Medicine, Texas A&M University. Information gathered through the NMFS Sea Turtle Stranding Network has

assisted in the acquisition of data on marine mammal strandings.

NMFS Monitoring of Platform and Caisson Removals

Observers monitored the area around structure removal sites prior to, during, and after detonation of explosives (figure 3, table 1). Preblast monitoring for sea turtles was conducted from (1) work and/or materials barges, (2) the structure being removed, (3) tug boats or crew boats as available, and (4) helicopters, if required in the Section 7 consultation authorized by the Endangered Species Act. Observers used helicopters to survey around the removal site to a distance of 0.9 mi (1.5 km). Thirty-minute flights were made within 1 h prior to and immediately following the detonations. Detonations were delayed 1 h if sea turtles or marine mammals were observed within 3,002 ft (915 m) of the detonation site, and the survey was repeated, unless there was verification that the animals had moved beyond the 3,002-ft range. Oil company divers made preblast dives around the structures to document the presence of sea turtles, marine mammals, and fish.

In all but one case, explosives were detonated no earlier than 1 h after sunrise nor later than 1 h before sunset. Following the detonations, dead or injured marine life were sampled on the bottom by divers and on the surface by personnel operating from a vessel. Observers in helicopters assisted this effort by communicating their observations to personnel collecting the animals. Fish were measured and identified. Drift cards were released at the removal sites in an attempt to document surface currents and to assist in correlating the location of strandings with offshore explosions.

Exposure of Turtles to an Underwater Explosion

An experiment was designed to provide preliminary information on the extent of the impact zone created by the explosive removal of an offshore platform. Kemp's ridleys weighing 1.3, 2.9, 3.3, and 14.8 lb (0.6, 1.3, 1.5, and 6.7 kg) and loggerhead turtles weighing 8.8, 9.3, 12.1, and 15.0 lb (4.0, 4.2, 5.5, and 6.8 kg) were placed in plastic mesh, steel framed cages 3.0 ft by 3.0 ft by 3.9 ft (0.9 m by 0.9 m by 1.2 m), one turtle of each species at four distances--750; 1,200; 1,800; and 3,000 ft (229 m, 366 m, 549 m, and 915 m). Turtles were unrestrained and allowed to swim freely in the cages. All turtles had deformed flippers but were otherwise healthy, and all were permanent residents of the NMFS, Southeast Fisheries Center, Galveston Laboratory. The cages were submerged to a depth of 14.8 ft (4.5 m) over the 29.5-ft (9-m) deep sea bottom, just prior to the simultaneous explosion of four 50.7-lb (23-kg) charges of nitromethane placed inside the platform pilings at a depth of 16.4 ft (5 m) below the mudline. The energy level of the shock wave generated by the explosion was estimated by Cummings for each of the four distances. Immediately following the explosion, turtles were retrieved and inspected carefully for external damage. Seabed drifters and drift bottles were released to define prevailing currents that might carry injured or dead marine animals ashore. All animals were transferred to the NMFS Galveston Laboratory and examined daily for the next month. The experiments were undertaken with the permission of the U.S. Fish and Wildlife Service under Permit No. PRT-676379.

Shrimp Fleet Fishing Effort

Detailed catch statistics for the U.S. Gulf of Mexico shrimp fishery have been compiled

since 1956, and the procedures used to collect them are described by Klima (1980).

Results

Relationship of Explosive Events with Strandings of Marine Life

A series of at least 22 explosions occurred between March 19 and April 5, 1986, in conjunction with oil field structure removals within 4.4-6.8 mi (7-11 km) of the Bolivar Peninsula, near Galveston, Texas (table 2). During this period and the following two weeks, 51 dead turtles were found on beaches in Statistical Area 18, which includes Bolivar Peninsula and Galveston Island (figure 4). Of the 51 turtles stranded, 25 (49 percent) were reported within an 6.8-mi (11-km) radius and 44 (86 percent) within a 33.6-mi (54-km) radius of the structures that were removed. Forty-one dolphins (*Tursiops truncatus*), 15 of which were apparently smaller than the usual size at birth (i.e., fetuses ≤ 47.2 inches [120 cm] total length), also stranded (figure 4). After two detonations (370.4 lb [168 kg of explosive]) on April 5, sheepshead (*Archosargus probatocephalus*), black drum (*Pogonias cromis*) and a variety of other fish species were observed floating on the surface. Perforated air bladders were found in five sheepshead collected in bottom trawls after the detonations (Andre Landry, unpublished data). Fifty-four sheepshead and 69 black drum were stranded along 13.7 mi (22 km) of beach immediately inshore of the removal site over the next 14 days (figures 5 and 6).

Turtles. Beaches in Statistical Area 18 were surveyed for approximately 312 and 320 man-hours in 1986 and 1987, respectively. In 1985, however, NMFS personnel examined the beaches in this area only in response to public reports of stranded marine life. From March 19 to April 19, nine turtle strandings were reported in Statistical Area 18 during 1985, 51 in 1986, and only 4 during the same period in 1987. Based on the state of decomposition of a turtle and the reported date of stranding, one turtle from each of the 1985 and 1986 data sets had died previous to the March-April sampling period. At least 22 explosions were reported in Texas State waters of Area 18 during this period in 1986, and one explosion was reported in Federal waters in 1987. Comparison of turtle strandings during periods characterized by high and low numbers of offshore explosions (March-April 1986 and March-April 1987, respectively) suggested a positive relationship between the frequency of explosions and the stranding of turtles (figure 7). Strandings of turtles in western Louisiana (Statistical Area 17) were minimal for 1985 (3 turtles) and 1987 (30 turtles). However, in 1986, 122 stranded turtles were reported; 119 of the strandings occurred during May through September.

Two turtles that were stranded on beaches within two weeks after explosions at monitored platforms were autopsied. One loggerhead showed no characteristics consistent with explosive impacts. External inspection of another loggerhead found dead two days following a nearshore explosion revealed a bloated carcass with green flesh and gas bubbles beneath the scutes. Necropsy showed lung hemorrhage, four ruptures of the right atrium, and bloody fluid in the pericardial sac (Andre Landry, personal communication). Lung hemorrhage is consistent with impacts resulting from underwater explosions. However, this condition, along with ruptures in the heart, may also be the result of postmortem decomposition.

Marine mammals. Between March 19 and April 19, six dolphins (all *Tursiops truncatus*) stranded in 1985, 41 (40 *T. truncatus* and 1

Stenella sp.) in 1986, and 22 (*T. truncatus*) in 1987 in Statistical Area 18. Of these, 15 dolphins in 1986 and 22 in 1987 were considered either fetuses or newborns (length ≤ 47.2 inches [120 cm]). Based on state of decomposition and the reported date of stranding, one adult and two fetal dolphins in 1986 and one adult dolphin in 1987 had died before the March 19 to April 19 sampling period. Only three stranded dolphins were reported in Statistical Area 17 between January 1985 and December 1987. Although dolphins may be impacted by explosions, the relationship between the stranding of dolphins and offshore explosions was not readily apparent (figure 8).

Biological Monitoring at Removal Sites

Turtles. A total of 6 turtles was observed at 3 of 11 removal sites monitored by NMFS (table 1). One sighting of a green turtle (*Chelonia mydas*) and multiple sightings (4 and 7 observations) of two loggerhead turtles were made over a 4-day period near a platform 83.9 mi (135 km) off Sabine Pass just prior to its removal on July 20-21, 1986. After the first of six explosions an upside-down, stunned turtle, presumably a loggerhead, was observed drifting downcurrent about 19.7 ft (6 m) below the surface. Three sightings of loggerhead turtles were reported at two other removal sites. All were observed more than 3,002 ft (915 m) from the detonation sites during helicopter surveys. One was seen during a preblast survey and two during postblast surveys. All turtles were on the surface and dove underwater when approached by observers in a helicopter.

Marine Mammals. Between 0 and 26 dolphins were observed at each of 10 removal sites monitored by NMFS (table 1). On three occasions their presence delayed the scheduled detonation of explosives. Scaring dolphins with small explosive charges and herding dolphins with boats were not always effective in moving the dolphins away from the detonation site. The minimal effort expended on feeding dolphins to lure them from the removal site was unsuccessful.

Fishes. Fishes were killed at all platform removal operations (table 3). The explosive removal of structures in water depths > 65.6 ft (20 m) killed more fish than at shallower sites. An estimated 1,000-2,500 red snapper (*Lutjanus campechanus*) and several cobia (*Rachycentron canadum*), two species under Federal management, were killed at one removal site, where water depth was 137.8 ft (42 m). Postblast samples of fish mortalities showed greater species diversity at deeper sites. The number of fish killed decreased with subsequent explosions at structures requiring multiple detonations.

Exposure of Turtles to an Underwater Explosion

In June 1986, a platform off Bolivar Peninsula, Texas, was removed using 202.9 lb (92 kg) of explosives. Although in-water measurements of pressure levels were not recorded, values based on mathematical models were estimated to be 221, 217, 213, and 209 db for horizontal distances from the detonation site of 750; 1,200; 1800; and 3,000 ft (229 m, 366 m, 549 m, and 915 m), respectively (William Cummings, unpublished data). Two Kemp's ridleys (14.8 and 1.3 lb [6.7 and 0.6 kg]) and two loggerheads (9.3 and 12.1 lb [4.2 and 5.5 kg]) within 1,200 ft (366 m), as well as one loggerhead (15.0 lb [6.8 kg]) at 1,800 ft (915 m), were rendered unconscious by a simultaneous explosion of four 50.7-lb (23-kg) charges. Approximately 0.8 inch (2 cm) of the cloacal lining everted through the anal opening of the Kemp's ridley (14.8 lb [6.7 kg]) positioned at 750 ft (229 m). Ridleys (2.9 and 3.3 lb [1.3 and 1.5 kg])

at distances of 1,800 and 3,000 ft (549 and 915 m) were apparently unharmed. Unconscious turtles recovered when removed from the cages. All loggerheads displayed abnormal pink coloration caused by dilated blood vessels at the base of the throat and flippers. This condition continued for approximately three weeks, after which time all turtles appeared normal. These data verified that explosions can result in both near and far-field injuries to turtles (table 4).

Supplementary data pertaining to fish were collected in conjunction with these experiments. Sheepshead, Atlantic croaker (*Micropogonias undulatus*), Atlantic bumper (*Chloroscombrus chrysurus*), Atlantic spadefish (*Chaetodipterus faber*) and black drum were found dead floating on the surface at the blast site. Necropsy of dead floating fish revealed internal damage ranging from minor tears in the gas bladder to severe lesions of abdominal organs (George Guillen, personal communication). The same species were subsequently found dead on adjacent beaches. Twenty-nine of ninety-nine drift bottles released at the platform were found in the same beach locality as the fishes within two days after the explosion, indicating that surface currents probably were strongly directed toward shore. Three of ninety-nine seabed drifters released at the platform were also recovered along the beach.

Review and Discussion

Relation of Strandings to Explosions

Dates and locations pertaining to the use of underwater explosives at offshore oil and gas structures are scattered throughout oil and gas industry files. No government agency or agencies maintain a complete data base for explosives operations in offshore waters and coastal embayments. It would be a very long, arduous, and costly task to locate these records and compile them into an accurate and useful data base even with the cooperation of everyone involved. But compilation of these data is a prerequisite to comparing sea turtle strandings with the frequency and location of offshore explosions.

Nevertheless, there is a striking relationship between the number of strandings that occurred during a period of high versus low removal activity; 51 turtle strandings occurred in Statistical Area 18 during March 19-April 19, 1986, following 22 nearshore explosions versus 4 strandings during the same period in 1987, when no explosions were reported. Thus, it appears that platform removals may have affected the strandings of turtles near Bolivar Peninsula. Although there is not such a striking relationship between the strandings of dolphins and explosive platform removals, more dolphins were found stranded in Statistical Area 18 during the March 19-April 19 time period in 1986 than in 1985 or 1987.

It is difficult to establish a connection between the stranding of an individual sea turtle and a particular offshore explosion. Turtles found on beaches are usually in such poor condition that it is impossible to determine cause of death even with a necropsy. Dead sea turtles generally sink until decomposition gases float the carcass to the surface two to three days later. Consequently, movement of a carcass may not correspond with that of drift cards released after an underwater explosion. Similarly, it is difficult, using surface observations, to document dead turtles immediately after an underwater explosion. A fresh sea turtle carcass placed 2.2 mi (3.6 km) off the coast of the southeastern United States took 13 days to wash ashore (Sally Murphy, personal communication). Depending on the magnitude and direction of winds and currents, dead

turtles may take weeks to wash ashore. The greater the distance from shore at time of death, the less likely the carcass will reach the beach. In addition, injured turtles are less able to avoid predators or may swim for undetermined distances and times before succumbing to injuries. Murphy also observed sharks feeding on turtle carcasses at sea. Thus, an absence of stranded turtles on the beach is not conclusive evidence that turtles were not injured by offshore explosions.

Relation of Shrimping Effort to Strandings

An increase in turtle strandings did not correspond with an increase in shrimp fishing effort. In Statistical Area 18, strandings were high during March-April 1986. However, shrimping effort within 59.1 ft (18-m) depths was low during March and April in 1985, 1986, and 1987 (130-340 vessel days fished, 50-390 days, and 100-240 days, respectively), while fishing effort was much higher in summer and fall months (840-1,430 vessel days fished, 570-700 days, and 2,400 days through July, respectively).

Turtle strandings increased along the Atlantic coast when the shrimp season opened and fishing effort was high (Sally Murphy). However, low shrimping effort can result in a high incidence of turtle capture and subsequent death in areas where sea turtle density is high. Ogren suggests that the high number of reported captures of juvenile Kemp's ridleys by shrimpers in the mid-1970's may be correlated with high densities of portunid crabs, a primary food source of the ridley turtle.

Effects of Explosions

Information about the effects of underwater explosions on sea turtles is extremely limited. O'Keeffe and Young (1984) describe a series of three underwater shock tests conducted by the Naval Coastal Systems Center near Panama City, Florida in 1981. Despite helicopter surveys for turtles prior to each of three detonations of 1,200 lb (544 kg) of trinitrotoluene (TNT) at middepth in water about 121.4 ft (37 m) deep, at least three turtles were found after the explosions. One turtle was killed at a distance of 500-700 ft (152-213 m); one turtle at 1,200 ft (366 m) sustained minor injuries; and one turtle at 2,000 ft (610 m) appeared to be uninjured. O'Keeffe and Young (1984) assumed that shock waves injured the lungs and other organs that contained gas, as is known to occur in birds and mammals. Researchers also expected the ear drums of turtles to be sensitive and smaller turtles to suffer greater injuries from the shock wave than larger turtles.

In the absence of other information, O'Keeffe and Young (1984) estimated a safe range of at least $259.2 ft/2.2 lb^{(1/3)}$ ($79 m/kg^{(1/3)}$) of explosive. This method predicts a safe range beyond 1,161.5 ft (354 m) for the detonation of a 203-lb (92-kg) explosive. Our data show a damaged cloacal lining in a loggerhead turtle at a distance of 1,200 ft (366 m) from the simultaneous detonation of four charges totaling 203 lb (92 kg). In addition, one loggerhead was rendered unconscious at a distance of 3,000 ft (915 m). Experimental animals were revived during the handling required to assess their physical condition. However, in the wild, unconsciousness will render a turtle more susceptible to predation, and the unconscious turtle may sink to the bottom. Although resting turtles can remain submerged for several hours, the effects of submergence on stunned turtles is unknown.

Little information is available on the effects of explosions on marine mammals (O'Keeffe and Young, 1984). Research conducted at the Lovelace Biomedical and Environmental

Research Institute on the impacts of underwater explosions on dogs, sheep, and monkeys showed similarities between species for response to shock waves as a function of specimen size. Two types of injuries resulted from underwater explosions: (1) hemorrhaging in and around the lungs, and (2) excitation of radial oscillations of small gas bubbles normally present in the intestine (Richmond, Yelverton, and Fletcher, 1973; Yelverton et al., 1973).

Goertner (1982) developed a computer model to predict distances at which marine mammals exposed to underwater explosions would sustain injuries. The model estimated that an Atlantic bottlenose dolphin calf would suffer slight injury at approximately 3,901 ft (1,189 m) from a 1,200-lb (544-kg) charge of TNT detonated at 124.7 ft (38 m) in deep water. O'Keeffe and Young (1984) suggested doubling this estimate to provide an adequate margin of safety. Though currently unavailable, models should be developed specifically for sea turtles and should address conditions encountered in platform removal operations. The magnitude of the impact zone will vary from site to site due to the weight and position (inside or outside piling; above or below mudline) of explosives, water depth, reflectivity of the bottom substrate, and reflectivity of density gradients within the water column. Therefore, existing models require refinement before they can be used with a high degree of confidence to predict safe ranges for turtles.

Since fish aggregate around offshore platforms (Shinn, 1974; Hastings, Ogren, and Mabry, 1976; Jackson, Baxter, and Caillouet, 1978; Gallaway and Martin, 1980; Gallaway and Lewbel, 1982; Tennison, 1985), probably for protection and food, similar factors may operate for sea turtles. Are sea turtles regularly associated with offshore energy structures, or is it only a chance event that turtles may be in the vicinity of a structure when underwater explosives are used?

Data collected at all structure removal sites monitored by NMFS observers from April 1986 through September 1987 show a total of 6 turtle sightings at 3 of 11 structures. Three of these turtles were seen at a single platform in July 1986 by Tim Fontaine (personal communication), who observed them at night apparently feeding on juvenile blue crab (*Callinectes sapidus*) and rock shrimp (*Sicyonia brevirostris*).

A number of turtles have been observed in the vicinity of oil and gas structures in Gulf of Mexico waters off the Texas and Louisiana coasts. Lohoefener (personal communication) reports sighting over 200 turtles during aerial surveys, many in areas characterized by high concentrations of oil platforms. Fuller and Tappan (1986) reported two turtles observed by divers at Louisiana oil platforms. One of these, a leatherback (*Dermochelys coriacea*), apparently became entangled under the platform and died. We assume these structures provide a resting place or a location where food is readily available. Diving clubs have reported 27 underwater observations of sea turtles in the northwestern Gulf of Mexico through August 1987. Nine of these were associated with Texas oil platforms (Sharon Manzella, personal communication).

Eight scientific studies conducted in the Gulf of Mexico between 1975 and 1985 offer insights on the distribution and behavior of turtles around natural and artificial reef structures, although the studies did not focus on sea turtles (Rosman et al., 1987). The conclusion, based entirely on observations by divers, submersibles, and time-lapse photography, is that underwater sightings of turtles were infrequent. Photographs often showed turtles lying on the sea floor within the con-

fines of the camera assembly. More turtles were photographed at night than during the day. Successive photos suggested that turtles might remain within 9.8 ft (3 m) of the camera assembly for more than 2-3 h. One individual loggerhead, identifiable by barnacle patterns on the shell, was seen at the West Flower Garden Bank in the Gulf of Mexico by scuba divers in February, June, and September of 1980. Rosman et al. (1987) suggested the superiority of time-lapse photography over diver observations based on 231 turtle sightings in 25,186 photographs versus 1 sighting in 77 dives in the southwest Florida study.

At the Buccaneer Platforms off Galveston, Texas, 4 sightings were reported during 527 research dives between August 1977 and September 1980 (Rosman et al., 1987). Two of the four turtles were lying on the sea bottom in physical contact with the structure. The number of sightings may represent a minimum number of turtles in the area because the attention of divers was not focused on turtles. In a similar situation on August 20, 1987, Gitschlag conducted a task-oriented dive at Buccaneer without sighting a turtle, although Renaud observed one turtle twice within 20 minutes from a dive boat at the surface.

Further evidence that turtles are found around other manmade structures comes from studies at Florida Power & Light Company's St. Lucie Plant. Between 1976 and 1986, 1,530 sea turtles were entrained through three cooling water inlet pipes (12-16-ft [3.7-4.9-m] diameter) located 1,200 ft (365 m) offshore. The species composition of turtles included 86 percent loggerheads, 13 percent greens, and about 1 percent leatherbacks, Kemp's ridley, and hawksbill (*Eretmochelys imbricata*) combined (Florida Power and Light Company, 1986).

The above data show that turtles are found in the vicinity of offshore structures. However, the nature of this association cannot be satisfactorily described without further investigation. Quantification of resident versus transient turtles, distance at which resident turtles may range from structures, and seasonal abundance in various geographic areas are just a few of the questions that remain to be answered.

It is interesting to note a difference in regulations for installation versus removal of offshore oil and gas structures. Extensive environmental impact statements are prerequisite to installation of offshore structures. In contrast, prior to 1986 no formal environmental monitoring was required for structure removal, despite the fact that these structures represent more hard substrate habitat than occurs in all the natural reef and hard bank areas off the Louisiana coast (Reggio, Van Sickle, and Wilson, 1986). If recent estimates are correct, between 1,600 and 2,000 offshore oil and gas structures are to be removed from the Gulf of Mexico by the end of the century. This raises serious questions about the impacts not only of explosives but also of the potential loss of valuable habitat to a wide variety of marine life.

While it is important to continue monitoring the biological impacts of explosive offshore removals, it is also necessary to develop methods to disperse protected marine life from removal sites prior to detonating explosives. Standard procedures could then be implemented to minimize impacts to turtles and dolphins while simultaneously reducing the delays affecting the structure removal process at present.

Conclusions

Although sea turtles and dolphins are found at offshore energy structures, the details of this association have not been thoroughly investigated. No cause-and-effect relationship between turtle and dolphin mortalities and offshore explosions has been documented because no dead animals have been recovered at removal sites. Fish were killed at all removal sites monitored by NMFS personnel. Experimentally exposed turtles and, consequently, wild turtles can be injured by underwater explosions. Comparison of turtle stranding data during periods characterized by high and low numbers of offshore explosions suggests a connection between explosions and the number of turtle strandings; data are less supportive of a relationship between explosions and dolphin strandings. The high number of dead turtles stranded in close proximity to nearshore structure removals provides circumstantial evidence that at least some may have been killed by underwater explosions. However, it is apparent that other factors, including capture in shrimp trawls, ingestion of plastic refuse, and entanglement in debris, are also responsible for turtle mortalities.

Acknowledgments

We acknowledge the assistance of Marcel Duronslet for providing information on NMFS beach stranding effort and turtle stranding data. Dennis Koi prepared computer graphic representations of the data. The Texas Marine Mammals Stranding and Salvage Network supplied information on marine mammal strandings.

References Cited

Florida Power and Light. 1986. Florida Power and Light Company St. Lucie Unit 2, Annual Environmental Operating Report. Atlanta: Applied Biology, Inc. 99 pp.

Fuller, D. A. and A. M. Tappan. 1986. The occurrence of sea turtles in Louisiana coastal waters. Baton Rouge, La.: Louisiana State University, Coastal Fisheries Institute. LSU-CFI-86-28. 46 pp.

Gallaway, B. J. and G. S. Lewbel. 1982. The ecology of petroleum platforms in the northwestern Gulf of Mexico: a community profile. Washington: U.S. Fish and Wildlife Service, Office of Biological Services. FWS/OBS-82/27; and New Orleans: Bureau of Land Management, Gulf of Mexico OCS Regional Office, Open-File Report 82-03. 92 pp.

Gallaway, B. J. and L. R. Martin. 1980. Effect of gas and oilfield structures and effluents on pelagic and reef fishes, and demersal fishes and macrocrustaceans. Vol. 3. In: W. B. Jackson and E. P. Wilkens, eds. Environmental assessment of Buccaneer Gas and Oil Field in the northwestern Gulf of Mexico. NOAA Technical Memo, 1978-79. National Oceanic and Atmospheric Administration/National Marine Fisheries Service Annual Report to Environmental Protection Agency. Memo. NMFS-SEFC-37. Available from National Technical Information Service, Springfield, Va. 49 pp.

Goertner, J. F. 1982. Prediction of underwater explosion safe ranges for sea mammals. Naval Surface Weapons Center. NSWC TR 82-188. 31 pp.

Hastings, R. W., L. H. Ogren, and M. T. Mabry. 1976. Observations of the fish fauna associated with offshore platforms in the northwestern Gulf of Mexico. U.S. Fish and Wildlife Service. Fisheries Bulletin 74:387.

Henwood, T. A. and W. E. Stuntz. 1987. Analysis of sea turtle captures and mortalities aboard commercial shrimp trawling vessels. Fisheries Bulletin 84: In Press.

Jackson, W. B., K. N. Baxter, and C. W. Caillouet. 1978. Environmental assessment of the Buccaneer Oil and Gas Field off Galveston, Texas: an overview. In: Proceedings, Offshore Technology Conference. Houston. 3081:277-284.

Klima, E. K. 1980. Catch statistics: data needs of the southwestern South America shrimp populations. WECAF Reports No. 28, pp. 123-130.

National Research Council Marine Board. 1985. Disposal of offshore platforms. Washington: National Academy Press. 88 pp.

O'Keeffe, D. J. and G. A. Young. 1984. Handbook on the environmental effects of underwater explosions. Naval Surface Weapons Center. NSWC TR 83-240. 209 pp.

Reggio, V., V. Van Sickle, and C. Wilson. 1986. Rigs to reefs. Louisiana Conservationist 38(1):5-7.

Richmond, D. R., J. T. Yelverton, and E. R. Fletcher. 1973. Far-field underwater-blast injuries produced by small charges. Defense Nuclear Agency, Dept. of Defense. Technical Progress Report DNA 3081T.

Rosman, I., G. S. Boland, L. R. Martin, and C. R. Chandler. 1987. Underwater sightings of sea turtles in the northern Gulf of Mexico. OCS Study/MMS 87-0107. New Orleans: U.S. Dept. of the Interior, Minerals Management Service. 37 pp.

Shinn, E. A. 1974. Oil structures as artificial reefs. In: L. Colunga and R. Stone, eds. Proceedings of an international conference on artificial reefs. College Station, Tex.: Center for Marine Resources, Texas A&M University. pp. 91-96.

Tennison, D. E. 1985. Offshore structures as artificial reefs (Abstract). Bull. Mar. Sci. 37(1):401-402.

Yelverton, J. T., D. R. Richmond, E. R. Fletcher, and R. K. Jones. 1973. Safe distances from underwater explosions for mammals and birds. Defense Nuclear Agency, Dept. of Defense, Technical Report DNA 3114T. 64 pp.

Personal Communications

Cummings, William. TRACOR, 9150 Cheasapeake, Suite 107, San Diego, Cal. 92123.

Fontaine, Tim. National Marine Fisheries Service, 4700 Avenue U, Galveston, Tex. 77551.

Guillen, George. Texas Parks and Wildlife Department, P.O. Box 8, Seabrook, Tex.

Landry, Andre. Texas A&M University, 5007 Avenue U, Galveston, Tex. 77551.

Lohoefener, Ren. National Marine Fisheries Service, 3209 Frederic Street, Pascagoula, Miss. 39567.

Manzella, Sharon. National Marine Fisheries Service, 4700 Avenue U, Galveston, Tex. 77551.

Murphy, Sally. South Carolina Wildlife and Marine Resources Department, P.O. Box 12599, Charleston, S. C. 29412.

Ogren, Larry H. National Marine Fisheries Service, 3500 Delwood Beach Road, Panama City, Fla. 32407.

Dr. Edward F. Klima received his Ph.D. in fisheries at the University of Utah. He has 25 years of experience in fisheries in the Gulf of Mexico and has written over 50 publications on fisheries. For the past 9 years, he has been the Director of the Galveston Laboratory of the National Marine Fisheries Service.

Mr. Gregg R. Gitschlag is a fishery biologist with the National Marine Fisheries Service. He received his B.S. in zoology from the University of Michigan in 1974 and his M.S. in biological oceanography from Florida State University in 1978.

Dr. Maurice L. Renaud is an ecologist with the National Marine Fisheries Service. He received his B.A. (1970) and M.S. (1971) from the University of Hawaii and his Ph.D. in zoology from Arizona State University in 1977.

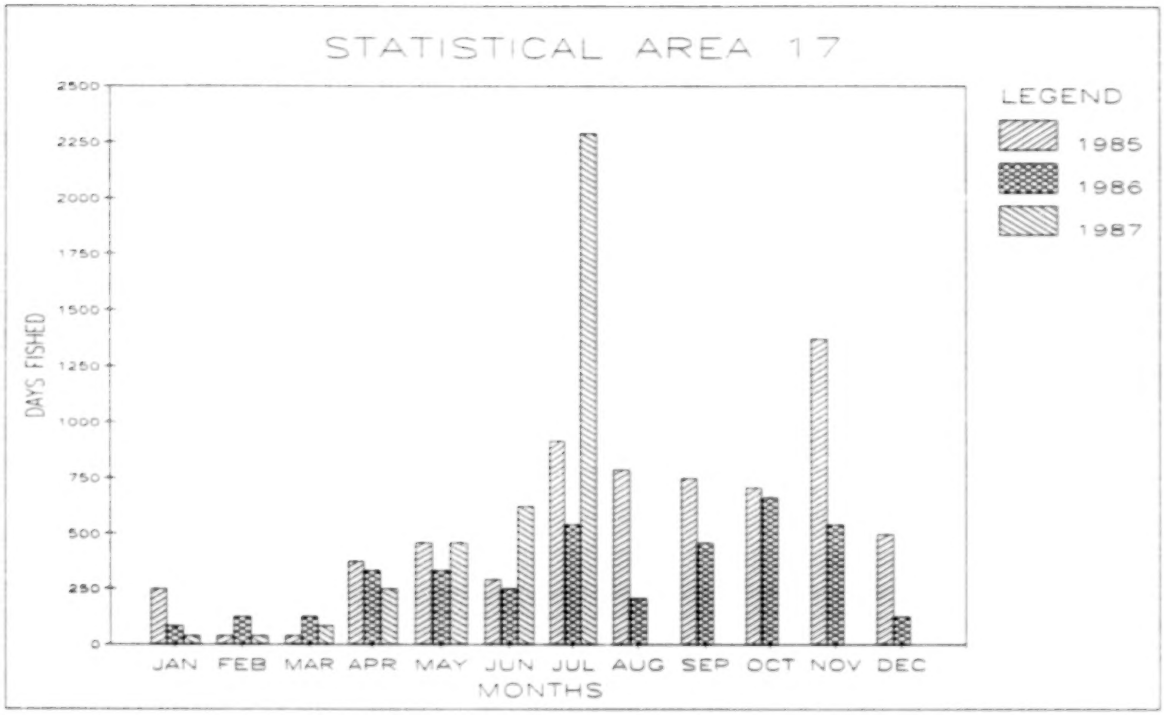

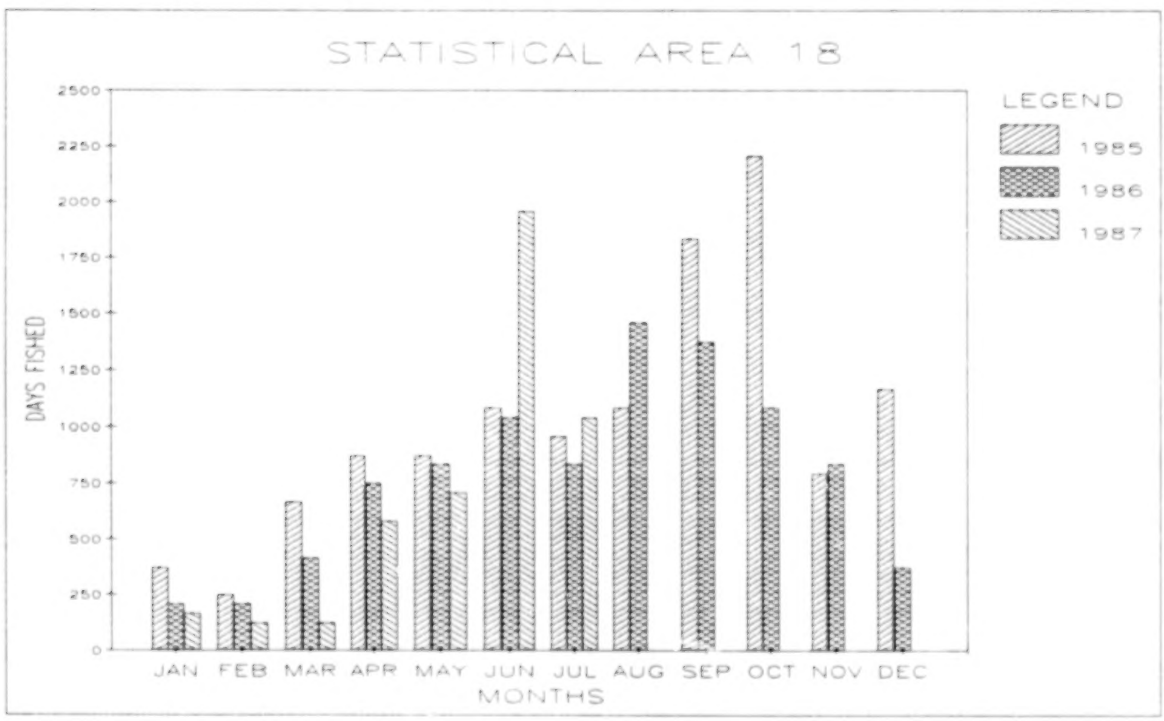

Figure 1. Offshore shrimping effort in 0-59.1 ft (0-18 m) depths for Statistical Areas 17 and 18, 1985-1987.

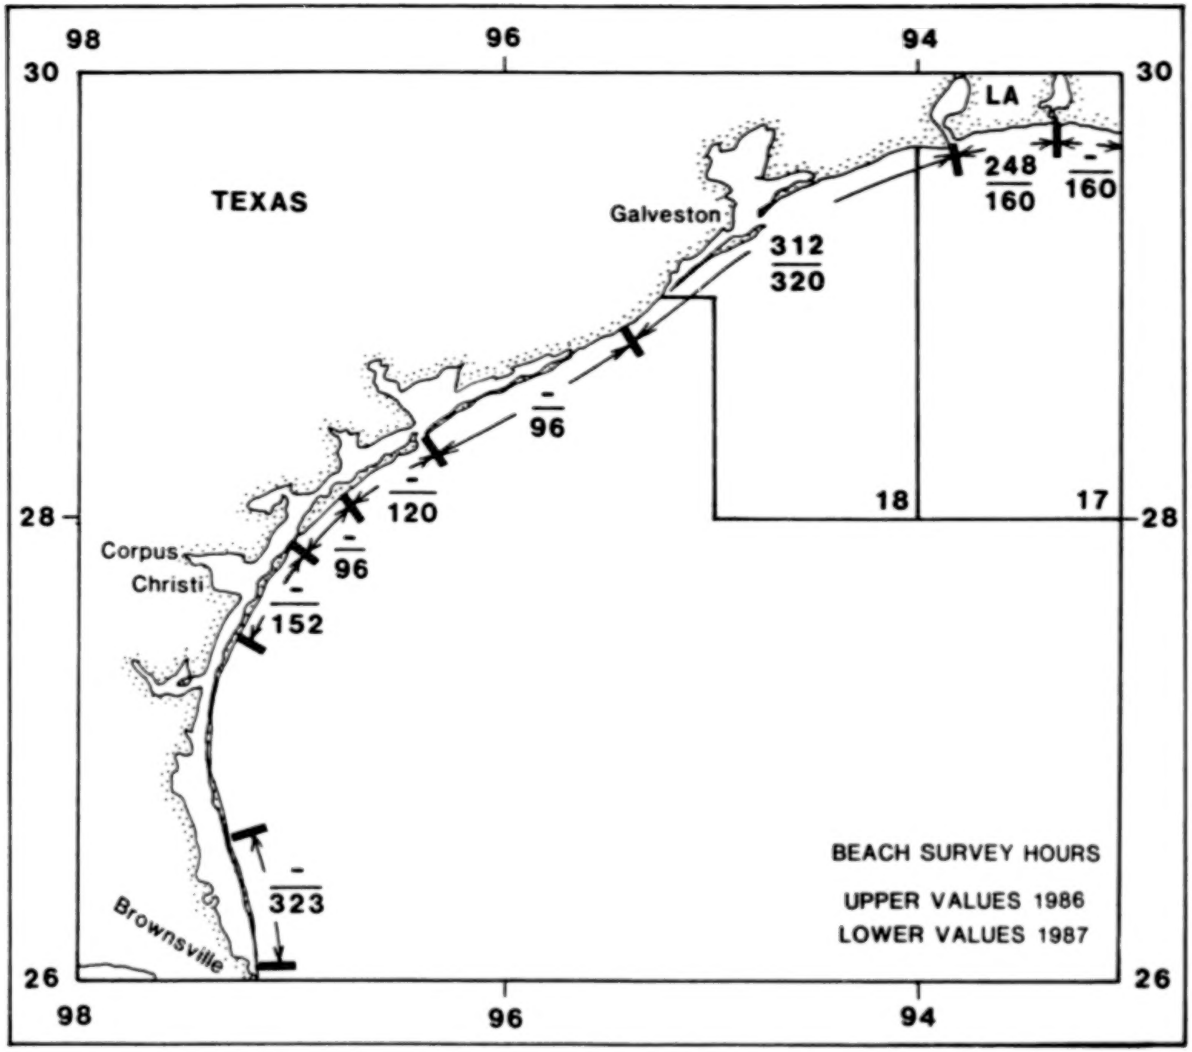

Figure 2. NMFS-sponsored beach survey effort (man-hours) for monitoring turtle stranding events along the western coast of the Gulf of Mexico. Upper numerals represent 1986 hours and lower numerals 1987 hours expended on surveys of the coastline as indicated.

AS SUBMITTED BY AUTHOR

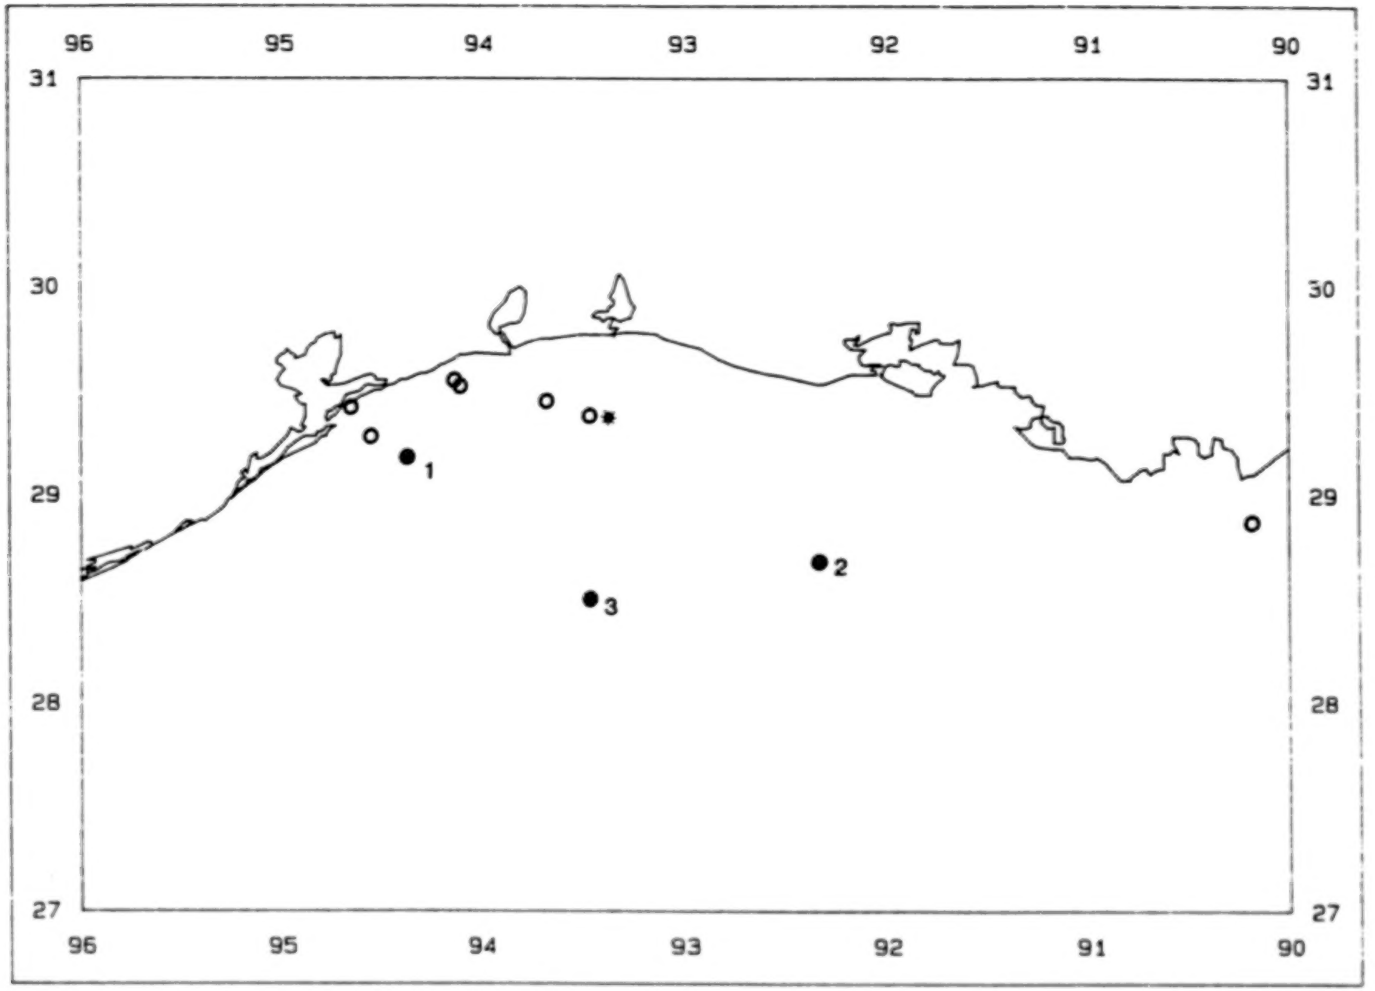

Figure 3. Locations of NMFS-monitored platform and caisson removals. Open circles indicate removal locations where sea turtles were not observed. Solid circles with adjacent numerals indicate locations and frequencies of turtles sightings. An open circle marked with an asterisk indicates two caissons were removed.

AS SUBMITTED BY AUTHOR

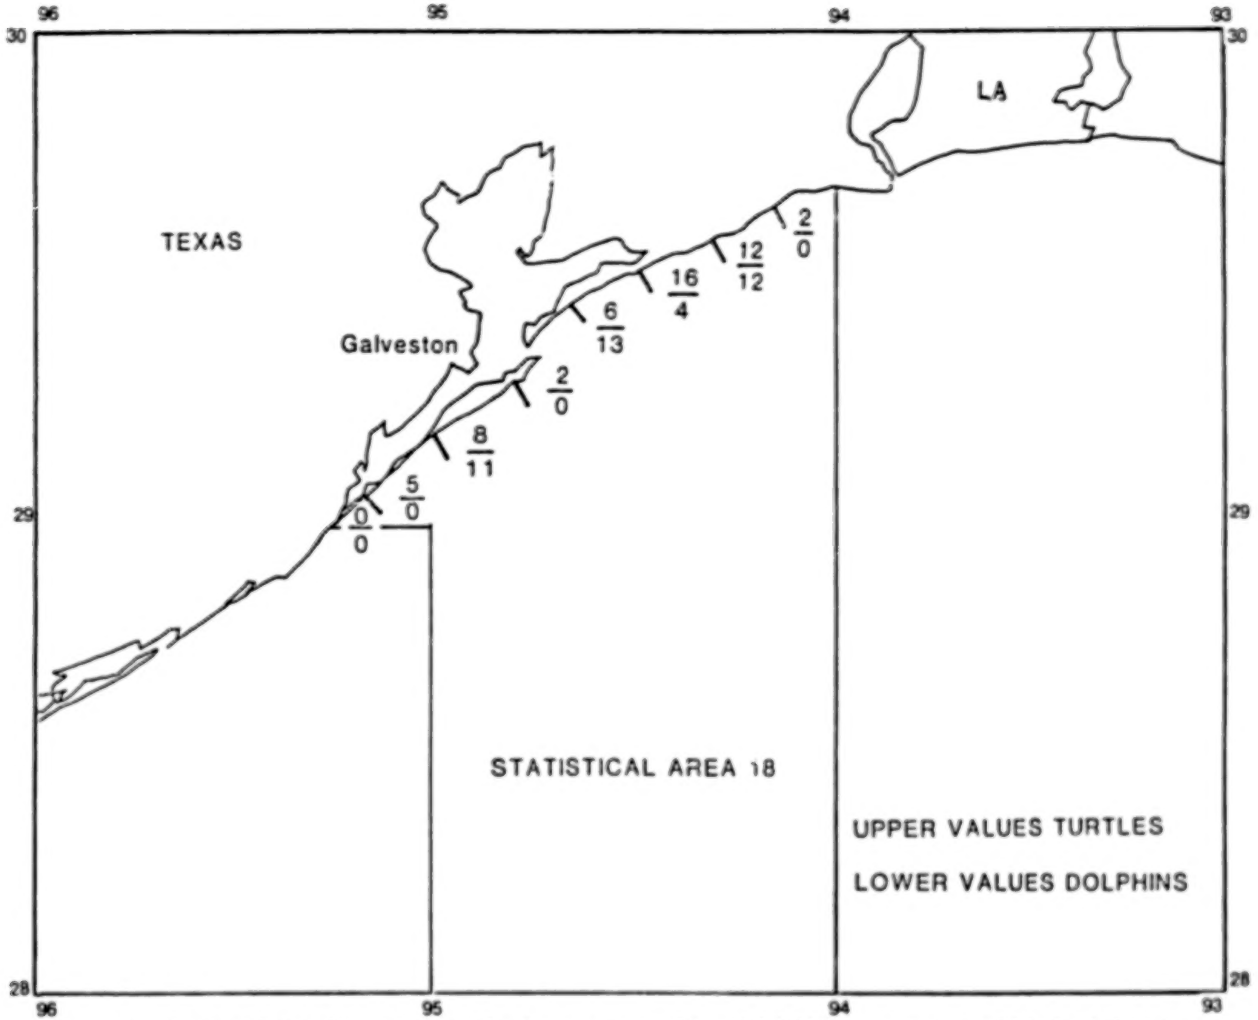

Figure 4. Reported strandings of sea turtles (upper numerals) and dolphins (lower numerals) in Statistical Area 18 between March 19 and April 19, 1986.

AS SUBMITTED BY AUTHOR

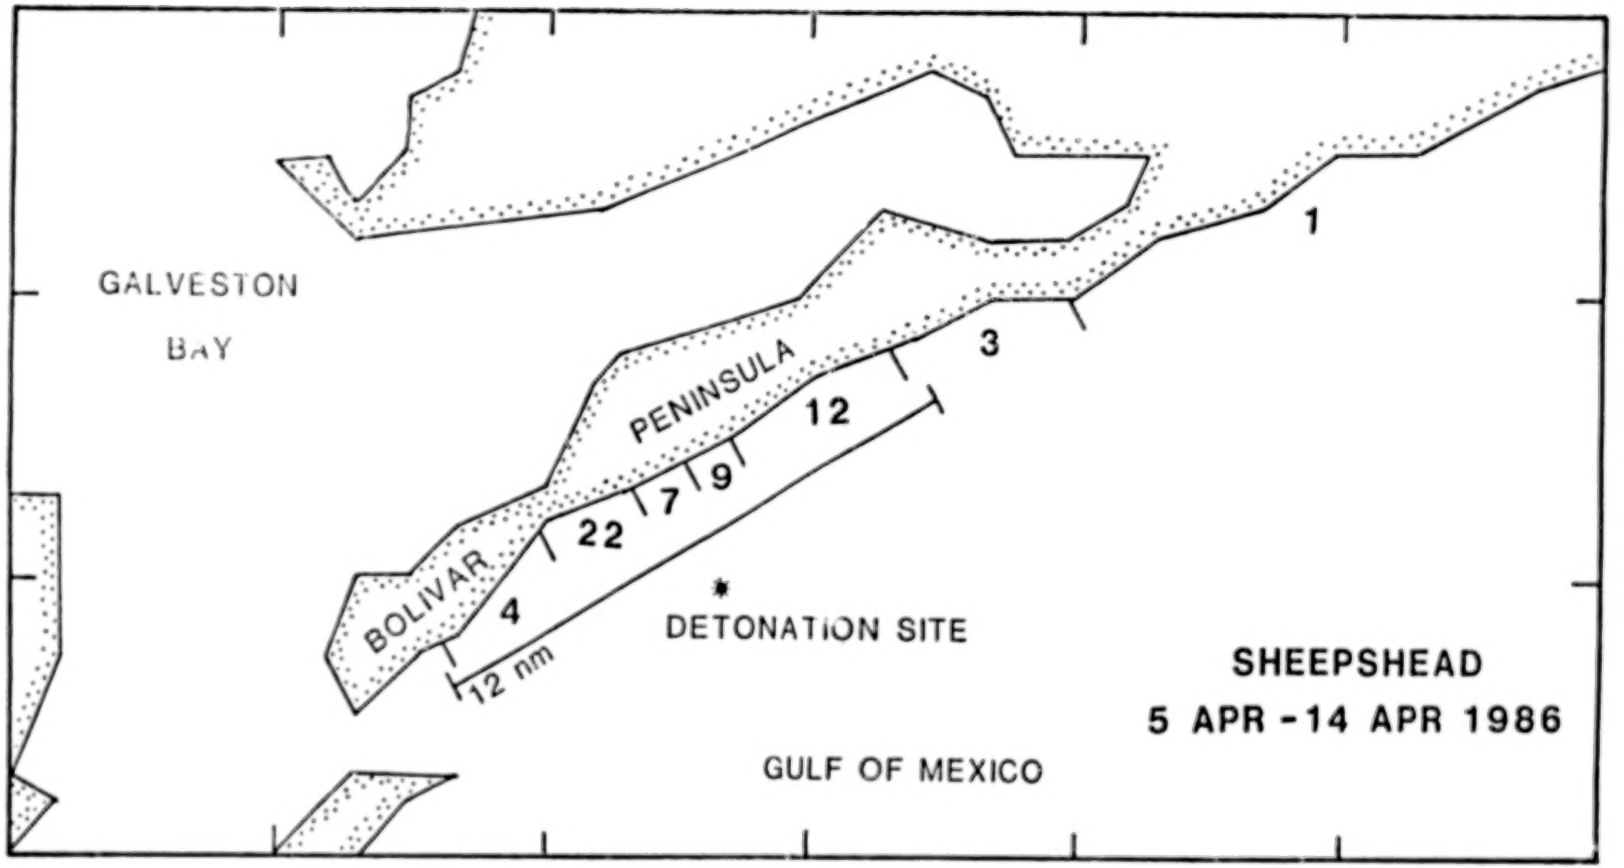

Figure 5. Strandings of sheepshead reported on Bolivar Peninsula from April 5-19,1986.

AS SUBMITTED BY AUTHOR

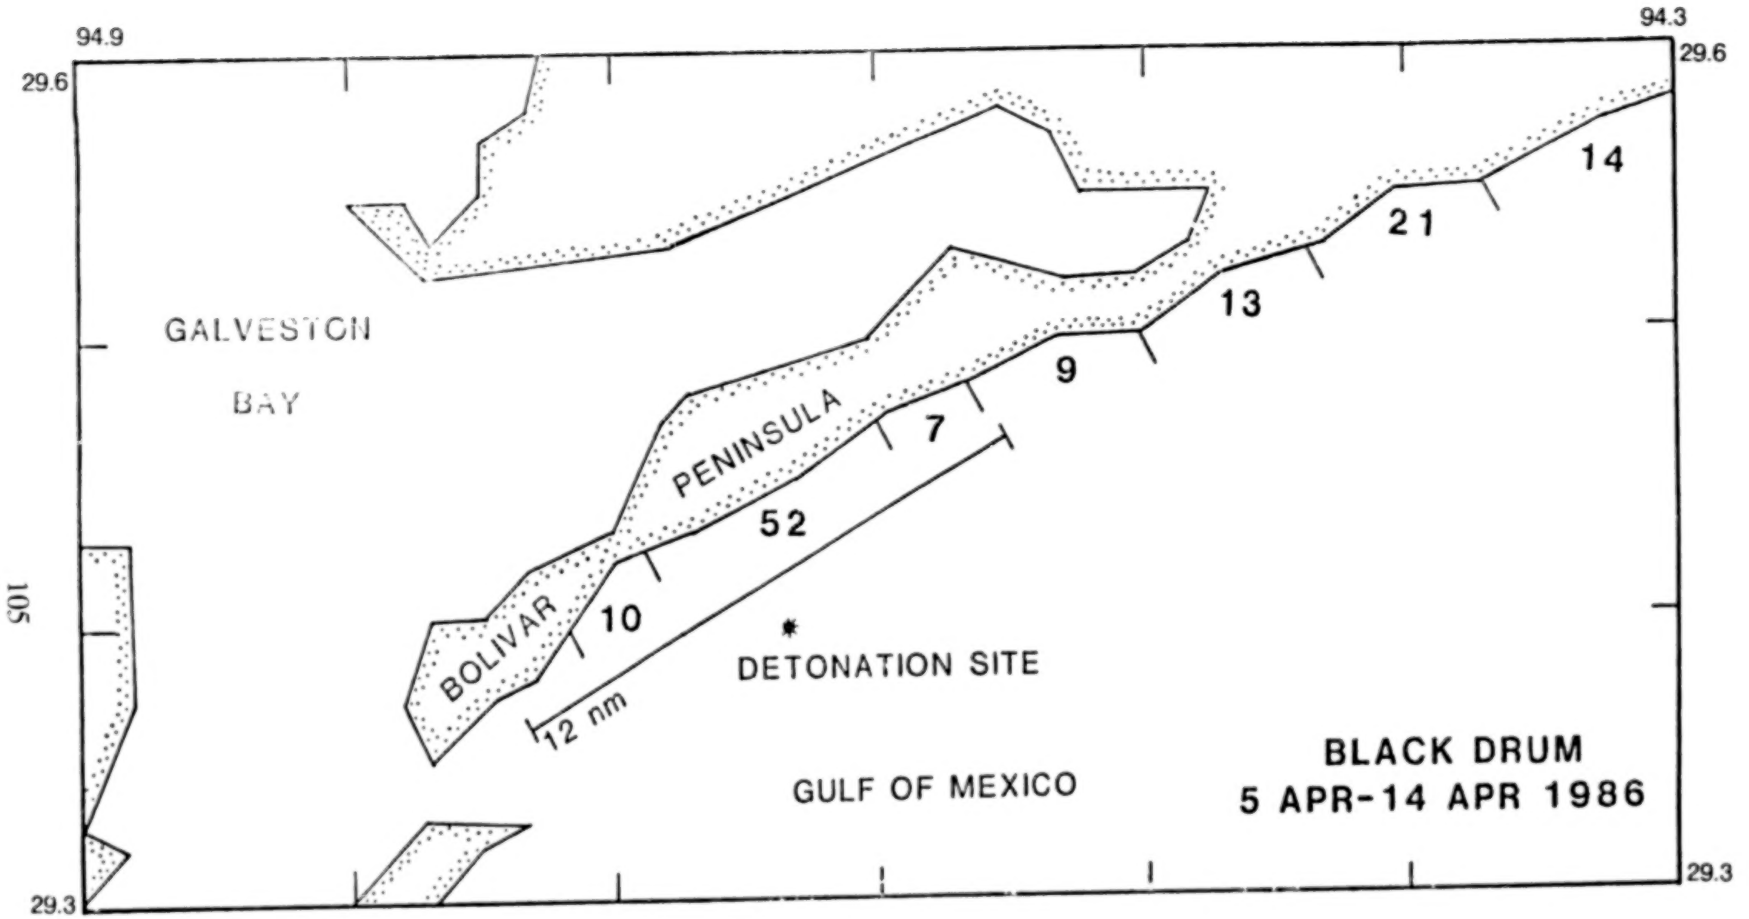

Figure 6. Strandings of black drum reported on Bolivar Peninsula from April 5-19,1986.

AS SUBMITTED BY AUTHOR

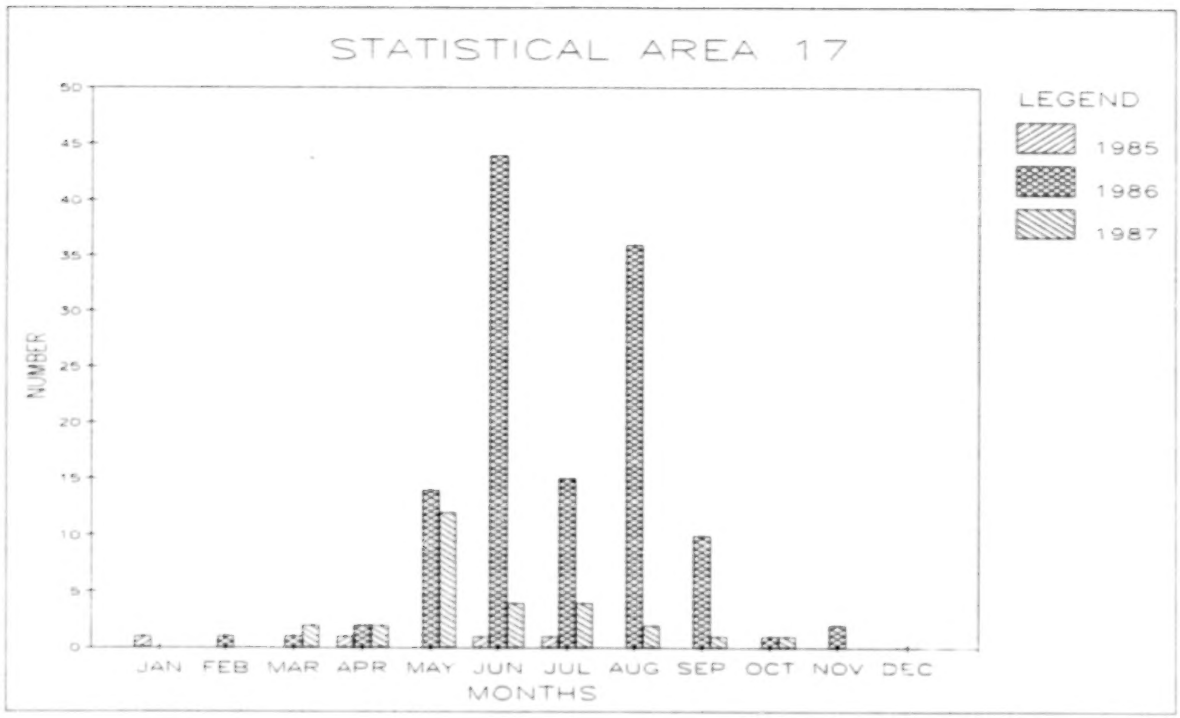

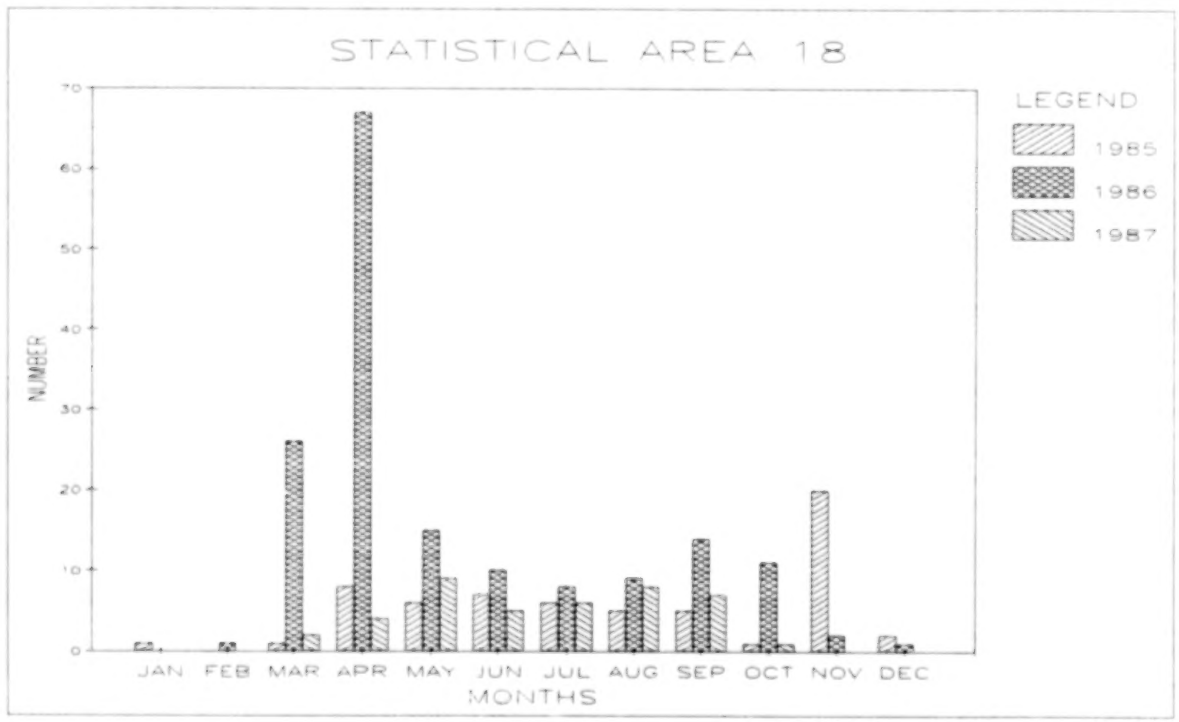

Figure 7. Frequency of sea turtles strandings reported in Statistical Areas 17 and 18, 1985-1987. Strandings in 1985 were reported by the public and confirmed by NMFS.

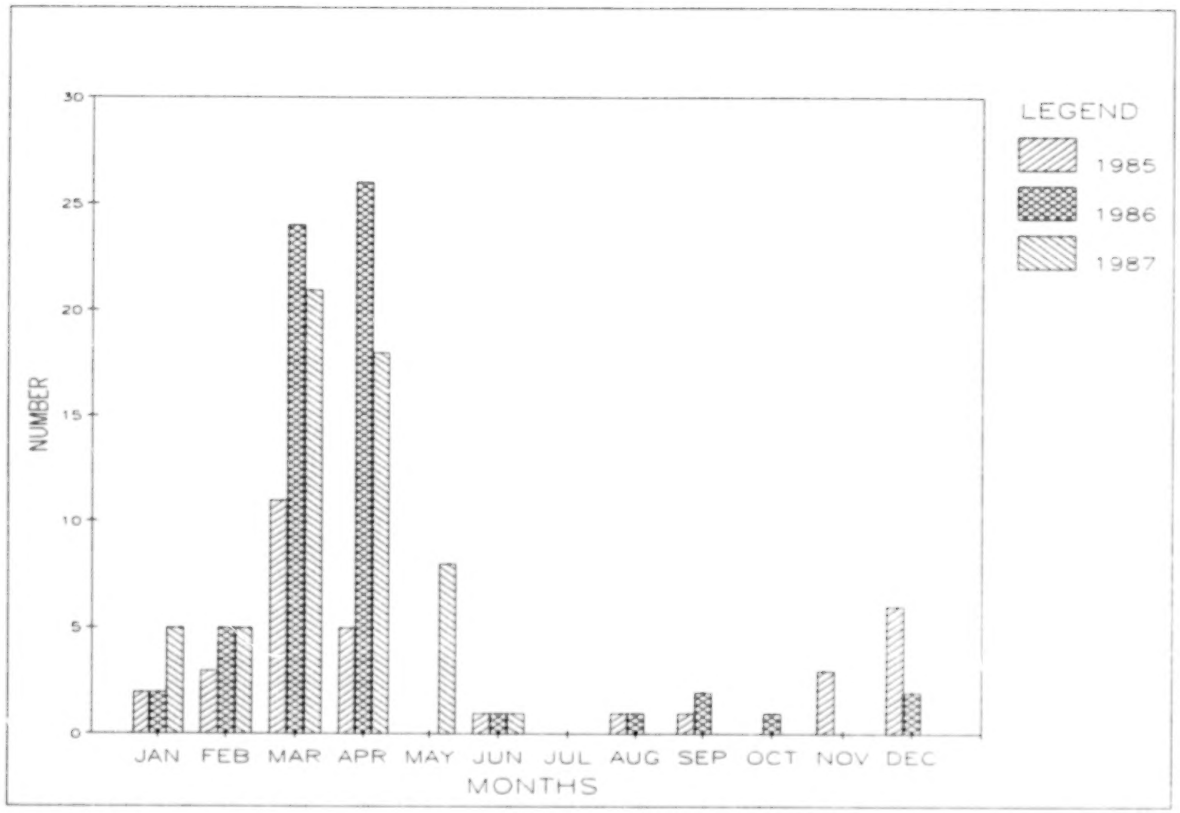

Figure 8. Frequency of marine mammal strandings reported in Statistical Area 18, 1985-1987. Strandings in 1985 were reported by the public and confirmed by NMFS.

Table 1

Man-hours of Observation at NMFS-monitored Removals with Accompanying Sightings of Turtles and Dolphins

(Refer to figure 6 for platform locations.)

Date of Removal	Approximate Distance from Shore (nmi)	Depth (m)	Structure Removed	Man-hours of Observation	Turtles Sighted	Dolphins Sighted
				day/night		
4/86	1	9	Platform	8/0	0	26
7/86	75	42	Platform	76/48	3	18
11/86	10	15	Platform	28/14	0	0
12/86	6-9	12	2 Caissons	21/0	0	15
3/87	55	39	Platform	52/45	2	24
4/87	21	16	Caisson	13/0	1	13
6/87	17	27	Platform	73/0	0	26
9/87	15-18	10-15	3 Caissons	30/12	0	17

Table 2

March-April 1986 Schedule of Removals of Oil and Gas Field Structures off Bolivar Peninsula

(The total weight (kg) of explosive utilized at each detonation and the number of turtles and dolphins stranded in Statistical Area 18 during this time period are also presented.)

Date	Weight of Explosive (kg)	Approximate Time (H)	Lat.	Long.	Turtles	Dolphins
1-18 March		-	-	-	9	4
19	45	1632	29°25′	94°39′	0	3
	109	1758	29°25′	94°39′		
20	27	2235	29°25′	94°39′	1	0
21	109	1703	29°25′	94°39′	3	0
22	27	1130	29°25′	94°39′	0	0
23	27	0815	29°25′	94°39′	0	1
24	109	1425	29°25′	94°39′	0	0
25	45	1100	29°25′	94°39′	0	0
	76	1333	29°25′	94°39′		
26	18	1630	29°25′	94°39′	5	2
27	109	1220	29°25′	94°39′	1	0
	27	1440	29°25′	94°39′		
28	27	1545	29°25′	94°39′	3	0
29	27	0845	29°25′	94°39′	0	0
	109	1310	29°25′	94°39′		
	55	2330	29°25′	94°39′		
30	35	1020	29°25′	94°39′	3	14
31	109	1015	29°25′	94°39′	1	0
1 April	23	1710	29°25′	94°39′	2	4
2	76	0805	29°25′	94°39′	0	0
3	-	-	-	-	0	0
4	-	-	-	-	1	4
5	59	1251	29°25′	94°39′	2	1
	109	1451	29°25′	94°39′		
6-19	-	-	-	-	29	12
20-30	-	-	-	-	32	5

Table 3

Fish Collected at NMFS-monitored Structure Removals (surface collection/bottom collection)

Structures	12/86 2 Caissons	3/87 Platform	4/87 Caisson	6/87 Platform	9/87 3 Caissons
Depth (m):	12	39	16	27	10-15
Fish Species by Family					
Ariidae					
Hardhead catfish	-	-	-	-	18/0
Balistidae					
Gray triggerfish	0	1/0	-	1/0	2/0
Blenniidae					
Blenny	0/1	-	-	-	-
Carangidae					
Atlantic bumper	-	-	-	-	27/0
Blue runner	-	-	-	32/10	0/1
Unknown	-	1/0	-	-	-
Clupeidae					
Menhaden	5/0	-	8/14	-	-
Elopidae					
Ladyfish	-	-	-	-	4/0
Engraulidae					
Anchovy	0/1	-	-	-	-
Ephippidae					
Atlantic spadefish	5/1	6/0		31/1	63/18
Grammistidae					
Soapfish	-	2/0	-	-	-
Kyphosidae					
Bermuda chub	-	5/0	-	1/0	-
Lutjanidae					
Lane snapper	-	17/0	-	7/0	1/5
Mutton snapper	-	-	-	3/1	-
Red snapper	-	6/0	12/1	1/0	20/2
Vermilion snapper	-	5/0	-	-	-
Pomadasyidae					
Grunt	-	1/0	2/1	-	-

Table 3

Fish Collected at NMFS-monitored Structure Removals (surface collection/bottom collection) (continued)

Structures	12/86 2 Caissons	3/87 Platform	4/87 Caisson	6/87 Platform	9/87 3 Caissons
Depth (m):	12	39	16	27	10-15
Fish Species by Family					
Priacanthidae					
Bigeye	-	1/0	-	-	-
Sciaenidae					
Black drum	-	6/0	-	-	-
Croaker	-	-	-	-	72/1
Seatrout	1/0	3/0	4/2	-	2/3
Spot	-	-	16/7	-	-
Unknown	1/0	-	-	-	-
Serranidae					
Unknown	-	-	-	4/0	-
Sparidae					
Knobbed porgy	-	4/0	-	-	-
Pinfish	2/0	-	-	-	2/0
Sheepshead	8/0	13/1	131/13	52/3	5/3

Table 4

Description of Turtle Injuries with Respect to Distance from Explosion and Estimated Energy Level (db) of Shockwave

Turtle Species	Distance From Explosion (m)	Estimated Energy Level (db)	Immediate Injuries	1-H Post Blast
Lepidochelys kempi	229	221	unconscious	2 cm of cloaca everted; vasodilation around throat and flippers; vasodilation lasted 2-3 weeks
Caretta caretta	229	221	unconscious	vasodilation around throat and flippers; redness around eye and nose; vasodilation lasted 2-3 weeks
L. kempi	366	217	unconscious	appeared normal
C. caretta	366	217	unconscious	normal behavior, but vasodilation present around base of flippers; vasodilation lasted 2-3 weeks
L. kempi	549	213	none visible	appeared normal
C. caretta	549	213	none visible	appeared normal except for vasodilation around throat and flippers; vasodilation lasted 2-3 weeks
L. kempi	914	209	none visible	appeared normal
C. caretta	915	209	unconscious	appeared normal except for vasodilation around throat and flippers; vasodilation lasted 2-3 weeks

The Relationship of Rigs-to-Reefs to U.S. Environmental Conservation Law

Ms. Suzanne Iudicello
Center for Marine Conservation
Washington, D.C.

Abstract

Legal and policy research examines the Rigs-to-Reefs concept as an alternative to obsolete petroleum production platform removal in the context of existing U.S. wildlife conservation law.

The Endangered Species Act and the Marine Mammal Protection Act and their implementing regulations provide procedures for the taking of endangered species and marine mammals. The Outer Continental Shelf Lands Act and its accompanying regulations require removal of obsolete platform structures. A recent review of those regulations requested comments on use of platforms as artificial reefs as an alternative to removal, but subsequent regulatory revisions did not include this option.

Concurrent with the regulatory proposals, it became obvious that the explosive removal of obsolete petroleum production structures could result in the death or injury of endangered sea turtles and protected marine mammals. This analysis reviews the compliance of the National Marine Fisheries Service and the Minerals Management Service (MMS) with the Section 7 consultation procedures mandated by the Endangered Species Act and the Section 101 Small Take Exemption requirements of the Marine Mammal Protection Act.

A review of the statutes, regulations, and legislative history was compiled as a basis from which to assess the regularity of permit procedures and the effectiveness of agency use of consultations. The objective of the review was to insure agency compliance with existing law. Initial review and analysis provided the impetus for improved agency permit review and subsequent modification of agency procedures for initiating consultations.

Introduction

The notion that obsolete oil production platforms can be good for fish and good for fishermen is now widely accepted. With the passage in 1984 of the National Fishing Enhancement Act (Public Law 98-623), the recognition that obsolete offshore structures could be valuable in developing artificial reefs for fishery enhancement and development became national policy. Included in that recognition was the potential of saving at least part of the high cost of removing an anticipated 20 to 30 obsolete rigs per year over the next 10 years (Reggio, 1987). But while Rigs-to-Reefs can make for good sport and good business, can the practice also make for good environmental policy?

As has been the case with so many technological developments from plastics to nuclear reactors, no one thought, when rigs were deployed off our shores, of the environmental consequences of removing them after they served their function and were no longer useful. One of the unforeseen environmental consequences of rig removals has been the potential hazard to protected marine species through the use of explosives in the removal of obsolete platforms.

The resultant controversy will be explored in the case study of several platform removals in the Gulf of Mexico set out below. In tracking the response of public interest groups, the offshore industries, and the government agencies responsible for protecting marine

species, a policy question for the future emerges: how can we successfully blend the purposes and objectives of the National Fishing Enhancement Act with pre-existing mandates set out by national energy development *and* national conservation legislation?

The Legal Framework

The Outer Continental Shelf (OCS) Lands Act[1]

The Outer Continental Shelf Lands Act (OCS Act) (43 U.S.C. 1301 et seq.) declares the rights of the United States in exploring, developing, and conserving the natural resources off its coasts. Those natural resources are defined by the Act to include not only submerged oil, gas, and minerals, but also living resources such as fish, shellfish, and marine mammals (43 U.S.C. 1301(e)). The Secretary of the Interior has the authority to carry out the Act and to promulgate necessary regulations (43 U.S.C. 1334). Among the other duties it sets forth, the Act states that the Secretary "may . . . prescribe and amend such rules and regulations as he determines to be necessary and proper in order to provide for the prevention of waste and conservation of the natural resources of the Outer Continental Shelf." This language has been construed by the courts to mean not only conservation of mineral resources, but all natural resources as defined by the Act (*Gulf Oil Corp.* v. *Morton*, 493 F. 2d at 144-45 (5th Cir. 1975)). In fact, some commentators have suggested that the Secretary's duty to exercise his authority to conserve all natural resources is mandatory, not discretionary, particularly when combined with the mandate of the National Environmental Policy Act (NEPA) (Gaines and Schmidt, 1978).

The regulations for leasing in the OCS, among other provisions, require that "[w]henever practicable, the Director [of the Minerals Management Service] shall require the plugging and abandonment of any well which the Director determines is no longer useful" (30 C.F.R. 250.15). The process by which such an abandonment occurs was, until recently, set out in a series of orders from the regional OCS offices. The regulations also include a section on NEPA compliance (30 C.F.R. 250.34-4).

In a revision to the regulations proposed in 1986, the MMS solicited comments on amendments that would consolidate technical requirements and add provisions for platform removal by merging the various orders into a "single set of regulations which would apply generally to platforms and structures on the OCS" (51 *Fed. Reg.* 8332, March 18, 1986). The proposed language relating to removals required the lessee to remove all structures in a manner approved by the Regional Supervisor, clear the area of all obstructions, remove the platforms to a depth of at least 15 ft (4.6 m) below the mudline, and notify the agency by letter that the work had been completed. There were no provisions for advance notice of a removal, nor the assessment of potential environmental impacts from the use of explosives in the marine environment.

In the same proposed revision, the Service noted growing support for the concept of Rigs-to-Reefs and solicited comments on allowing platforms to remain in place entirely or partially "if there are benefits to be obtained and the multiple-use concept of the OCS will not be violated" (51 *Fed. Reg.* 9333-34). The notice posed several questions about the alternative of allowing structures to remain in the OCS and sought views on opportunities, costs, technical problems, disruption or enhancement of fisheries habitat, criteria for identifying platforms with artifi-

cial reef potential, maintenance, and liability (51 *Fed. Reg.* 9334).

The Endangered Species Act

The Endangered Species Act (ESA) (16 U.S.C. 1531 et seq.) was passed in the recognition that human activities were rendering species of fish, wildlife, and plants extinct or were threatening them with extinction. The Congress, in finding that these species were of value and should not be lost, stated its policy that "all federal departments and agencies shall seek to conserve endangered species and threatened species and shall utilize their authorities" to protect the ecosystems upon which such species depend (16 U.S.C. 1531(c)). The act restricts the taking of species presently in danger of extinction or likely to become so, regulates trade in them, provides for the designation and acquisition of critical habitat, and requires that Federal agencies consider impacts upon them in conducting various Federal activities (Bean, 1984). While the Departments of the Interior (U.S. Fish and Wildlife Service [USFWS]) and Commerce (National Marine Fisheries Service [NMFS]) are designated as the responsible agencies for carrying out the purpose of the Act, *all* Federal agencies are charged with ensuring that "any action authorized, funded, or carried out by such agency . . . is not likely to jeopardize the continued existence of any endangered species or threatened species" (16 U.S.C. 1536). The method whereby each agency is to ensure that no jeopardy exists is called the "Section 7 Consultation," after the portion of the Act cited, which requires that every agency consult with either Interior or Commerce before undertaking an action.

Regulations interpreting and implementing Section 7 of the Act are set out at 50 C.F.R. 402.04 et seq. The onus is on the acting agency to identify activities that may affect listed species or their habitats and then to initiate consultation with either USFWS or NMFS. In the case where an agency has not identified such a "may affect" situation, consultation may be requested by either service. After a threshold examination has been conducted to determine if a "may effect" situation exists, the appropriate Service issues a biological opinion to the requesting agency. If the consultation and biological opinion conclude that the agency action will harm endangered species or offers reasonable and prudent alternatives that would prevent potential harm, the agency may issue an "incidental take statement," which specifies the impact of the take (number of individuals), delineates the reasonable and prudent measures to be taken, and sets forth terms and conditions under which the activity must be conducted (16 U.S.C. 1536(b)(4)).

The Marine Mammal Protection Act

The third statute applicable to rig removals is the Marine Mammal Protection Act (MMPA) (16 U.S.C. 1361 et seq.). The Act generally places a moratorium on the taking of any marine mammals, but provides several specific exceptions to the prohibition. The exception relevant to the instant situation is found at Section 101(a)(5) of the Act, which allows for the incidental take of small numbers of marine mammals during an activity other than commercial fishing if the proposed take will have a negligible impact on the affected species or stock. The Secretary may issue a permit after he makes a finding of "negligible impact" following a notice and comment rulemaking.

Case Study: Section 7 and Platform Removals in the Gulf of Mexico

More than 4,000 oil and gas production platforms dot the coastal waters of the United

States, most of them in the Gulf of Mexico, where the earliest structures were placed in the 1950's (MMS, 1985). The MMS projects that 2,000 structures will be scheduled for removal over the next 20 years, at a rate of about 60 to 120 per year (MMS, 1987). The waters of the Gulf of Mexico also are home to five species of threatened or endangered sea turtles, six species of endangered whales, and numerous protected marine mammals.

Given the 25- to 30-year average lifespan of offshore oil and gas structures, many of those in the Gulf are presently abandoned or targeted for abandonment and removal. Removal generally is accomplished by use of explosives, which are used to sever the well conductors and pilings anchoring the legs. Since all parts of the structure must be removed to 15 ft (4.6 m) below the ocean floor, other removal techniques, such as cutting by divers, have been found to be either too dangerous or ineffective. Attention was drawn to platform removal practices when it was made clear that several species of endangered sea turtles use as feeding grounds the highly productive shallows off the Texas-Louisiana coasts–an area that is home to most of the oil and gas production platforms in the U.S.–and that the type of explosions used in removals could injure or kill turtles in the area.

Chronology of Events

In the spring and summer of 1986, the NMFS reported unusually large strandings of marine turtles, mammals, and fishes along the upper Texas and southwest Louisiana coasts. The agency, which documents strandings, noted in reporting the event that some of the strandings occurred during a period when the offshore petroleum industry was engaged in using explosives to remove platforms no longer in production. The Service expressed in internal memoranda particular concern over the presence of large numbers of the extremely endangered Kemp's ridley sea turtle (NMFS, 1986). After inquiries, the agency drew a connection between the strandings and rig removals in the Gulf and initiated an informal consultation with the MMS (NMFS, 1986). The agency also conducted experiments in cooperation with one company removing a rig and determined that, in fact, turtles in the vicinity of underwater blasts would be killed or rendered unconscious depending on their proximity to the explosion (NMFS, 1986).

In July, conservation groups contacted both MMS and NMFS to determine whether formal Section 7 consultations would take place and under what permitting authority the lethal experiments had been conducted. After determining some irregularities in the permit and discovering reluctance on the part of both agencies to initiate a formal Section 7 consultation, one organization contacted several oil companies planning rig removals in the Gulf and requested that they delay removals until a formal consultation could take place.[2] Two of the three companies planning imminent removals postponed them in response to the requests. The President's Council on Environmental Quality (CEQ) called a meeting on August 27, 1986, so interested parties could discuss the issues. A week before that meeting took place, the MMS Gulf of Mexico OCS Region Office requested operators in the Gulf to give advance notice of platform removals in order to facilitate a cooperative monitoring program by MMS and NMFS (MMS, 1986).

Representatives of the Offshore Operators Committee, a group representing oil and gas companies operating in the Gulf; the National Ocean Industries Association; explosive contractors; Department of the Interior, including Minerals Management Service, Fish and Wildlife Service, and Office of Environ-

mental Program Review; Department of Commerce, including National Oceanic and Atmospheric Administration and National Marine Fisheries Service; the Army Corps of Engineers; the Center for Environmental Education; and Greenpeace met at CEQ. Both industry and the MMS continued to express reluctance to initiate a Section 7 consultation of any type, while the NMFS indicated its willingness to continue with informal consultation, evaluating each removal on a case-by-case basis. Representatives from the public interest groups expressed the view that initiation of the formal consultations was no longer a discretionary matter, but a requirement of the ESA. The MMS maintained that there was insufficient evidence to connect the turtle strandings with platform removals using explosives, and industry representatives stated their concern that Section 7 consultations would cause delays and might in fact inhibit the gathering of data needed to determine whether rig removals actually did pose harm to endangered species.

Although the meeting ended inconclusively, a week later the MMS notified the NMFS that it had concluded that a "may affect" situation existed for endangered and threatened marine turtles during platform removals involving explosives, and requested that (1) the issue of platform removal be included in an upcoming Gulf-wide consultation preparatory to scheduled lease sales and (2) that expedited formal consultation take place in response to each identified platform removal on a case-by-case basis. The NMFS concurred in the finding. The two agencies met several times over the next few months, hammering out a set of guidelines for conducting the consultations and identifying procedures and techniques for gathering and exchanging data, advance notification on removals, monitoring, and mitigation.

Expedited Section 7 Consultations

The first consultation under the expedited regime was initiated by MMS after Cities Service sought approval on November 10, 1986, to use explosives in a platform removal. The MMS findings, after reviewing the proposed removal plan, were forwarded to the NMFS on November 19. By November 25, NMFS had prepared a 14-page biological opinion with a "no jeopardy" conclusion, proposed mitigating measures to reduce the likelihood of injury or death to sea turtles, and specified an incidental take of one Kemp's ridley and one loggerhead turtle. As the Act requires in such a statement, reasonable and prudent measures were delineated. These included sonar scans to determine the presence of turtles in the platform area, use of scare charges, delay until sea turtles observed in the vicinity had vacated, staggering of charges, postdetonation underwater inspections by divers, and a summary report. The platform removal was conducted according to the stipulated conditions and without incident (Montanio, personal communication, 1987).

The second consultation was requested on January 28, 1987, for removal of a Pennzoil platform in Federal waters off Louisiana. In this removal the company also proposed testing an embrittlement technique using liquid nitrogen followed by mechanical impact. On February 26, the NMFS issued a biological opinion with a "no jeopardy" finding. The reasonable and prudent measures specified in the incidental take statement, in addition to the same conditions imposed on the Cities Service removal, included a stipulation to use the embrittlement technique on all four pilings if it proved successful in the test.

The third consultation took place for removal of a damaged well conductor offshore of Galveston Bay, Texas. Exxon

requested approval to use explosives on January 16, the consultation was initiated by MMS on February 25, and the biological opinion was issued by NMFS on March 27. By this stage, the agency began incorporating by reference the data and findings it had developed in the first two consultations, and the "no jeopardy" finding and incidental take statement had taken on the form they were to reflect in the following months for more than 20 applications from companies proposing to use explosives to remove platforms.

The length of time between the date of the request from the companies to the issuance of the biological opinion since then has ranged from as short as 7 weeks to as long as 33 weeks. Most of the consultations have taken around 20 weeks from initiation to completion. In most cases, the companies have requested approval far in advance of the planned removal date, so the development completion of the biological opinions has not significantly delayed actual removal of some platforms (Montanio, personal communication, 1987). However, oil companies point out that only 10 platforms were actually removed from September 1986 to mid-October 1987, a period when 96 proposed removals were pending, and that of 77 approvals issued between September 1986 and October 1987, 65 were not issued until after June 30, 1987.

Where the first three biological opinions went into some detail, subsequent documents, by incorporating the prior information, have summarized in four pages the finding of "no jeopardy," the incidental take statement, and the conditions for use of explosives. Those conditions at present appear to be standardized as follows:

1. Approved NMFS observer monitoring prior to, during and after detonation on charges.
2. Delay of detonation until any turtles observed in the area (within 1,000 yards [914 m]) can be removed.
3. Detonation only during daylight hours.
4. Pre- and postdetonation surveys by divers, including recovery of any injured or dead turtles.
5. Staggered firing of charges.
6. Submission of a summary report.

Additional conditions that have been required, depending on particular circumstances of the rig location, size, and structural characteristics, have included aerial surveys before detonation and the use of acoustic devices to monitor shock amplitude and impulse. The required use of sonar scan was dropped early after it was determined to be ineffective in confirming the presence of turtles in an area. In those removals where the likelihood of turtles in the vicinity was very low, or where the size of the charges to be used was small, the aerial survey requirement has been waived, and the timing requirement has been relaxed from limiting detonations to within two hours after sunrise/before sunset to one hour after sunrise/before sunset.

Concurrent with the expedited consultations, the MMS began work on a programmatic environmental assessment (PEA) to address the general question of structure removals and to assess in one background document the spectrum of potential impacts associated with the removal of structures (MMS, 1987). While the PEA incorporates the measures that have been developed in the course of the case-by-case consultations, it also provides that specific environmental assessments should be per-

formed for specific structure removals, using the PEA as the principle reference document (MMS, 1987).

Present Situation

By early November, one biological opinion was yet pending on a consultation initiated in September by MMS. The NMFS and MMS are reviewing the consultation procedures and requirements set out in the incidental take statements in an effort to become yet more flexible in their approaches to reasonable and prudent measures. For example, the agencies are considering allowing around-the-clock removals if a 48-hour preblast survey indicates there are no turtles in the area or if they can develop means to detect turtles at night. They also are reviewing potential avenues of research inquiry that will directly address the platform removal issue—for example, an assessment of distribution and abundance of the various species, the correlation of turtle sightings with specific rigs, methods for scaring turtles from the vicinity of a planned blast, or nonlethal alternatives to the use of explosives in the removals.

In the case of the association of turtles with rigs, it is now postulated by NMFS scientists that loggerhead turtles may actually be resident at specific structures (Henwood, personal communication, 1987). While no hard evidence exists to confirm this, a review of existing information suggests a strong correlation. If such a relationship could be confirmed, the agencies could use different removal approaches for those rigs that are known to have resident turtles and relax requirements for those known not to have resident turtles.

The other recent development in the removal process is the planned application by several oil companies for a "small take exemption" under Section 101(a)(5)(A) of the MMPA. Heretofore, each incidental take statement specified that it did not cover the taking of protected marine mammals. While the chance that dolphins might be in the vicinity of the platforms without being observed is very small, it has been suggested that the offshore operating companies might apply for the small take exemption permit to avoid any liability for incidental takings of marine mammals during platform removals (Montanio, personal communication, 1987). If such a permit is applied for, it would have to go through the notice and comment rulemaking process described above.

Finally, a Gulfwide, formal Section 7 consultation was initiated on January 13, 1987, preparatory to proposed Lease Sales 113, 115, and 116. Structure removals were included as part of the entire consultation on impacts of the proposed sales. Until the NMFS issues a biological opinion on removals using explosives, the expedited, case-by-case consultation will continue (MMS, 1987). The NMFS has said it cannot make a conclusion with regard to generic platform removal stipulations until more information is gathered or until industry develops nonexplosive cutting technology that can be widely applied. Therefore, biological opinions and review of platform removal proposals will have to continue through the expedited, case-by-case procedure (Creel, personal communication, 1987).

Discussion

As in any environmental issue, the players in the turtles and rigs event quickly chose numerous adversarial roles. The interests, however, were not as simple as "industry vs. environmentalist" or "industry vs. government." Here was a case where more than one element of a large and diverse industry was

involved: actual owner/operators of the platforms were required to remove the rigs, yet also were required to comply with the ESA, while marine demolition companies, traditionally on the same "side" as the offshore operators, found that they would suffer substantial economic harm through the delays. The government, too, found itself with different interests: the MMS had to go forward with an activity in fulfillment of a regulatory requirement for platform removal, while both MMS and NMFS were obligated to fulfill their respective duties to protect endangered species. Even the environmental community had competing interests. The discovery that rig demolitions might be related to turtle deaths was made while conservation groups were locked in intense negotiations with government and the shrimping industry predicated on the fact that shrimp trawls were principally responsible for the continuing decline of endangered marine turtle species. The rig removal controversy was cited by shrimpers as proof that they were not the sole cause of the population declines. Even Rigs-to-Reefs advocates were not quite sure on which side to ally themselves: would the Section 7 consultations delay or inhibit the use of structures as artificial reefs?

The controversy that resulted when conservation organizations invoked the ESA began with many interests taking hard-line positions at opposite ends of a spectrum. Yet accommodation ultimately was reached. Platform removals resumed, no turtles have been known to be harmed, and the requirements of the law appear to have been met. On the downside, however, were the economic consequences for companies that actually conducted the demolitions of platforms in the Gulf and were delayed in realizing the income attached to that activity. In some cases, the oil companies had to wait months to proceed with removals of platforms for which they continued to assume liability. For the conservation community, however, the most important result was that implementation of procedures set out by law has demonstrated that the ESA actually can be made to work not only to protect endangered species, but also to allow the continuation of activity in areas where endangered species occur. While most of the parties involved agree that the process was somewhat slow in getting started, they concur that it is working, and cooperation on all sides has been commendable.

As mentioned above, concurrent with the exploration of the relationship between explosive removals and large strandings of marine animals, the MMS was engaged in seeking comment on revising its regulations as they applied to platform removals. At least one commenter suggested inclusion of advance notice and other elements of the MMS/NMFS guidelines in the final rule.[3] As of this writing, no final rule has been promulgated on the inclusion of the new Subpart I in the agency's regulations set out at 30 C.F.R. 250, and it remains to be seen whether the turtles and rigs controversy will have any effect on the way the final rule requires that platforms be removed.

Also unknown is what the agency will do with the comments it solicited regarding the idea of leaving rigs in place. Since that request for views was not an advance notice of a proposed rule or regulatory revision, the only certainty is that the agency cannot act on the comments until it makes an actual proposal to regulate Rigs-to-Reefs. Indeed, in its programmatic environmental assessment on rig removals, the MMS notes that in order for it to have an option to allow structures to remain in place, regulatory revision would be necessary (MMS, 1987).

In studying the options for use of abandoned platforms, the National Research Council recommended that Interior "adopt a more flexible policy on platform removal, one that allows for case-by-case consideration of what is best in terms of cost, environmental impact, and public benefit."

If there is anything the rigs and turtles controversy has illustrated, it is the aptness of this statement. The recommendation could have been taken from any number of discussions by the conservation groups urging the use of the Section 7 consultation to protect endangered turtles. Such flexibility, if it allowed leaving some structures in place, could serve not only the interests of fishing enhancement and the interest of cutting the costs associated with removals, but also the desire to conserve marine species that have been shown to be adversely affected by the use of explosives in their environments.

The programmatic environmental assessment points out potential impacts associated with the alternative of leaving rigs in place. These include negative impacts, such as the effects on military traffic in the Gulf, hazards to commercial navigation, and the general issue of liability and maintenance on the rigs. These are questions that need to be answered, but right now MMS cannot really ask the questions, since as a matter of regulation, the agency *has no option* to leave a structure in place.

As information is developed in the course of the consultations and over experience with numerous, monitored platforms removals, it could lend support to the Rigs-to-Reefs concept. For example, if certain types of structures emplaced in waters of certain depth are found to be loggerhead turtle resting places, such structures might be candidates to be left in place. However, if a differently located/configured platform was found to have no turtles in its vicinity, removal of such a structure might be able to proceed with more relaxed guidelines for the use of explosives. These kinds of findings, in combination with the safety and liability considerations noted above, could all aid decisionmakers in selecting the best structures for use as artificial reefs.

At present, however, the information gaps are more numerous than the findings, and the regulatory mandate for removal does not allow much room for alternatives.

It is up to the MMS to integrate more effectively its missions of fostering the development of offshore energy and conserving marine resources and its recent policy of encouraging the use of obsolete petroleum structures for fishery purposes by initiating the type of regulatory flexibility urged by the National Research Council.

It is up the NMFS to foster the kind of research documentation that enables selection of particular platforms as artificial reefs or allows their removal by the most efficient and cost effective means. It is up to other government agencies with authority for permitting the use of structures for artificial reef purposes to employ the same flexibility, as well as to recognize that endangered species conservation duties and benefits also can be realized in the process.

As the case study illustrates, there are instances where diverse and contrary interests can come together to resolve conflicts. Alternative options for the use of obsolete petroleum structures may be a case where diverse interests can not only resolve conflicts, but can realize valuable opportunities in marine resource conservation and enhancement as well.

Notes

[1] The OCS Act, though a separate statute, generally is combined with the Submerged Lands Act in a "package" of law governing activities offshore. The latter reserves jurisdiction to the states for the waters and the seabed out to 3-10 miles. Platform removal activity in these state waters is overseen by the Army Corps of Engineers and, while the same principles apply, will not be discussed in detail in this paper.

[2] Center for Environmental Education, 1986. Letters from R. E. McManus to C. Garvin, Exxon Corp., July 31, 1986; to J.L. Ketelson, Tenneco, Inc., and G. M. Keller, Chevron Corp., August 8, 1986.

[3] Center for Environmental Education. 1986. Comments on proposed rules for platform and structure removal in the OCS, from R. E. McManus to D. A. Schuenke, Minerals Management Service. Sept. 15, 1986.

References Cited

Gaines, S. E. and D. Schmidt. 1978. Laws and treaties of the United States relevant to marine mammal protection policy. For Marine Mammal Commission, prepared by the Environmental Law Institute. May, 1978. NTIS PB-281 024. 668 pp.

Minerals Management Service. 1987. Programmatic environmental assessment, structure removal activities, Central and Western Gulf of Mexico Planning Areas. OCS EIS/EA MMS 87-0002. U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 45 pp.

_____. 1986. Letter from W. E. Bettenberg, Director, to W. G. Gordon, Administrator, National Marine Fisheries Service. September 9, 1986.

_____. 1986. Letter from J. R. Pearcy, Gulf of Mexico OCS Regional Office to offshore operators. August 19, 1986.

_____. 1986. Notice of proposed rule for platforms and structure removal in the OCS, Subpart I, 30 C.F.R. 250. 51 Fed. Reg. 9171, at 9316, March 18, 1986.

_____. 1985. When platforms grow old. Fact sheet, Minerals Management Service. Gulf of Mexico OCS Region. 1985. 3 pp.

National Marine Fisheries Service. 1986. Removal of oil platforms by blasting. Memorandum from E. Klima, SEFC, Galveston Laboratory, to J. Brawner, Southeast Regional Director. April 3, 1986. 2 pp.

_____. 1986. Removal of oil platforms by blasting. Memorandum from J. Brawner, Southeast Regional Office, to E. Klima, Galveston Laboratory. April 18, 1986. F/SER23:CAO:dcp.

_____. 1986. Letter from J. Brawner, Southeast Regional Director, to M. Weber, Center for Environmental Education. May 30, 1986. F/SER:CO:svl SER86-121L.

_____. 1986. Letter from Galveston Laboratory to J. Brawner, Southeast Regional Director. July 24, 1986. 6 pp.

_____. 1986. Biological opinion for Minerals Management Service, proposed removal of Cities Service Oil and Gas Corp. Offshore Platform B-1, Galveston Block 144, Gulf of Mexico. NMFS Southeast Region. November 25, 1986. 14 pp.

_____. 1986. Biological opinion for Minerals Management Service, proposed removal of Penzoil Company's Platform A, Vermillion Block 228, Gulf of Mexico. NMFS Southeast Region. February 26, 1987. 24 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Exxon Company's well conductor, Gulf of Mexico. NMFS Southeast Region. March 27, 1987. 5 + pp. F/SER1:AM.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Tenneco Company's Platform A, South Timbalier Block 59, Gulf of Mexico, NMFS Southeast Region. June 1, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Shell Company's Caissons Nos. 1 and 2, West Cameron Block 167, and Caisson No. 1, Sabine Pass Block 14. Gulf of Mexico. NMFS Southeast Region. June 16, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Chevron Co.'s caissons and associated drill casing

strings offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. July 10, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Chevron Co.'s Platform A on Main Pass Block 107, offshore Louisiana. NMFS Southeast Region. July 14, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Kerr-McGee Corp.'s High Island Block 508 A platform, offshore Texas, Gulf of Mexico, NMFS Southeast Region. October 7, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Walter Oil & Gas Corp.'s Platform A, Sabine Pass Block 7, Gulf of Mexico, NMFS Southeast Region. October 6, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Conoco Inc.'s Platform A, Eugene Island Block 217, and four other platforms offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. October 6, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Cities Service Oil & Gas Corp.'s Platform A, South Marsh Island Block 146, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. October 2, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Samedan Oil Corp.'s Caisson B-1, West Cameron Block 67, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. September 29, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Amoco Production Corp.'s Platform A-1, Ship Shoal Block 292. Gulf of Mexico. NMFS Southeast Region. September 29, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Mobil Corp.'s oil storage platform, Eugene Island Block 120. Gulf of Mexico. NMFS Southeast Region. September 22, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Chevron Corp.'s caisson structures and casing stings, Wells 1 and 5, South Marsh Island Block 9, casing string for Well No. 1, Eugene Island Block 42. Gulf of Mexico. NMFS Southeast Region. September 14, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Odeco Oil & Gas Co.'s caissons and associated structures, Eugene Island, Ship Shoal Island. Gulf of Mexico. NMFS Southeast Region. September 14, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Exxon Co.'s Platforms A & C in South Timbalier Block 54, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. September 14, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Union Exploration Partners Platform Union VE 35 No. 6 on Vermillon Area Block 35, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. August 20, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Texaco, Inc.'s caissons and associated structures on South Marsh Block 11, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. August 20, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Exxon Inc.'s Platform A on Mustang Island Block A-90 offshore Texas. Gulf of Mexico. NMFS Southeast Region. August 20, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of CNG Producing Co's Platform A on West Cameron Block 318, offshore Louisiana. Gulf of Mexico. NMFS Southeast Region. August 20, 1987. 4 pp.

_____. 1987. Biological opinion for Minerals Management Service, proposed removal of Chevron Co's Platform A in Brazos Block A-40 and Platform A in Brazos Block A-41 in the Gulf of Mexico. NMFS Southeast Region. August 10, 1987. 4 pp.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. 17 pp.

Statutes and Regulations

Endangered Species Act of 1973, as amended, 16 U.S.C. 1531-1543, Pub. L. 93-205, December 28, 1973, 87 Stat. 884.

Marine Mammal Protection Act of 1972, as amended, 16 U.S.C. 1361-1407, Pub. L. 92-522, October 21, 1972, 86 Stat. 1027.

Outer Continental Shelf Lands Act, 43 U.S.C. 1301-1343, Act of August 7, 1953, 67 Stat. 462.

Office of the Federal Register. 1985. Code of Federal Regulations, Wildlife and Fisheries, Parts 400-499. 50 C.F.R. 400. October 1, 1985.

_____. 1985. Code of Federal Regulations, Mineral Resources, Parts 200-299. 30 C.F.R. 250. October 1, 1985.

Personal Communications

T. Henwood, National Marine Fisheries Service, Southeast Regional Office, 9450 Koger Blvd., St. Petersburg, Fla. 33702

P. Montanio, National Marine Fisheries Service, Office of Protected Species, 1825 Connecticut Ave., N.W., Washington, D.C. 20035

H. Creel, National Oceanic and Atmospheric Administration, Office of General Counsel, 1825 Connecticut Ave., N.W., Washington, D. C. 20035

Ms. Suzanne Iudicello is a fourth year student at the National Law Center of George Washington University and served as a legal associate with the Center for Marine Conservation, a private marine conservation organization. Her legal research for the Center has focused on marine pollution laws and the application of the Marine Mammal Protection Act and the Endangered Species Act to fisheries operations that take protected species of marine wildlife. Prior to embarking on her law degree, Ms. Iudicello was the Chief of Public Communications for the Alaska Department of Fish and Game. Ms. Iudicello is now employed as a specialist in fisheries and the environment in the Washington Office of the Alaska governor.

From Offshore Oil to Offshore Fishing

Dr. Michael D. Zagata
Tenneco Oil and Production
Houston, Texas

In 1982 Tenneco faced the need to dispose of an obsolete oil production platform in the Gulf of Mexico off the coast of Louisiana. Such platforms are normally removed, hauled to shore, and cut up as scrap.

But the beneficial effects of the presence of such structures on marine life has long been known. Offshore platforms serve as steel reefs by providing shelter and support for numerous forms of marine life. Indeed, Japan has long used artificial reefs to enhance marine fisheries.

With this example in mind, Tenneco offered the platform to the State of Florida for use as an artificial reef that would benefit the marine life chain, enhance sports and commercial fishing, and provide researchers a point from which to observe marine life.

Large holes were cut in the structure to facilitate the movement of fish and to provide the maximum possible amount of surface area for barnacles and other marine life. The platform and its support jacket were then lifted on to a barge, towed to a site 20 mi (32.2 km) south of Pensacola, and installed in 180 ft (54.9 m) of water.

The following year Tenneco revisited the site and found it teeming with marine life. Local charter boat operators estimated that 12 to 20 short tons (10.9 to 18.1 metric tons) of amberjack alone had been caught off the artificial reef during the first nine months after it was installed. The project was a success. Tenneco had pioneered the concept of using obsolete oil platforms as artificial reefs.

In 1985, three more Gulf of Mexico platforms were scheduled for removal. The State of Florida requested that they be installed as an artificial reef approximately 1 mi (1.6 km) off the shore of Miami and Ft. Lauderdale. Three platform decks and two supporting jackets were towed 790 mi (1,271 km) to the site. The decks were installed in 100 ft (30.5 km) of water--accessible to divers--and the two jackets were installed in 200 ft (61.0 m) of water to benefit fishermen. The complex is now the largest artificial reef in the United States.

The success of these projects has encouraged Tenneco to seek other ways to make its operations harmonious with the environment. In addition, the company has worked to further the use of artificial reefs. Tenneco supported the U.S. Congress' passage of the Fisheries Enhancement Act of 1985, which encourages the development of additional reefs. The company raised funds for Congressional receptions, testified at hearings, and worked with Congressional staff members to draft language for the bill. The company has supported studies to determine the economic and ecological benefits associated with artificial reefs.

In addition, Tenneco has actively supported the Artificial Reef Development Center, has assisted the Gulf of Mexico Fishery Management Council in studying the red snapper population, and has assisted in experiments to determine whether explosives used in platform removal harm marine life.

Dr. Michael Zagata is Director of Environment and Safety at Tenneco, Inc. He was born and educated in New York, where he gained undergraduate and graduate degrees in the biological and physical sciences. He earned a doctorate in wildlife ecology from Iowa State University. Dr. Zagata has worked as an educator in academia, as an administrator and public relations director for national conservation organizations, and was formerly associated with the National Academy of Sciences.

BLANK PAGE

Early Fish Assemblages on Tenneco II Reef, South Florida

Dr. William Seaman, Jr.
Dr. William J. Lindberg
Dr. Carter R. Gilbert
University of Florida
Gainesville, Florida

Introduction

Nearshore placement of obsolete petroleum platforms in the Atlantic Ocean off Miami-Fort Lauderdale, Florida, in October 1985 afforded an opportunity to document the fish community associated with these redeployed, submerged structures. Five sections of rigs were towed via barges from the northern Gulf of Mexico and placed, at the expense of Tenneco Corporation, approximately 2 mi (3.2 km) off the coast, at depths over 100 ft (30.5 m). The project described here was undertaken to determine the diversity and distribution of finfishes associated with this artificial habitat within one year of placement. A summary of these results is accompanied by observations on improving and understanding the contribution of rigs-to-reefs habitat enhancement.

Although the flora and fauna of actively operating offshore platforms have been described scientifically, no ecological research on redeployed structures has been published or apparently even conducted. Thus, although there is a substantial database for at least certain geographic areas of oceanic oil and gas production, environmental predictions concerning the role of platforms relocated specifically for fisheries enhancement remain unsubstantiated. Such data are essential in making decisions for the whole rigs-to-reefs effort.

The unique nature of this research warranted extensive logistic preparations for data acquisition. This work is reported in more detail in the final report to Tenneco, and additional scientific information (e.g., life history, literature review) is provided in a manuscript submitted for journal publication.

Methods

Intensive field sampling was conducted August 3-7, 1986, using nondestructive techniques to determine abundance and distribution of fishes associated with decks, understory, and supporting jackets at the two shallowest and shoremost locations. Repetitive transects with video cameras were conducted at three depths (60, 80, and 100 ft [18.3, 24.4, and 30.5 m]) and three times of day (first morning light, midday, and last evening light) to quantify fish abundance. At each depth and time, horizontal transects were made linearly along the perimeter of the platform and across its interior, and in a circle at the corners.

An initial site reconnaissance and a later trial of field operations had revealed the physically-demanding conditions likely to be present at the site, which dictated judicious planning. The ocean environment was influenced by reversing and sometimes rapid Gulfstream currents, and repetitive dives had to be planned to 100 ft (30.5 m) to sample all microhabitats.

Analysis of videotapes confirmed our expectation that under varying conditions resolution of different size fishes in the field of vision also varied. Thus, out of the pool of species observed on the rigs, a reduced number (18) were designated for quantification from taped transects. These were forms with distinctive shape or size (for the stage of the life cycle present at this time of year) that could always be recognized at the species or genus level. In this subset 11 forms were

always identified to species. Because of sport and commercial interest in the reefs, 6 fishes were identified as target species for closer analysis of distribution patterns.

An interinstitutional team was assembled for the fieldwork. A commercial dive boat was chartered and positioned over the two rigs in a three-point mooring for the summer study period. Faculty from the dive technology program at Florida Institute of Technology (FIT) coordinated diving, which included surface supply, mixed gas scuba, and oxygen decompression operations. Staff from the Academic Diving Program at Florida State University supervised videography.

Because of needs to minimize costly at-sea time and safely maximize diver bottom time to acquire the desired number of samples, Nitrox gas mixture was used by the scuba divers on repetitive dive schedules. This enabled them to stay longer at depths of up to 100 ft (30.5 m) with no or reduced decompression. (Technical aspects of this part of the project were reported by D. Crosson of FIT to the 1986 annual meeting of the American Academy of Underwater Sciences.)

Data analysis included use of the SAS statistical software package. Analysis of variance techniques on a factorial model was used to test the effect of depth versus time for mean values of fish abundance. Followup pairwise comparisons were made with Scheffe's multiple comparison procedure.

Results and Discussion

A diverse fish fauna occupied the two Tenneco II reefs 10 months after deployment. From combined quantitative and qualitative observations on both rigs, 47 species representing 20 families were identified over the 4-day study period. Five of the six most speciose families are strongly associated with and typical of coral reef and other live bottom communities. Five species each of Labridae (wrasses) and Pomacentridae (damselfishes) were observed, followed by four species each of Pomacanthidae (angelfishes) and the more pelagic and mobile Carangidae (jacks). Three species each of Haemulidae (grunts) and Scaridae (parrotfishes) were observed. This level of diversity was similar to that on nearby shallow artificial and coral reefs close to shore.

From videotapes in which all forms could be identified, the most abundant two species (80 percent of observations) were the blue head wrasse (*Thalassoma bifasciatum*) and the bicolor damselfish (*Stegastes partitus*). Both forms are relatively small as adults and show strong site-fidelity with their habitat. Their abundance is coincident with amount of cover and relief. The latter clearly had established territories and defended them. Virtually all observations of both species were made only at the upper level of the platforms. While one of the platforms had only an upper deck (grated), the other contained decks (solid) at the upper (60 ft [18.3 m]) and middle (80 ft [24.4 m]) levels.

Among the larger and more distinctive fishes that could be recognized on tapes of lower resolution, a high proportion were of sport or commercial interest. Jacks (family Carangidae) accounted for 53 percent of all fishes observed on the seaward rig. The most abundant of all species was the bar jack (*Caranx ruber*); the amberjack (*Seriola dumerili*) also was common. Both are schooling, free-swimming species that are not strongly attached to the reef site, yet presumably they use it as a feeding site.

The next most common families were snappers (Lutjanidae), 24 percent; surgeon fishes (Acanthuridae), 13 percent; and barracudas

(Sphyraenidae), 7 percent. The latter family was represented by one species, *Sphyraena barracuda*. The grey snapper (*Lutjanus griseus*) was the second most abundant species. It predominated at the upper two levels on the rig, while the blackfin snapper (*L. buccanella*) was observed only at the lowest (100 ft [30.5 m]) level and in lesser numbers. Other groups represented by a few individuals, at most, included triggerfishes, angelfishes, and trumpetfishes.

Statistical analysis of the distribution of fishes counted along transects indicated that they are not simply random in time and space. However, it is not possible to specify the exact pattern of variation because of small sample size. Within the constraints of this pilot study, it is possible to discern a trend for target fishes to concentrate at middle depths and to be least abundant near the bottom. Inasmuch as these rigs were deployed on barren sand areas, lower population levels at the bottom might be expected. Also, minimal superstructure on the rigs existed there.

Notably absent from this habitat were groupers, which may eventually colonize the rigs. A follow-on survey could address this. Grunts were uncommon, possibly due to the absence of grassbeds nearby to support nocturnal foraging.

Qualitative observations of fishes off the rig, either in the open water column or on the bottom, were limited to occasional schools of scad (*Decapterus punctatus*). The degree to which scad might use these rigs for a behavioral cue or possibly feed in the vicinity is unknown, but this species certainly provides an abundant source of food for carnivores such as amberjack.

The two studied deck-and-jacket reefs offer a composite of habitats. The top deck (60 ft [18.3 m] deep) resembles an inshore live-bottom system with small, site-attached fishes and large mobile forms wandering in and out. Numerically dominant macro-invertebrates were sea urchins and spiny oysters. Under the top deck is a shaded area occupied by larger forms, including both less mobile species that inhabit the reef full time and free-ranging fishes that spend time away from the rig as well as swimming around its members.

From the standpoint of methodology, the use of Nitrox for scuba operations permitted 50 percent more dives in the repetitive schedule and saved a total of five man-hours of decompression. It was noted that divers on Nitrox were fresher physically after a day of diving. The three-point mooring enabled permanent television transmission lines and surface supply air hoses to be run to the rig. A safer and more technologically sophisticated field effort than might ordinarily be conducted was permitted in this pilot study.

Enhancement of Rigs for Fisheries

Of the rigs deployed off the U.S. it appears that perhaps 0.1 percent have been redeployed as dedicated fish habitat. Two considerations for the future use of rigs in fishery management are available. One is how they might be modified for biological purposes. For example, vast open interior spaces between jackets might be modified by fish aggegating devices of some sort, just as the decks might receive material such as cable coils to provide additional cover for forage species. Actual structure of the rig may influence fish populations, too. In general, the solid deck surface did not contain the diversity and abundance of fishes found on the grated surface. This diversity may have resulted from a combination of factors. The grating afforded more hiding places for small fishes, thereby increasing the

diversity of small species and also food supply for predatory species. Also, openings in the grated surface would permit access to the upper surface for animals living in protected areas under the deck.

Secondly, deployment of rigs should entail ecological guidance on how placement might be directed to provide specific research opportunities. For example, turning one rig on its side–with decking perpendicular to prevailing current–for comparison to an upright unit might enable verification of Japanese observations on nutrient upwelling due to physical barriers rising from the seafloor. With the great potential of the rigs-to-reefs effort, a small investment in research and design offers high returns in terms of long-term fishery habitat enhancement.

Dr. William Seaman, Associate Director of the Florida Sea Grant College Program, chaired the Fourth International Conference on Artificial Habitats for Fisheries in 1987 and is Associate Professor, Department of Fisheries and Aquaculture, University of Florida (UF). Dr. William Lindberg is Assistant Professor in the same department. Dr. Carter Gilbert is Curator of Fishes, Florida State Museum, and Professor of Zoology at UF.

An Evaluation of Rigs-to-Reefs in Fisheries Development

Mr. Joseph M. McGurrin
Atlantic States Marine Fisheries Commission
Washington, D. C.
and
Mr. Anthony J. Fedler
University of Maryland
College Park, Maryland

Abstract

The Tenneco II artificial reef in Florida resulted from the conversion of obsolete offshore petroleum platforms into an artificial reef complex. An evaluation of the Tenneco II project provided information on the efficacy of using obsolete petroleum platforms as artificial reefs for fishery development. The research results are grouped in three sections. The first section investigates the planning and construction of Tenneco II in the light of established artificial reef planning frameworks. In general, the Tenneco II project was developed according to the guidelines in the National Artificial Reef Plan and demonstrated the need for clear and cohesive project objectives when undertaking such public/private cooperative ventures. The second section considers Tenneco II reef siting decisions. The lack of formal siting procedures for the Tenneco II project resulted in some difficulties in determining appropriate locations for the reef structures. Given this need, a system for future Rigs-to-Reefs siting is described in terms of a coastal zone mapping process. The last section examines the socioeconomic implications of Tenneco II including measurements of use and economic values associated with the reef. Overall, local sport fishermen were willing to pay an average of $14.36 per individual for the construction of another reef like Tenneco II. Given the evaluation of Tenneco II planning, siting, and socio-economic benefits, implications for the future use of petroleum platforms as artificial reefs are discussed.

Introduction

Interest in the use of oil and gas structures as artificial reefs (Rigs-to-Reefs) has been encouraged through several demonstration projects supported by the oil and gas industry (Wilson, 1986). These large-scale artificial reefs have proven to be excellent fish habitat. But, while these projects have demonstrated the technical feasibility of deploying obsolete rigs as reefs, there is still a need for a more systematic, integrated approach to Rigs-to-Reefs as part of fishery development.

The present Tenneco II Rigs-to-Reefs study sought to assess fishery development and management information in three main areas: (1) reef planning and deployment; (2) reef siting for the recreational fishing industry; and (3) evaluation of reef use and economic implications for the fishing community.

Methods

The deployment of the Tenneco II artificial reef in the waters of Dade and Broward counties, Florida, presented an excellent opportunity to apply some previously developed planning, siting, and evaluative procedures (Ditton and Burke, 1985; Myatt and Ditton, 1985; Bockstael et al., 1985, 1986) to a specific Rigs-to-Reefs project (McGurrin, Phillips, and Radonski, 1987). Different research methodologies were used to evaluate each of the three major components of the study as follows:

Tenneco II Project	Research Methodology
1. Reef Planning and Deployment	A Case Study of Reef Development Decisions
2. Reef Siting	Resource Planning and Exclusion Mapping Procedures
3. Socio-Economic Implications	Mail Survey

Results

The results of the three phases of research are summarized below in terms of Rigs-to-Reefs as a tool for recreational fishery development.

A Case Study of Project Deployment and Planning

The 920-mi (1,408-km) transportation of three Louisiana platforms to south Florida began on September 27, 1985. On October 3, 1985, the total of two support structures and three platform decks were deployed from the barge at the Tenneco II reef site (figure 1). These structures were placed in depths ranging from 90 to 190 ft (27.4 to 57.9 m) of water and projected to not more than 60 ft (18.3 m) below the water surface (as specified in the permit). The entire reef site area was roughly one mile wide by two miles long. The total cost of the project, though not divulged by Tenneco executives, is believed to have been in the range of $500,000 to $1,500,000.

The deployment of the Tenneco II reef was the result of cooperation and compromise between public and private sector entities. The public sector was represented by the respective county government artificial reef programs. A competition between the two counties for the Tenneco II structures developed during the initial project planning stages, before a compromise was developed. A large reef site was chosen so that both counties could share in the use of the Tenneco II reef. It includes a permitted area that straddles the Broward/Dade county line.

From the private sector viewpoint, Tenneco's aim was to demonstrate the feasibility of the Rigs-to-Reefs concept as a cost effective means of recycling obsolete oil and gas platforms. Rather than use the traditional shore-based disposal of the platforms, Tenneco officials wanted to combine the creation of fishery benefits with the development of alternatives for corporate cost savings in the disposition of platforms. A number of different types of Rigs-to-Reefs options (leave postproduction structures in place, topple on site, etc.) may offer future cost savings for the company (Reggio, 1987), but the type of deployment option used in Tenneco II cost more than traditional disposal. Tenneco holds that tax credits to compensate for the additional costs are a necessary incentive for this type of Rigs-to-Reefs program to be initiated on a broad scale.

Reef Siting for Fishing Industry Development

The second objective of the study was to describe the importance of reef siting in creating an effective artificial reef. Given that formal siting methodologies can aid future Rigs-to-Reefs projects, the Tenneco II project was viewed in terms of "Resource Planning" procedures (McGurrin and Reeff, 1986), which combined factors that maximize the probability of recreational fishing use and minimize multiple use conflicts. The framework of resource planning was based on basic coastal zone mapping procedures (Myat. and Ditton, 1985) that (1) characterize the marine recreational fishing industry on both state and local levels, including identification of specific access facilities such as marinas and boat ramps and

the approximate numbers of private boat fishermen making use of local access facilities; (2) determine priority recreational fishing zones (areas of high recreational fishing use); and (3) identify inappropriate reef siting areas (exclusionary areas) within these zones, including shipping lanes, live bottoms, traditional bottom trawling areas, military warning zones and marine sanctuaries.

When viewed in terms of resource planning information, the location of Tenneco II fits into a framework of maximizing benefits to the recreational fishing industry. Although formal resource planning procedures were not available at the time to guide the project siting, Tenneco officials intuitively chose an area noted for the importance of its recreational fisheries (Broward/Dade, Miami area). The reef site lies well within a major area of high recreational fishing use; adding to its attractiveness was the fact that exclusionary areas (marine sanctuaries, shipping lanes, etc.), identified as potential use conflict areas not suitable for artificial reef development, did not apply in this case.

Tenneco II Use and Economic Implications

The purpose of the socio-economic survey was to examine angler use, perceived fishing quality, and economic value of Tenneco II and other reef fishing areas in Broward and Dade county waters. A few of the findings are highlighted below.

Survey results showed that 46 percent of the saltwater boat fishermen in the survey had spent at least "some" time fishing over artificial reefs in the study area. A somewhat smaller percentage of the sample, 41 percent, reported that they had fished over natural reefs. About 12 percent of all boat fishermen in the sample reported using the Tenneco II reef during the previous year.

Using the above information on artificial and natural reef fishing participation, anglers were classified into two groups: (1) artificial reef fishermen – those who had fished at least part of one trip at an artificial reef during the previous year – and (2) nonreef fishermen – those who had not fished at an artificial reef during the previous year. Reef and nonreef fishermen were asked to rate the fishing quality at various artificial and natural reef locations.

Fishing quality ratings for all artificial reef and natural reef locations were not significantly different between artificial reef and nonreef users except for the Tenneco II site (table 1). Reef users rated the Tenneco II reef higher in quality than nonreef users.

Artificial reef users and nonreef users also were asked to compare specific quality attributes of the Tenneco II reef as compared to other fishing locations (table 2). There were no significant differences between reef and nonreef users, except for ratings on two catch-related attributes. Reef fishermen felt that both the size and types of fish that could be caught at Tenneco II were better than at alternative sites.

Finally, anglers in the survey were asked to indicate how much they would be willing to pay for the construction of another reef similar to the Tenneco II reef. Overall, fishermen were willing to pay an average of $14.36 for another reef like the Tenneco II reef. As would be expected, artificial reef users were willing to pay more ($19.38) than nonreef fishermen ($10.00) for another artificial reef site. It is interesting to note that nonartificial reef fishermen indicated some willingness to pay for artificial reef development. This support may be based on beliefs that reefs may reduce crowding on traditional fishing grounds by providing new fishing areas or may be helpful to the fishery

resource and provide more and better fishing in the future.

Discussion and Implications

Overall, the development of Tenneco II demonstrated the importance of public-private cooperation in developing future Rigs-to-Reefs programs. Broward and Dade counties, the State of Florida, the U.S. Army Corps of Engineers, local governmental officials, and the private sector, all made a special effort to facilitate the deployment of the reef. The planning of the project was efficient in terms of overcoming many of the obstacles in artificial reef development (permitting delay, liability concerns, etc.) and generally paralleled planning guidelines available from the National Artificial Reef Plan (U.S. Dept. of Commerce, 1985). The difficulties that occurred in the project were mostly centered on the site selection.

Because the specific site choice came out of a series of public and private sector negotiations and compromises, some of the problems associated with the site selection might have been alleviated by referencing formal fishery planning procedures. Although the resource planning and mapping methodologies were not available for the Tenneco II effort, similar siting procedures have since been adopted by the Louisiana Rigs-to-Reefs program. As part of this process, data on the potential of individual platforms as fish habitat, the expected lifespans of platforms (i.e., when production may cease), and various alternatives of rig disposition are merged with fishery development information (access facilities, fishermen use, etc.).

Finally, the Tenneco II experience highlighted the fact that Rigs-to-Reefs projects require extensive funding for construction, maintenance, and management. Industry and government have expressed an interest in supporting Rigs-to-Reefs, if they can justify the investment (Wilson, 1986). While this study involved only a cursory look at the socio-economic implications of Tenneco II, this kind of knowledge is essential in providing some of the justification for future Rigs-to-Reefs investments.

References Cited

Bockstael, N. E., A. Graefe, and I. Strand. 1985. Economic analysis of artificial reefs: an assessment of issues and methods. Artificial Reef Development Center Technical Report No. 5. Washington: Sport Fishing Institute. 94 pp.

Bockstael, N. E., A. Graefe, I. Stand, and L. Caldwell. 1986. Economic analysis of artificial reefs: a pilot study of selected valuation methodologies. Artificial Reef Development Center Technical Report No. 6. Washington: Sport Fishing Institute. 90 pp.

Ditton, R. B. and L. Bonner Burke. 1985. Artificial reef development for recreational fishing: a planning guide. Washington: Sport Fishing Institute. 68 pp.

McGurrin, J. M. and M. Reeff. 1986. Resource planning as applied to Rigs-to-Reefs siting. In: Proceedings, sixth annual Gulf of Mexico Information Transfer Meeting. OCS Study MMS 86-0073. New Orleans: U.S. Dept. of the Interior, Minerals Management Service. Gulf of Mexico OCS Region. Pp. 109-112.

McGurrin, J. M., S. J. Phillips, and G. R. Radonski (eds.) 1987. The planning, siting, and evaluation of Rigs-to-Reefs: the case of the Tenneco II artificial reef. Saltonstall Kennedy Fishery Development Report. Washington: Sport Fishing Institute. 103 pp.

Myatt, D. O. and R. B. Ditton. 1985. Exclusion mapping for artificial reef site selection to maximize recreational fishing benefits in the Gulf of Mexico. Washington: Sport Fishing Institute. 157 pp.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 17 pp.

U.S. Dept. of Commerce. 1985. National artificial reef plan. NOAA Technical Memorandum NMFS OF-6, compiled by R. B. Stone. Washington: National Marine Fisheries Service. 39 pp.

Wilson, C. A. 1986. Development of an artificial reef plan for the State of Louisiana: a statement of needs. CFI Publication No. 85-37. Baton Rouge, La.: Louisiana State University, Coastal Fisheries Institute. 23 pp.

Mr. Joseph M. McGurrin received a B.S. in biology from the College of William and Mary and an M.S. in fishery science from the University of Maryland. He was formerly associated with the Sport Fishing Institute in Washington, D.C., where he served as Director of the Artificial Reef Development Center. Currently, Mr. McGurrin is Recreational Fisheries Coordinator for the Atlantic States Marine Fisheries Commission.

Mr. Anthony J. Fedler is Assistant Professor, Department of Recreation, University of Maryland, College Park, Maryland. Mr. Fedler has worked on the socioeconomic aspects of all types of recreational fisheries. As a graduate student under Dr. Robert Ditton at Texas A&M University, Mr. Fedler coauthored several papers on the use of petroleum platforms as fishing sites off the coast of Texas.

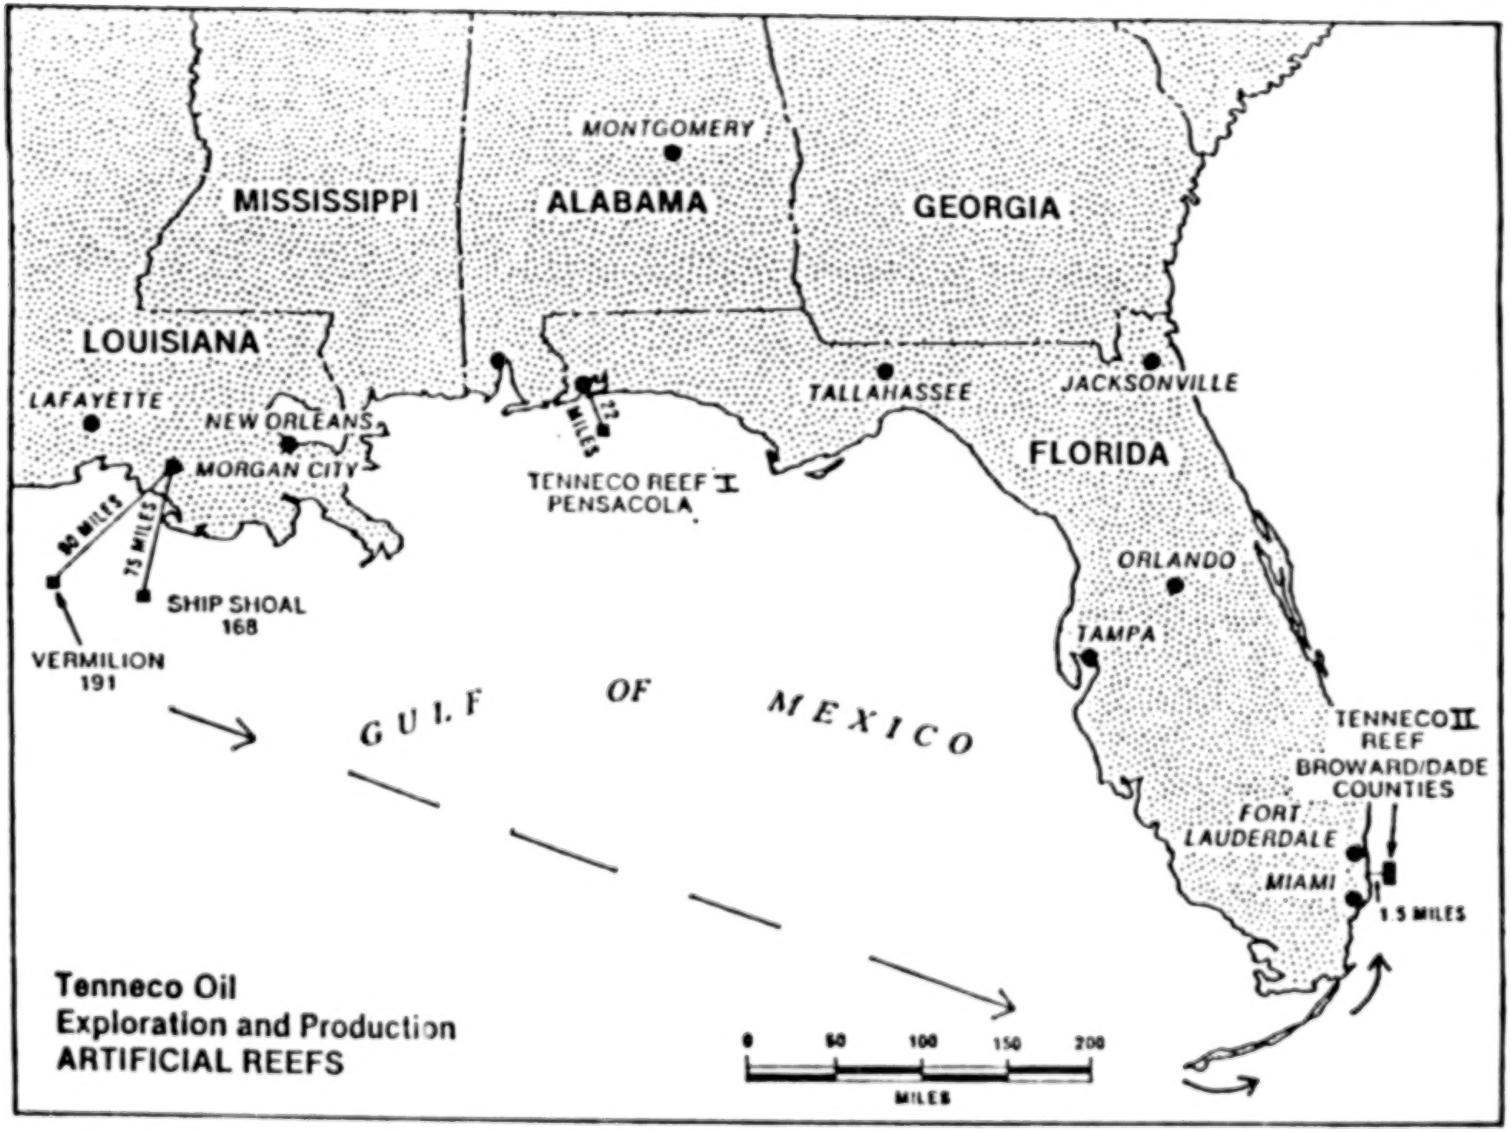

Figure 1. Transportation of obsolete platforms to Tenneco II reef site.

AS SUBMITTED BY AUTHOR

Table 1

Artificial Reef and Nonreef Angler Ratings of Fishing Quality at Various Fishing Locations and Areas

Reef Locations or Areas	Mean Rating* Artificial Reef Fishermen	Nonreef Fishermen	Prob.
Artificial Reefs South of Haulover Cut	3.1	2.8	ns
Artificial Reefs North of Port Everglades	3.1	2.9	ns
Mercedes Reef	3.0	2.8	ns
Tenneco II Reef	3.2	2.8	$p < 0.05$
Natural Reefs	3.3	3.2	ns

*Quality ratings were based on a 5-point scale ranging from (1) very poor to (5) very good.

Table 2

Artificial Reef and Nonreef Angler Quality Attribute Ratings at the Tenneco II Artificial Reef Versus Fishing at Other Areas

	Mean Rating of Quality Attribute Comparisons* Artificial Reef Fishermen	Nonreef Fishermen	Prob.
Overall fishing fun	1.69	1.73	ns
Number of fish caught	1.63	1.80	ns
Size of fish caught	1.63	1.91	$p < 0.05$
Types of fish caught	1.68	2.00	$p < 0.01$
Crowding while fishing	1.94	2.0	ns
Distance traveled for fishing	1.97	2.01	ns

*Quality rating comparisons between Tenneco II and other fishing sites were based on a 3-point scale consisting of (1) Better at Tenneco II, (2) No difference, and (3) Worse at Tenneco II.

Mariculture on Offshore Oil Development and Production Platforms

Dr. Robert P. Meek
ECOMAR, Inc.
Goleta, California

Background

ECOMAR, Inc. is a marine consulting firm specializing in field oceanographic and marine biological studies over the past 13 years.

For the past 8 years, we have been developing ocean farming (mariculture) on offshore development and production platforms in the Santa Barbara and Catalina Channels.

Introduction

The predominant fouling organism occurring on California offshore oil production platforms is the mussel *Mytilus* spp. This shellfish, closely related to the oyster, scallop, and clam, is responsible for 80 percent of the growth on underwater platform structures. This prolific and abundant fouling "pest" is a gourmet food item, presently under intensive mariculture in at least 10 countries worldwide. Mussels are extremely efficient energy converters, capable of producing over 400,000 lb (181,440 kg) of delicious meat per cubic acre per year. Since the oceanographic climate in California and the configuration of offshore oil production platforms provide some of the most optimal conditions for mussel growth, we have been developing this resource to produce a viable, new mariculture industry and economic resource. There are significant advantages to the operators, advantages which not only include food production but also the eventual elimination of platform biofouling cleaning costs, new platform permit mitigation, enhancement of the public image of these offshore structures, and the potential elimination or delay of costly postproduction platform removal.

Current Operations

ECOMAR, Inc., has spent many hours over the past years studying the biofouling patterns on offshore platforms for operators in the Southern California Bight. These studies were the genesis of our mariculture program.

Through research we have found that the succession of fouling animals on newly installed or recently cleaned platforms progresses in a predictable manner. The first hard growths are barnacles and certain calcareous worm tubes. These encrustations are followed by *Mytilus edulis*, the bay mussel. These mussels form a homogeneous coating two to four individuals thick within six to eight months after platform installation or cleaning. As time progresses, these initial settlers are outcompeted by the larger and more hardy mussel species, *Mytilus californianus*. These eventually form very thick fouling growths one to two or more feet thick and eventually become overgrown with anemones and other epizoic hard and soft growths.

Our present operations consist of removing mussels *Mytilus edulis* (when they reach the appropriate size), processing, sorting, and bagging for immediate distribution.

All of the equipment required for harvesting, sorting, and bagging is situated on the lower platform walkways and boat landings. The systems use rig air (150 lb per square inch [68.0 kg/6.5 cm^2], 50 cubic ft [1.4 m^3] per minute) except for a self-contained, diesel-powered, dive air compressor. Divers scrape the year-old mussel accumulations from all of the major members of the platform. As the accumulations are dislodged, they are

conveyed to the surface by a large suction hose. They exit this system and are run through a cleaning and sorting machine. After a final hand-sorting, the mussels are bagged and placed in a 3,000 lb (1,360 kg) gross weight transfer bin. The bin and the crew of six are transported to and from the platforms by regular crewboat runs.

Current production averages 10,000 lb (4,536 kg) per week and, while distribution is primarily centered in California, we also distribute to Washington, Arizona, and to Chicago. The success of the program is volume and efficiency dependent. Current production levels of 40 to 50 bushels (1,410 to 1,762) per day are marginally profitable. Various forms of automation are currently under investigation.

Through years of testing, we have had all of the platforms on which we operate certified by the California State Health Department as shellfish-growing areas.

Under our present arrangement with the operators, we are contracted to maintain the platform's underwater surfaces at a low level of fouling. This is essentially an open-ended term, continuous platform-cleaning contract with no cost to the operator. These contracts have specific performance criteria (e.g., no more than eight inches of growth shall accumulate at any time on more than 50 percent of the subsurface structure; photo/video tape inspection of specified support members is provided to verify and track fouling conditions).

This now-viable program produces approximately $50,000-75,000 of shellfish per platform every 16 to 20 months.

We are continuing to expand the potentials for the role of offshore oil and gas structures in mariculture by developing caged (tray) culture techniques for oysters, scallops, and clams. The latter two are in the development stages and still require research and development. Oysters, however, are a viable immediate addition that we are pursuing at present.

Over the past two years we have evaluated three species of oysters and tray culture techniques on one of our mariculture platforms. After evaluating growth rates, depth requirements, and markets, we have settled on the Pacific oyster *Crassostrea gigas*. This species grows to market size in about the same time as the mussels (14 to 18 months). We have planted approximately 150,000 seed in trays and will, in the coming year, out-plant approximately 100,000 more. Our goal is to have one million oysters in culture by the middle of 1990.

Expectations for 1990 are 15 platforms producing 1.5 million lb (680,400 kg) of shellfish annually. At these levels the platforms will produce a significant portion of the region's seafood.

The fisheries value of the platforms under mariculture is growing steadily, and their future potential is very significant. We now produce over 90 percent of the fresh live mussels grown in the entire state of California. Nationwide, the platforms account for approximately 10 percent of all mussels commercially harvested or cultured.

Locally, our current production represents a large fraction of the mollusc species landed. With the continued growth of our mariculture operations and the declining commercial fish catch, the platforms, in the not-so-distant future, will be a major factor in the local and regional fisheries.

The present and future value of the offshore platforms in the development of mariculture

in the United States cannot be understated. America's coastal bays and protected inlets, amenable to classical mariculture activities, are either in use or are too polluted. To expand, mariculture must move offshore. Without the offshore oil and gas structures, the development of viable techniques and species amenable to the implementation of open-ocean mariculture would be severely handicapped.

The growth of mariculture and its expansion into the open ocean are imperative if we are to have continued supplies of fresh, quality seafood in the coming decades. The wise use of existing offshore structures will significantly enhance and help ensure the growth of mariculture.

Dr. Robert P. Meek has over 23 years of diving and marine research experience on both the east and west coasts of the United States and in the Gulf of Mexico. He worked with the Smithsonian Institution in association with the Harbor Branch Foundation Laboratories where he was awarded a Presidential Internship to be their Chief Diving Biologist in charge of submersible biological operations. He logged in excess of 200 hours of submersible time to depths of 1,500 feet developing submersible research techniques and conducting biological characterization studies on artificial and natural reefs.

Dr. Meek has acted as Principal Investigator for ECOMAR on over 50 projects. As Program Manager, he has supervised all project phases--proposal development, program and equipment design, field research, data analysis, and biological and oceanographic survey studies throughout the United States. Over the past 10 years Dr. Meek has developed the first viable offshore mariculture operations in conjunction with offshore oil and gas facilities (in the Santa Barbara and Catalina channel locales) in southern California.

He is a member of several professional organizations. Dr. Meek received a B.S. in biology, and an M.S. and Ph.D. in zoology from the University of California at Santa Barbara.

Rigs-to-Reefs as an Alternative to Platform Salvage

Mr. C. Fred Stelzer, Jr.
Petro-Marine Engineering, Inc.
Houston, Texas

Abstract

The current downturn in the offshore petroleum industry, along with the turtle issue curtailing platform removals, has resulted in an opportune time for the Rigs-to-Reefs concept. The author has found an unprecedented interest from both commercial and political viewpoints for the first time since his original introduction to the concept over 15 years ago. Operators are listening carefully to offers that provide alternates to costly platform salvage operations; the Minerals Management Service (MMS) is being supportive of commercial venture ideas involving multiple use of platforms; service companies are excited about the possibility of new industries offshore; and unusual farm-in arrangements have become commonplace. These factors make the approach described in the paper not only possible but economically feasible.

The paper details how under current regulations an offshore platform no longer able to produce sufficient quantities of hydrocarbons to justify the cost of its continued maintenance can economically be left in place. A specific example is given including the expected income and cost.

Current Conditions

Current conditions are ripe for alternate usage of offshore platforms as never before. The reason appears to be primarily the downturn in offshore hydrocarbon activity resulting from the oil price drop of $30/barrel (bbl) to $10/bbl last year. However, several other related and unrelated factors have played an important role in creating the friendly environment.

The downturn has significantly reduced the number of operating drilling rigs (over 4,000 in the early 1980's to well under 1,000 in 1986) and all the associated support companies' business. Boats, offshore catering, helicopters, and whole support industries have had to live with 25 percent of the income they had grown accustomed to, while most of their overhead stayed about the same (i.e., debt service and equipment maintenance). With oil prices down, the operating companies are not only faced with less income but – the important consideration for this paper – many of the existing offshore production platforms have become uneconomical to operate. At $30/bbl, a 500-bbl-per-day platform provides the operator $15,000 per day to pay the pumper, his boat charge, the costs of the required painting and cathodic protection to maintain the structure, the pipeline tariff, the royalties, and costs for production equipment repairs, navigational aids, maintenance, etc., etc.

But at $10/bbl, the cost to operate the offshore platform can be more than the operator is receiving for the oil or gas he is producing. This basic factor has made an unprecedented number of offshore platforms available for salvage. Table 1 lists the 75 platform removal applications current on August 12, 1987. This table leads to the next factor, which has played an important role in enhancing the interest in alternate platform usage.

Turtle Issue

The next factor, which has recently impacted the attractiveness of Rigs-to-Reefs, is what the author has labeled the turtle issue. Much concern, as covered in Klima's work (1987),

has been expressed regarding the damage to the marine life surrounding offshore platforms that occurs when the platforms are removed by conventional explosive techniques. It seems that we have now gone the full circle in which, from an environmental viewpoint, offshore platforms have gone from bad to good. Reggio (1987) has documented the importance of these structures to the present marine ecosystem in the Gulf of Mexico. A dilemma has resulted in that current regulations under which the platforms were installed require that they be completely removed (to five meters below the mudline) within one year after production ceases. On the other hand the National Marine Fisheries Service (NMFS) is obligated to bring charges against anyone who knowingly authorizes or carries out a process that will kill an endangered species. Several protected species are thought to inhabit the submerged protection of offshore platforms. Even of more concern to the author than the damage done at the instant of removal is the loss of the future generations of marine life that will not be born and sheltered in the protective arms of each removed platform.

The dilemma has been effective in slowing down the rush to remove platforms. Some have judged this to have placed an unfair burden on a struggling oil and gas industry. As discussed above, current prices either have made it too expensive to continue to operate the platforms or have decreased the economic life of the production, making removal necessary.

Explosives have been the routine method used in platform removal. Alternate methods are available but are normally much more expensive, and the beleaguered oil industry is hollering "uncle." On one hand, industry income has been reduced to the point where it cannot afford to continue to produce, while on the other hand it is being told it cannot use the cost-effective removal approach it has used for years. This has led MMS, NMFS, and the oil companies to be very interested in any idea that can minimize the cost of ridding themselves of offshore platform liability and possibly leave the structure in place.

Solutions

Recently many smaller oil companies have found it possible to work offshore where in the past it had been too risky or just too expensive. Due to the downturn in business, costs have taken a dramatic fall. The "farm-in" has become routine. It works something like this: Company A has leased an offshore block and received the right from MMS to explore for and produce oil/gas from the submerged lands in exchange for the payment of certain bonus monies to the MMS. Company A may have drilled exploratory wells, set a platform, laid a pipeline, drilled the development wells, and begun production, or it may have only the lease when Company B approaches it and says in essence "I'd like to sharecrop for you." Company B can take over or assume a 100 percent assignment of the property (with MMS approval). In this manner the smaller company can work offshore at a much smaller risk (i.e., the oil/gas field may be already discovered and production facilities in place). On the other hand, the larger company with its larger overheads may not be able to operate the platform, as noted above, and make an acceptable rate of return.

Oil companies are also selling "new but not abused" platforms "as is, where is." In other words, if someone is willing to pay the cost to remove the platform and assume plug and abandonment responsibilities, he can usually have the platform for use possibly at another location at a fraction of the original cost of the structure and equipment.

Whatever the option to conventional platform removal, oil companies are now more inclined than ever before at least to listen. Multiple uses such as Meek's commercial mariculture farming of West Coast platforms (Meek, 1987) are being tolerated by oilmen. In the not-too-distant past, multiple use would probably not even have been considered.

In addition to reuse or multiple use of existing oil/gas production platforms, a surge of interest in placing new structures in the ocean for other uses has been noted (i.e., Davis' Florida offshore casino). Many alternates to oil and gas are economic offshore ventures, but right now under current regulations *no* Federal Governmental agency is available to license these commercial ventures. Much effort has been expended toward this end, but the fact remains that none exists. It is the author's opinion that political/commercial/regulatory/environmental interests are presently tuned in to the desirability of extending the U.S.A.'s development offshore as no time in the past.

Catch 22

If all the above interest is real and if many companies and individuals have attempted to start new industries on offshore platforms in the past, why hasn't it happened? The one element mentioned above, namely that no governmental agency is available to license such ventures, has in the end discouraged these developments. No one has been willing to invest the millions required to start an offshore venture without a written assurance from the government that it is acceptable, and no agency within government has the authority to do so. The MMS can grant leases for mineral exploration/production/related activities but for no other purposes. The U.S. Army Corps of Engineers can grant permits for artificial reefs, but as much as the MMS would like to, it cannot currently allow an offshore platform to remain intact as an artificial reef.

With the above in mind, the author and a group of interested parties developed a scheme by which all parties can be satisfied and a venture other than oil/gas can be carried out on an offshore platform. Actually, the approach is not new; the West Coast mariculture project cited above is an example of how it can be done. The following sections describe a real venture that was carried through to the firm proposal stage.

Sample Venture

The key to a successful alternative (to oil/gas/mineral exploration/production) offshore venture under today's laws in the U.S.A. is to continue to produce oil/gas while also doing the other venture. Multiple usage becomes the *key*. This idea was shared with three MMS Regional Supervisors (Leasing & Environment; Field Operations; and Production & Development) last fall and was encouraged. A group of individuals primarily involved in service companies supporting offshore operations, along with a person sensitive to environmental concerns, a person sensitive to political concerns, and a person with expertise in the alternate venture, was approached by the author. The enthusiasm of this loosely-formed group was enough to dare to approach a major oil company to see if the idea would be seriously received. This major oil company had an offshore complex of two platforms joined by a bridge, which they were expecting to become a candidate for salvage in the near future. The structures are only about six years old. Complete gas production facilities and utilities to support up to about 20 personnel rested on the platform. The 100 MMcfd field had depleted to a noncommerical 1.5 MMcfd production rate and the major oil company could no longer

justify the expense of maintaining the structure and equipment. A presentation of the group's venture idea was made to the major oil company.

In a nutshell, the group proposed that the major oil company transfer the entire property to the group. The cost to the major oil company would be far less than the abandonment and salvage of the platform and wells. The group would continue to produce the small amount of natural gas and sell some to the pipeline and use some for the venture utilities. The group would enhance the existing facilities to serve as a base for scuba diving and fishing. The expected attraction to the public is that the heliport makes the site less than a 1-hour helicopter ride from Freeport. Freeport is already a jumping-off point for many offshore fishing and scuba trips. No longer would the public have to waste a majority of their entertainment time in the long boat ride to clear water and good fishing. Even more attractive is the thought that people would not be seasick when they finally got on location.

The major oil company listened attentively to the presentation. Two concerns were expressed: (1) How could they be assured that future liabilities for their company could be eliminated? and (2) Would it be possible to obtain insurance coverage to handle the tourist and production simultaneously on one offshore platform complex?

After this initial meeting, these two concerns were addressed in earnest. First, it was found that "farm-ins" routinely gained 100 percent of an offshore property. Sometimes the company assigning the property even paid the assignee to take the property as part of the terms of the agreement. The land department of the major oil company had no problem with a 100 percent assignment of the property in question as long as it was to its best interest *and* MMS would look favorably on the assignment. The MMS must be convinced that the new operator is reputable. One key element in this judgment is a $50,000 bond that must be posted naming the MMS as the beneficiary.

The second concern was more easily addressed, as one of the group members is an insurance broker dealing in offshore coverage. This matter was handled by obtaining quotes for the coverage required for the multiple usage.

Shortly after these concerns were addressed, the major oil company allowed the group to visit the site and then, along with several other companies interested in the property, to submit a formal proposal. The next section describes the venture group and its interests.

Venture Group

A broad spectrum of interests makes up the venture group. It was the author's intent to involve individuals with complementary expertise and company affiliation that are necessary in implementing the venture. Dana Larson of The Rigs-to-Reefs Company provides oil/gas experience along with a keen interest in environmental concerns. Jim Shaw of Houston Helicopters is a key member due to the importance of the helicopter in making the venture go. Mike Price of Houston Scuba Academy provides the marketing and alternate venture expertise. John Mahony of Universal Services represents the offshore catering viewpoint. Jerry Deere, Republican Party chairman and chairman of the Rigs-to-Reefs committee of the Brazosport Chamber of Commerce, provides political insight. John Johnson of Oceaneering International is knowledgeable in subsea maintenance and platform salvage. Tom Knapik of Jardine Emett & Chandler

Insurance Brokers gives insight into insurance needs. The author's company, Petro-Marine Engineering, provides the project management and engineering skills necessary for the venture. Finally, Mike Doughty of Occidental Energy Company agreed to be the oil/gas operator for the group. The author's brother John (an oil/gas service company lawyer) provides legal advice.

The group was very excited about the possible venture. When it was formally invited to make its proposal, this excitement turned to the serious business of economics.

Venture Economics

Before a viable offer could be made, it was necessary to carefully examine the realistic costs and project the expected income to the venture. In addition, it was necessary to establish which of the group members wished to be partners in the venture and which only wanted to provide a service to the group. Year 1 expenses and income estimates were developed using the group's expertise. A summary of these projections is given in Table 2. As shown, a $130,000 profit is projected during the first year of operation *if* the major oil company pays the group to take the property off its hands *and* certain group members contribute approximately one-half of the value of their services to the group in payment for a prorated share of the ownership of the venture. The individual contributions and resulting ownership percentage are not indicated for obvious reasons.

The following year's expenses and income are projected in Table 3. As shown, the projected profit continues to be approximately $130,000 each year. When considered as a percent of gross income, the profit is not especially attractive. However, if considered in light of the political, environmental, and public service return, it seems quite attractive to the author.

Summary

This paper presents a method whereby under current laws an alternate commercial venture can be established on an offshore platform. Although the sample venture was unsuccessful (the major oil company decided to relocate the facility to another location for its own use), the exercise showed that such a venture is certainly feasible.

References Cited

"Bar Harbor man to build offshore oil-rig casino." Bangor (Maine) Daily News, July 20, 1987.

"Houstonian seeks to build casino on rig." Houston Chronicle, July 10, 1987.

"Investor may use oil platform as offshore gambling casino." Houston Post, July 10, 1987.

Klima, E. F., G.R. Gitschlag, and M. L. Renaud. 1987. Preliminary findings relating to biological impacts of explosives used in offshore platform removals. 4th International Conference on Artificial Habitats for Fisheries, November 1987.

Meek, R. P. 1987. Mariculture on offshore oil development and production platforms. Ibid.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structure as artificial reefs. OCS Report/MMS 87-0015. New Orleans: Minerals Management Service. 17 pp.

"Texas businessmen plan floating casino." Miami Herald. Friday, July 10, 1987.

Mr. C. Fred Stelzer, Jr. is a structural engineer with Petro-Marine Engineering Inc. His responsibilities include design and project management of the construction and installation of offshore structures. In his 20-year career he has been involved in more than 100 oil/gas facilities projects, which now are in place offshore primarily in the Gulf of Mexico. He received a M.S. in civil engineering from the University of Texas in 1967.

Table 1

Applications for Platform Removal

8/12/87

Company Name	Date Received & Approved	Lease No.	Area Block	Platform Name	Proposed Date for Removal & How	Water Depth
1. Cities Service	9/02/86 11/29/86	OCS-G 3374	GA 144	B-1 (25x25)	11/86 Explosives	48′
2.3 Exxon	11/14/86	OCS 019	ST 54	C (110x95)	3/87 Explosives	65′
3. Pennzoil	12/29/86 2/27/87	OCS-G 2078	VR 228	A (64x72)	1/87 Explosives & Liquid Nitrogen	126′
4. ODECO	1/14/87	OCS 043 OCS 046	EI 88	3 (20x20x20) 4	5/87 Explosives	18′
5. ODECO	1/14/87	OCS 043	EI 88	4 & 9 (20x20x20)	5/87 Explosives	18′
6. ODECO	1/14/87	OCS 043	EI 88	5 (36" caisson)	5/87 Explosives	18′
7. ODECO	1/14/87	OCS 0312	EI 27	4 (96" caisson)	5/87 Explosives	17.5′
8. ODECO	1/14/87	OCS 043	EI 88	8 (48" caisson)	5/87 Explosives	15′
9. ODECO	1/14/87	OCS 043	EI 88	6 (36" caisson)	5/87 Explosives	18′
10. ODECO	1/14/87	OCS 0312	EI 27	9 (96" caisson)	5/87 Explosives	18′
11. Exxon	1/20/87 4/08/87	OCS-G 6168	HI 196	I (48" caisson)	1/87 Explosives	53′
12. Tenneco	1/20/87 6/11/87	OCS-G 2927	ST 59	A (70x70)	Early 1987 Explosives	83′
13. Shell	1/27/87 6/26/87	OCS-G 4390	WC 167	1 (48" caisson)	4/87 Explosives	47′
14. Shell	1/27/87 6/26/87	OCS-G 4390	WC 167	2 (48" caisson)	4/87 Explosives	47′
15. Shell	1/27/87 6/26/87	OCS-G 5072	SA 14	1 (48" caisson)	4/87 Explosives	31′

(continued)

Table 1

Applications for Platform Removal

8/12/87

Company Name	Date Received & Approved	Lease No.	Area Block	Platform Name	Proposed Date for Removal & How	Water Depth
16. Texas	2/03/87	OCS-G 1182	SM 11	1 (84" caisson)	7/87 Explosives & Cutting Torch	71'
17. Texaco	2/03/87	OCS-G 1182	SM 11	11 (84" caisson)	7/87 Explosives & Cutting Torch	71'
18. Texaco	2/03/87	OCS-G 1182	SM 11	48 (66" caisson)	7/87 Explosives & Cutting Torch	71'
19. Texaco	2/03/87	OCS-G 1182	SM 11	14 & 20 (36x36x36)	7/87 Explosives	71'
20. Texaco	2/03/87	OCS-G 1182	SM 11	17 & 23 (36x36x36)	7/87 Explosives	71'
21. ODECO	2/06/87	OCS-G 1983	SS 94	1 (48" caisson)	6/87 Explosives	25'
22. ODECO	2/06/87	OCS 0317	EI 47	9 (48" caisson)	5/87 Explosives	23'
23. ODECO	2/6/87	OCS 064	SS 114	44 (48" caisson)	7/87 Explosives	52'
24. Felmont	2/4/87	OCS-G 3258	WC 81	2 (96" caisson)	3/87 Explosives 7/31/87 Revised No Explosives	42'
25. Kerr-McGee	2/17/87	OCS 0345	SS 29	9 (16.5x16.5)	5/87 Explosives	15'
26. Samedan	2/19/87	OCS-G 3256	WC 67	B-1 (46" caisson)	3/87 Explosives	31'
27. Conoco	2/23/87	OCS-G 2820	WC 36	F (50x51)	5/87 Explosives	30'
28. Conoco	2/23/87	OCS 191	WC 193	D (52x110)	5/87 Explosives	57'
29. Conoco	2/23/87	OCS-G 2880	SM 113	A (50x51)	5/87 Explosives	194'

(continued)

Table 1

Applications for Platform Removal

8/12/87

Company Name	Date Received & Approved	Lease No.	Area Block	Platform Name	Proposed Date for Removal & How	Water Depth
30. Conoco	2/23/87	OCS-G 0978	EI 217	A (65x80)	5/87	109'
31. Conoco	2/23/87	OCS-G 1983	SS 94	A (65x80)	5/87 Explosives	26'
32. Chevron	2/26/87 7/27/87	OCS 0814	SS 108	18 (96" caisson)	6/87 Explosives and Cutting Torch	25'
33. Chevron	2/26/87 7/27/87	OCS 0814	SS 108	24 (96" caisson)	6/87 Explosives and Cutting Torch	25'
34. Chevron	2/26/87 7/27/87	OCS 0814	SS 108	29 (96" caisson)	6/87 Explosives and Cutting Torch	25'
35. Chevron	2/26/87 7/27/87	OCS 0814	SS 108	33 (96" caisson)	6/87 Explosives and Cutting Torch	25'
36. Chevron	2/26/87 7/27/87	OCS 0814	SS 108	38 (96" caisson)	6/87 Explosives and Cutting Torch	25'
37. Chevron	3/11/87 5/15/87	OCS 0814	SS 108	S-93 Production Barge (92x112)	5/87 Re-Float Barge	31'
38. Chevron	3/11/87 5/15/87	OCS 0814	SS 108	S-93 Mooring Dolphins and Flarepile	5/87 Revised 4/29/87 No Explosives	31'
39. Chevron	3/13/87	OCS 0498	ST 128	A (40x148)	7/87 Explosives and Cutting Torch	104'
40. Chevron	3/30/87 7/24/87	OCS-G 1302	MP 107	A (60x70)	6/87 Explosives	52'
41. Exxon	3/30/87	OCS 019	ST 54	A (120x100) A Quarters (30x50)	6/87 Explosives	
42. Exxon	3/30/87	OCS-G 3065	MU A-90	A (70x171)	7/87 Explosives	189'

(continued)

Table 1

Applications for Platform Removal

8/12/87

Company Name	Date Received & Approved	Lease No.	Area Block	Platform Name	Proposed Date for Removal & How	Water Depth
43. Unocal	4/03/87	OCS-G 1299	MP 100	5 (96" caisson)	6/87 Explosives	30'
44. Chevron	4/03/87 7/27/87	OCS-G 1299	MP 100	5 (96" caisson)	6/87 Explosives & Cutting Torch	52'
45. Chevron	4/03/87 7/27/87	OCS-G 1301	MP 106	1 (96" caisson)	6/87 Explosives & Cutting Torch	49'
46. Chevron	4/03/87 7/27/87	OCS-G 1302	MP 107	1 (96" caisson)	6/87 Explosives & Cutting Torch	57'
47. Chevron	4/03/87 7/27/87	OCS-G 1302	MP 107	4 (96" caisson)	6/87 Explosives & Cutting Torch	57'
48. Chevron	4/03/87 7/27/87	OCS-G 1302	MP 107	6 (96" caisson)	6/87 Explosives & Cutting Torch	57'
49. Chevron	4/03/87 7/27/87	OCS-G 1305	MP 112	1 (144" caisson)	6/87 Explosives & Cutting Torch	65'
50. Chevron	4/03/87 7/27/87	OCS-G 1305	MP 112	5 (96" caisson)	6/87 Explosives & Cutting Torch	58'
51. Chevron	4/03/87 7/27/87	OCS-G 1305	MP 112	6 (96" caisson)	6/87 Explosives & Cutting Torch	65'
52. Chevron	4/06/76	OCS-G 4561	BA A-42	A	6/87 Explosives	136'
53. Chevron	6/06/87	OCS-G 4560	BA A-40	A	6/87 Explosives	140'
54. Apache	4/27/87	OCS-G 2610	EI 321	A (95x95)	10/87 Explosives	240'
55. Chevron	4/22/87	OCS-G 1180	SM 9	1 (12" caisson)	6/87 Explosives & Cutting Torch	62'
56. Chevron	4/22/87	OCS-G 1180	SM 9	5 (96" caisson)	6/87 Explosives & Cutting Torch	63'
57. Chevron	4/22/87	OCS-G 4858	EI 42	1 (26" conductor)	6/87 Explosives	13'

(continued)

Table 1

Applications for Platform Removal

8/12/87

Company Name	Date Received & Approved	Lease No.	Area Block	Platform Name	Proposed Date for Removal & How	Water Depth
58. Mobil	4/27/87	OCS 050	EI 120	Oil Storage Platform (100x50)	5/87 Explosives	37'
59. Chevron	5/04/87 6/29/87	OCS 263	ST 21	7/7D Triangular Platform	8/87 Explosives Revised No. Expl.	34'
60. Chevron	5/04/87 6/29/87	OCS 263	ST 21	30/30D Triangular Platform	8/87 Explosives Revised No. Expl.	35'
61. CNG	5/07/87	OCS-G 3802	WC 318	A (40x40)	6/87 Explosives	65'
62. Chevron	5/11/87	OCS-G 5660	GI 86	Penrod Rig No. 61	6/87 Explosives	246'
63. Kerr-McGee	5/12/87	OCS-G 3245	HI 508	A (60x55)	7/87 Explosives	184'
64. Amoco	5/15/87	OCS-G 1042	SS 292	A (72x103)	9/87 Explosives	234'
65. Anadarko	5/25/87	OCS-G 4470 6/05/87	PL 2	A (80x75)	6/87 Mechanical Method	30'
66. Mobil	6/05/87	OCS 0245	WC 72	P-1 (30" caisson)	7/87 Explosives	640'
67. Mobil	6/05/87	OCS 0245	WC 72	G-1 (30" caisson)	7/87 Explosives	30'
68. Mobil	6/05/87	OCS 0246	WC 101	K-1 (30" caisson)	7/87 Explosives	40'
69. Mobil	6/05/87	OCS 0247	WC 102	#18 (30" caisson)	7/87 Explosives	40'
70. Walter	6/26/87	OCS-G 3956	SA 7	A (20x20)	7/87 Explosives	37'
71. CNG	7/09/87	OCS-G 1974	EC 118	#3	9/87 Cryogenic Fracturing	65'
72. CNG	7/09/87	OCS-G 1974	EC 118	#4	9/87 Cryogenic Fracturing	65'
73. CNG	7/09/87	OCS-G 1974	EC 118	#A5	9/87 Cryogenic Fracturing	65'
74. Mobil	7/09/87	OCS 0245	WC 72	#8 (30" caisson)	10/87 Explosives	39'
75. Texaco	7/09/87	OCS-G 5038	EI 29	#2	8/87 Mechanically Cut	17'

Table 2

Venture Economics

Year One Expenses

Operator Bond	$ 50,000
Salvage Annuity	50,000
Renovate Quarters	50,000
Paint Structure	50,000
Fence Production Equipment	20,000
Scuba Ramp to water	10,000
Elevator	20,000
Advertising	40,000
Rigs to Reef Pursuit	21,500
Political/Financial Advice	21,500
Project Management	54,000
Helicopter Transportation	510,000
Baseline Structural Survey	18,750
Catering Expenses	104,400
Insurance Coverage	161,200
Boat Transportation	150,000
Staff (Manager & Hand)	50,000
Legal Fees	25,000
Total Expenses	$1,406,350

Year One Income

Gas Production (net after operator expenses)	$ 120,000
Scuba/fishing	562,500
Food/bedding	180,000
Venture Participation Contribution	421,750
Major Contribution	250,000
Total Income	$1,543,250

Table 3

Following Year's Venture Economics

Expenses

Salvage Annuity	$ 50,000
Expand Quarters (and continuing maintenance)	100,000
Project Management	50,000
Helicopter Transportation	730,000
Catering	210,000
Insurance	90,000
Boat Transportation	200,000
Staff	100,000
Total Expenses	$1,530,000

Income

Gas Production (net after operator expenses)	$ 120,000
Scuba/fishing	1,124,000
Food/bedding	360,000
Rentals	60,000
Total Income	$1,664,000

Rigs-to-Reefs in the North Sea

Dr. Gordon B. Picken
Dr. Alasdair D. McIntyre
Department of Zoology
University of Aberdeen, Scotland

Introduction

At present there are some 150 fixed offshore installations on the United Kingdom (UK) Continental Shelf. About two-thirds are in water less than 131.2 ft (40 m) deep in the southern North Sea and are of light weight, often around 330.6 short tons (300 metric tons). Much larger structures operate in the deep water of the central and northern North Sea. Steel platforms in 607.0 ft (185 m) of water sometimes weigh over 93,670 short tons (85,000 metric tons); and concrete gravity platforms can reach up to 716,300 short tons (650,000 metric tons). In 1987, some fields are approaching the end of their useful lives, and the question of platform decommissioning is being actively discussed. Relevant experience exists particularly from the Gulf of Mexico but relates mostly to small structures in shallow water near the shore, and a very different set of problems must be faced with the larger North Sea platforms. The first of these will be due for decommissioning during the period 1991-1995, and about 60 in the following decade.

Platform Decommissioning

Looking first at international law, the 1958 Geneva Convention on the Continental Shelf provides that exploitation of natural resources must not result in any unjustifiable interference with navigation, fishing, or the conservation of living resources, and requires that any installations that are abandoned and disused must be entirely removed. The 1982 Convention on the Law of the Sea also reflects the principle of no unjustifiable interference with other users of the sea, but spells out in more detail the obligations of user states with regard to the removal of platforms and appears to imply that in some cases less than total removal is envisaged. The UK government attitude is that abandoned installations need be removed only to the extent required to take proper account of the legitimate interests of other users of the sea.

A working group of the International Maritime Organization has been preparing guidelines and standards for the removal of offshore installations and proposes that installations should be removed except where nonremoval or partial removal is consistent with the guidelines. These recommend case-by-case evaluations in which safety of navigation, rate and effect of structural deterioration, benefit to living resources, costs, feasibility and risks of removal, and the possibility of new uses should be taken into consideration. Among the standards, it is proposed that when living resources can be enhanced by leaving structures wholly or partly in place, the appropriate coastal state may so decide, and if such enhancement may be achieved by the placement on the seabed of material from removed structures (e.g., to create artificial reefs) then such material should be placed well away from traffic lanes and should be adequately monitored. In addition to international legislation, UK domestic legislation provides that the site of an abandoned or disused structure shall be cleared "to the satisfaction of the Secretary of State."

It may be concluded that the coastal state may make the final decision on whether and how to remove an installation but must observe a number of constraints. Since on the UK Continental Shelf alone the complete removal of platforms is estimated to cost around $10.2 billion (£6,000 million) at 1984

prices, a careful examination of the options is clearly important.

The Options

Assuming that a platform is no longer required for its original function, there are several relevant options. It may be utilized in situ for some new function such as for marine scientific research, as a center for search and rescue capabilities, or as a communications facility. Among more novel possibilities are the use of platforms for seabed disposal of hazardous wastes or as part of an integrated vessel traffic management scheme. None of these options has been evaluated further because it is unlikely that any non-oil-related use could be sufficiently profitable or essential to warrant the expense of continuing platform maintenance in situ. Alternatively, the platform may be toppled to provide navigation clearance and then left to deteriorate on the seabed. Although this is a cheap option, it may well be unattractive to operators because of continuing legal liability. Partial removal is also cheaper and would involve removal of topsides and the upper part of jackets. Removal material might be put on the seabed alongside the residual 98.4-131.2 ft (30-40 m) high "stub," or it might be transported to land. The final option is to remove the structure completely, either dumping it in deep water, probably off the edge of the continental shelf, or taking it ashore, when parts of it might be salvaged and reused or sold as scrap.

It now seems likely that all the small platforms in the southern sector of the North Sea will be removed completely. If the 40-odd large steel structures in the central and northern sector are partially or completely removed as well, the UK will be disposing of a considerable quantity of durable, high-grade steel, much of it already fabricated into open lattice-work components similar to the steel artificial reefs currently being constructed by the Japanese. It is therefore suggested that we have an opportunity well suited to a UK reef-building program.

Artificial Reefs in the North Sea

The Fishery Potential of Functional Platforms

In the Gulf of Mexico the benefits to fisheries from operational platforms are fully recognized. A growing body of data confirms that installations in the North Sea also attract fish. Norwegian studies have shown that the density of certain fish species was up to ten times greater close to platforms than in areas more than 1,640.5 ft (500 m) away. In addition, a study initiated by the UK Offshore Operators Association and conducted by Aberdeen University Marine Studies Ltd. has involved the analysis of fish activity seen on videotapes from subsea structural inspections. It is clear that fish are associated with all the structures so far examined in the North Sea. Twenty species have been identified; the most common being saithe (*Pollachius virens*), cod (*Gadus morhua*), haddock (*Melanogrammus aeglefinus*), ling (Molva molva), pollack (*Pollachius pollachius*), Norway pout (*Trisopterus esmarkii*), long rough dab (*Hippoglossoides platessoides*), Norway haddock (*Sabestes viviparus*), and wolffish (*Annarchichas lupus*). It is believed that these shoals (fish schools) spend at least some time in the vicinity of platforms and that the prime attraction is the reference point that the structure provides. Shoals appear to be orientated around or within a structure and may move around it in response to the underwater vehicle filming them, but they have never deserted the structure when disturbed.

In an attempt to determine if the operational artifacts of platforms were responsible [illegible]

fish attraction rather than the mere physical presence of an open structure, a second survey was conducted on a completely submerged nonoperational oil installation in about 328.1 ft (100 m) in the central North Sea. Enhanced fish life was also observed there, with the same general pattern of saithe shoals near the top and a greater diversity at the seabed.

It is clear from these observations that the North Sea platforms do attract fish just as they do in the Gulf of Mexico, but it is important to note that the pattern of fishing activity and interests in the North Sea is very different from that in the Gulf. Given the environmental conditions in the North Sea, there is not the same tradition of recreational fishing offshore, and even if that did exist, most of the platforms are too far from the coast and in too turbulent waters for them to offer attractive prospects in this context. Also, since the pattern of fishery in the North Sea is almost entirely commercial, the North Sea fishermen do not see the oil installations as of any help. On the contrary, they regard the oil industry with concern. Floating and seabed debris damage their vessels and gear, losing them valuable fishing time, while the pipelines and platforms exclude them from fishing grounds. The fishermen of the North Sea understood that, when the oil eventually ran out, all the installations would be removed and the grounds would be returned to their original condition. Even if the North Sea platforms had proved to have fishery potential, it should be noted that the oil operators in the North Sea make use of the provision in the 1958 Geneva Convention that empowers states to create 1,641-ft (500-m) exclusion zones (safety zones) around fixed structures. Indeed, even fishing by platform personnel in their off-duty hours is often discouraged in order to protect divers and others working from the structure. In general, then, the prospects for fisheries around North Sea functional platforms are not attractive.

The Use of Abandoned Platforms in situ

The situation would be different after a platform had been abandoned, if only because the statutory safety zone would presumably no longer apply, and fishing operations could be conducted as close to the structure as the fishermen themselves deemed to be safe. A small wreck fishery is carried on around the UK coast, so relevant practice and techniques are not alien to our fishermen. To leave an intact platform *in situ* is not a viable option, however, since the required maintenance would be prohibitively expensive.

The lowest cost option would seem to be either toppling the structure where it stands or removing the topside and leaving the stump. Fishermen are strongly opposed to either of these solutions. Two of their greatest concerns about oil developments have always been the loss of access and the impact of debris. The latter must be accepted as a significant worry, since even the most robust structure abandoned under water will eventually break up and could constitute a source of trouble, possibly over a wide area, damaging gear and interfering with fishing operations well into the future. The question of loss of access, however, is probably less apposite. Calculating even on the basis of a 1,641-ft (500-m) "No Fishing" zone around abandoned or toppled structures, as at present exists around operating platforms, the total exclusion area associated with 40 platforms would represent only about 0.015 percent of the UK North Sea sector, and in general it is difficult to see it as a major problem. Quite apart from the concern of the fishermen about platforms or parts of them left *in situ*, there is the question of the continued liability of the operator—a ques-

tion that has not so far been adequately answered in the North Sea.

In attempting an assessment of the possible advantages of these various options to fishermen, we should note that the main effect would be to attract fish. The observations quoted earlier suggest that about 10,000 fish would be a reasonable holding for a large structure, so with some 40 platforms available, an associated fish population of about 400,000 could be expected. Yet it can be calculated that, taking only the three species cod, haddock, and saithe, the number of individuals over one year old in the North Sea would be of the order of 6 billion. Clearly, even if all the fish associated with the platform were "new" in the sense that they would not exist but for the presence of the platform, the enhancement of the stocks would still be insignificant. Two points may be added: first, that even for a small-scale wreck fishery this enhancement would not be attractive, since most of the platforms are too far from the fishing ports to make such an exercise profitable; and second, that a certain degree of contamination will have built up around the base of most oil platforms, and while the sediments will eventually recover, the situation would not be encouraging for the establishment of demersal fishing close to the installation as soon as oil operations ceased. The conclusion is that most platforms left at their original site far offshore would have little to offer as artificial reefs.

Reefs Constructed from Parts of Platforms

The remaining option is the redeployment of parts of platforms at new sites as artificial reefs, and a large number of matters would need to be considered before such artificial reefs become operational. On the legal side, the Secretary of State has wide powers to control fishing in coastal waters, so at the National level a mechanism is probably in place to produce any regulations required. Local agreements would also be needed to ensure the proper management and operation of the facility, and questions of ownership, legal liability, and navigation would have to be addressed. It is worth noting that although the exercise would be aimed at exploiting fish, the fishing industry may be far from unanimous in supporting it. The offshore section of the industry will not be particularly enthusiastic to see interest directed to coastal areas, and even among the inshore men, the fixed-gear sector would need to come to terms with the claims of the netsmen.

Given that such administrative and management issues can be harmoniously settled, there are still many questions about the layout and effectiveness of the reef. Would the material available be free of contamination so as to ensure taint-free fish? Would it remain intact long enough to be worthwhile without causing debris problems to other fishermen? Would the reef generate its own resident fish populations or would it simply act as an aggregator? What rate of fish take would be appropriate? What gear should be used? In countries like Japan questions of this type have been asked and satisfactorily answered. In the different conditions of the North Sea we need to return to those questions and, with this in view, the possibilities of a pilot reef are currently being discussed that would be designed to answer them. This project is known as SPARE (Scottish Pilot Artificial Reef Experiment) and it aims to establish and quantify the contributions that artificial reefs could make in Scottish waters of the North Sea by attracting fish to an inshore site and regenerating fish stocks and viable fisheries at such sites. It will also demonstrate the reef technology that is required in these inshore waters and will clarify the extent to which platform-related components make suitable reef modules. An

acceptable site has been identified within three miles of the coast; a selection of appropriate reef components has been made, and the overall design of the reef has been agreed. The decision about materials and design were based on our experience and observations of fish behavior around operational North Sea platforms. Negotiations are well advanced towards the financing of the project. With the existing pressure on commercial fish stocks on the Continental Shelf of western Europe, there seems little doubt that a new approach of this sort, which offers distinct promise, ought to be adequately investigated.

Acknowledgements

The study of fish activity around North Sea platforms was supported by the UK Offshore Operators Association and Mobil North Sea Ltd.

Dr. Gordon B. Picken is the Executive Director of Aberdeen University Marine Studies, Ltd. After graduating from Aberdeen University in 1973 with an honors degree in zoology, Dr. Picken joined the British Antarctic Survey and spent 2-1/2 years living in Antarctica studying the ecology of marine gastropods. This work was completed at the survey's Cambridge headquarters, and in 1979 he returned to Aberdeen as a research fellow working on the fouling of oil platforms. This research led to the formation in 1981 of Aberdeen University Marine Studies Ltd., which provides research and consultative expertise in the field of coastal and offshore biology. Dr. Picken became general manager in 1984 and executive director in 1985.

Professor Alasdair D. McIntyre is a native of Scotland who spent his professional career working at the Aberdeen Marine Laboratory (Fisheries). Early in his career he established his reputation in benthic ecology. From there he went on to play a major role in European research on the effect of marine pollution on fisheries. His career culminated in the position of Director of Fisheries Research Services (Scotland) and Coordinator of Fisheries Research and Development (UK) from which he retired in 1986. He is now Professor Emeritus of fisheries and oceanography at Aberdeen University and serves as chairman of the United Nations working group on the state of the marine environment. Professor McIntyre has published on the ecology of marine benthos, and more recently, on various aspects of marine environmental quality.

BLANK PAGE

Artificial Reef Observations from a Manned Submersible Off Southeast Florida

Mr. Eugene A. Shinn
U.S. Geological Survey
Fisher Island Station
Miami Beach, Florida
and
Mr. Robert I. Wicklund
Caribbean Marine Research Center
The Bahamas

Abstract

Examination of 16 artificial reef structures with a two-person submersible in depths ranging from 98.4-393.7 ft (30 to 120 m) indicated that the highest numbers of fish are found around reefs in water shallower than 150 ft (46 m). Fewer fish, especially those with tropical coral reef affinities, below 150 ft was probably caused by a thermocline, observed on all dives deeper than 140 ft (43 m). During 4 days in September 1987, temperatures from the surface down to approximately 140 ft were 86°-88°F (30°-31° C). whereas below 140 ft the temperature dropped as low as 51°F (10.6°C) at 390 ft (120 m). Algae and reef community encrusters (gorgonians, bryozoans, branching sponges, and corals), abundant on shallower structures, were absent below 150 ft.

Structures that penetrated above the thermocline, such as two upright oil "rigs" and a hopper barge, were also effective reefs. The open structure and high profile of the rigs enhance their use as artificial reefs by providing a range of well-aerated habitats. Any effect of substrate or postdeployment age on fish abundance could not be documented. Wood appeared to be a more effective fish-concentrating material but has a shorter useful life than does steel. The greatest diversity and numbers of fish were observed at the Miami sewer outfall.

Introduction

Numerous derelict ships and other material have been placed off southeast Florida for the purpose of enhancing fish stocks and sportsfishing. These artificial reefs, in water depths ranging from 98.4 to 393.7 ft (30 to 120 m), provide an excellent opportunity to observe the relative effects of depth, temperature, substrate, and postdeployment age on local fish populations. Knowledge gained from study of selected reefs from a range of depths and on different substrates could provide information useful for management and future placement of artificial fishing reefs. In addition, the effectiveness of various kinds of materials and structure shapes could be assessed in such a study.

A research submersible capable of diving to 1,312 ft (400 m) was used to examine reefs as deep as 393.7 ft (120 m). For this short (September 7-10) study, we developed a "quick and dirty" assessment technique (video profiling) that allowed the examination and comparison of 16 separate reefs and a sewer outfall (figure 1). The study does not employ statistical manipulations, nor does it attempt to determine species composition and species-depth relationships. Population density and composition around various structures were estimated from video records made during submersible dives. Visual observations and impressions apart from the video data, however, are considered equally useful for the purposes of this study.

The structures examined included portions of five obsolete offshore oil production platforms (known locally as the Tenneco rigs), 10 ships, a barge, discarded service station storage tanks, and a sewer outfall. Two of the ten ships were composed of wood. The remaining structures, except for the sewer outfall, were composed of steel. The sewer

outfall consists of an elongate mound of rock rubble covering a large trunkline that feeds four vertical effluent outlets approximately 3.3 ft (1 m) in diameter and extending 11.8 inches (30 cm) above the main trunkline. Although one does not ordinarily consider sewer outfalls as artificial reefs, this one was included because it concentrates both fish and fishermen.

The words "concentrate" and "congregate" are used to describe accumulations of fish, whether the fish are drawn in from a broad area or are spawned directly at the reef site. Separating attracted fish from locally spawned fish is a difficult research problem not treated in this study.

Methods

The evaluation method consisted of identical, continuous video transects conducted at all sites. The "video sweeps" were made with a hand-held 8-mm video camera inside an underwater housing equipped with a wide-angle lens and positioned against the starboard porthole. Two kinds of video sweeps were conducted, always in a clockwise direction. The first base sweep was along the bottom with the contact between ship and substrate approximately in the center of view. The ship's hull forms the backdrop; thus, all fish seen were between the submersible and ship. The second deck sweep was around the deck with the top of the deck approximately in the center of view. The submersible was kept about 26.3 ft (8 m) from each target structure during sweeps, but because of debris and dangling lines, uniformity of distance was not always maintained. Deckline sweeps were especially difficult because the deck on most cargo ships seldom falls on a common horizontal plane. Some ships, such as the *Star Trek* or the hopper barge, were lying on their sides; thus, a true deckline sweep could not be made. Instead, the most horizontal side of the ship or barge was treated as the deck. Many of the fish were beyond the deckline; thus, observations are nonuniform because an unknown sample volume is involved. The clearer the water, the greater the number of fish that might be counted. The species found in open water above and beyond the deckline were often different than those around the baseline. Underwater photographs of selected sites are shown in figures 2-4.

Base sweeps of the Tenneco rigs presented a problem because the rigs touch bottom only at the four main corner pipes. Deck sweeps were easy to accomplish because the three structures had horizontal decks with railings. Other parts of the structures were also examined after the standard video sweeps were completed. Many more fish were seen than appeared in the video sweeps.

Fish identification and counting from video images are not a precise method. Some fish tended to track the submarine and remained continuously in view. Such fish were usually obvious and were not counted more than once. In the case of large schools, many fish were hidden behind others and could not be counted. Such encounters were simply called "schools" of fish. Schools that consisted of very small, unidentified fish were called "bait fish." Although not precise, the sweeps nevertheless were thought to provide a relative but crude measure of standing stock. Basic data, including depth, temperature, postdeployment age, material, substrate, and length of ship, as well as video fish counts, are given in table 1. Appendix A provides other observations regarding kinds of fish seen.

Submersible operations were conducted during calm, hot summer days from the 164.1 ft (50-m) R/V *Powell*. The S/V *Delta*, a 14.1 ft (4.3-m)-long submersible certified to a

diving depth of 1,312 ft (400 m), was deployed over the side with a hydraulic crane. The submarine is streamlined, with few protruding gadgets to become entangled in cables, nets, and other debris. Fortunately, most loose lines and cables had been stripped before the vessels were sunk, and there were no trawl nets. Lost fishing lines presented the greatest obstacles. Structures were remarkably easy to locate thanks to publicly available information provided by the Dade County Department of Environmental Resource Management. Artificial reef sites were located either by use of Loran C time differences (TD's) or by visual lineups between various buildings, water towers, and smokestacks on shore. A buoy was deployed once the structures were seen on the fathometer. The submersible simply followed the buoy line to the bottom, where the pilot either searched visually or used an onboard sonar. Most sites were sighted visually as soon as the submersible reached bottom. Visibility was never less than 75.5 ft (23 m) and was often greater than 98.4 ft (30 m). Because of time limitation, sites were chosen so as to evaluate a variety of structures, water depths, bottom types, construction materials, and postdeployment ages without wasting time during transit. There were many sites not visited because of time constraints.

Results and Discussion

In spite of variability inherent in our census technique, the counts, supplemented by other visual impressions, clearly showed that the most fish were on reefs in less than 147.7 ft (45 m) of water (table 1). The exceptions were the two deep Tenneco rigs that penetrate above the thermocline from approximately 196.9 ft (60 m) to 141.1 ft (43 m) and the hopper barge, which rests in its side and spans the column from 164.1 ft (50 m) to approximately 128.0 ft (39 m). Wrecks on rocky substrate appeared, in general, the most effective fish concentrators, but invariably they were in water shallower than 147.7 ft (45 m).

A thermocline was consistently encountered between 141.1 and 150.9 ft (43 and 46 m). From the surface down to approximately 141.1 ft (43 m), water temperature hovered around 86°F (30°C), whereas below 150.9 ft (46 m) the temperature was around 66°F (19°C). At 393.7 ft (120 m) on the liberty ship, water temperature was as low as 51°F (10.6°C). Temperatures above the thermocline are probably lower during winter months. Temperature regime along the western margin of the Florida Straits is highly variable (Walforal and Wicklund, 1968). Temperature below the thermocline can be as cold in September as in February, and depth to the thermocline can change due to horizontal wave-like meanders and eddy shedding of the northward-flowing Florida Current (Lee, 1975; Lee and Mayer, 1977; Lee and Mooers, 1977). We believe the combination of depth (light penetration)and low temperature below the thermocline had a greater effect on fish populations than did the substrate, because below 150.9 ft (46 m), small bait fish and marine tropicals, when present, appeared to be torpid, and thick algal encrustations, encrusting corals, sponges, gorgonians, and bryozoans, abundant on shallower wrecks, were absent.

The liberty ship (table 1 and appendix A), sunk in 393.7 ft (120 m) of water (figure 1), provided an example of extreme conditions. This was the only wreck where schools of amberjack (*Seriola dumerili*) were absent. The most abundant fish were flounders (Bothidae) lying on the muddy sand surrounding the ship. There were no algal encrustations, only pelecypod molluscs.

Two other ships, the *Sir Scott* in 219.8 ft (67 m) of water and the *Pioneer*, surrounded by

discarded service station tanks in 216.6 ft (66 m) of water, were also relatively ineffective concentrators of fish. Amberjacks were present on both wrecks, however, and some large Warsaw groupers (*Epinephelus nigritus*) were seen (appendix A). The tanks surrounding the *Pioneer* were totally devoid of fish.

On the other hand, shallow wrecks, in depths of less than 150.9 ft (46 m), such as *Blue Fire*, *Ultra Freeze*, and the *Narwal*, harbored huge schools of grunt, jacks (Carangidae), yellowtail snapper (*Ocyurus chrysurus*), hogfish (*Lachnolaimus maximus*), mutton snapper (*Lutjanus analis*), and various species of parrotfish (Scaridae). These ships were heavily encrusted with sponges, gorgonians, small corals, bryozoa, and abundant fleshy algae. Numerous fish bites were visible where fish had bitten algae from the underlying white-painted surfaces. These bite marks indicate that some primary feeders (i.e., herbivorous fish) were receiving direct sustenance from algae, which would not be present in deeper water.

Two structures were composed of wood, an unnamed mine sweeper and the small trawler, *Moby One*. Even though the mine sweeper was in 196.9 ft (60 m) of water, it nevertheless harbored large numbers of fish. Both ships were badly deteriorated, especially the mine sweeper, which had been immersed 195 months. Deterioration of wood produces numerous nooks and crannies, and the resulting debris is organic and consumable. Numerous wood-boring organisms, eaten by many fish, also infest the decaying wood. In places the mine sweeper appeared to be held together by intertwined calcareous tubes of the wood-boring worm *Toredo* sp. Wood structures, because of the additional space and food they provide during decay, may override effects of depth and low temperature. The *Moby One*, in 98.4 ft (30 m) of water and immersed only 50 months, was shrouded with schools of grunts (Haemulidae), gray snapper (*Lutjanus griseus*), and yellowtail snapper (*Ocyurus chrysurus*) too numerous to count. The youngest artificial reef examined (17 months) was the *Narwal*, yet it had greater concentrations of fish than many of the older, and especially the deeper, ships. There was no obvious meaningful correlation between time of immersion and number of fish detected in this study. Had there been reefs only a month or two old, there may well have been a detectable immersion time effect.

The two deep Tenneco rigs and the hopper barge can be put into a slightly different class of reef because they span both temperature and depth zones. Three of the five Tenneco rigs sit in an east-west line in approximately 98.4 ft (30 m) of water with their upper decks situated around 59.1 ft (18 m), well within scuba-diving depth. All three were visited by sport divers and spearfishermen during our dives. The center rig has a deck made of solid plate, whereas the other two have decks composed of steel grating. The grating was found to harbor numerous species of small marine tropicals. Seaman, Lindberg and Gilbert (1987) identified more than 45 species of typical reef-dwelling fish in and around the grating of these two platforms. There were noticeably fewer small tropicals on the platform with solid deck plating.

Although these rigs were shrouded with fish, the fish were for the most part quite small. We suspect that hook-and-line and spearfishing tend to keep the populations of large edible fish to a minimum. Note in table 1 that "normalized counts," given for shipwrecks, are not provided for the rigs.

The two deep rigs were considerably different than the shallow rigs. Because they rise from approximately 196.9 ft (60 m) to

141.1 ft (43-m) depths, scuba divers seldom dive there, and anglers find it difficult to anchor. Instead of resting on rocky bottom, as do the shallow rigs, these rest on rippled sand. Currents, minimal during our dive, range as high as 3 knots at this site. Large edible fish, such as Warsaw grouper, snowy grouper (*Epinephelus niveatus*), mutton and Cubrera snapper (*Lutjanus analis* and *L. cyanopterus*), were sighted on the bottom beneath both platforms. Around the top at 141.1 ft (43 m), there were barracuda (*Sphyraena barracuda*) and schooling amberjack and within the legs numerous angel (Chaetodontidae) and triggerfish (Balistidae). The upper surfaces near the top were coated with algae. Algae were absent near the bottom below the thermocline. The video sweeps show only what was present on the bottom and around the top; however, numerous fish make use of the entire vertical extent of the structure. Large vertical structures such as these make particularly attractive artificial reefs, as noted around oil rigs in the Gulf of Mexico (Shinn, 1974; Ditton and Auyong, 1984; Reggio, 1987).

The hopper barge was similar to the rigs because it lies on its port side and has a vertical relief of approximately 39.4 ft (12 m). The open hoppers allow unimpeded water circulation. Algae and other encrusters were abundant on the high starboard side but almost absent near the bottom at 164.1 ft (50 m). Fish were most abundant around the highest portion (appendix A).

The Miami sewer outfall proved to be one of the more interesting sites. Although it was impossible to make comparative video sweeps, the numbers and variety of fish observed were greater than at any other reef, including natural ones. Schooling fish included French grunts (*Haemulon flavolineatum*), pork fish (*Anisotremus virginicus*), spade fish (*Chaetodipterus faber*), amberjack (*Seriola dumerili*), horse-eye jack (*Caranx latus*), blue runners (*Caranx fusus*), barracudea (*Sphyraena barracuda*), Bermuda chubs (*Kyphosus sectatrix*), yellowtail (*Ocyurus chrysurus*) and grey snapper (*Lutjanus griseus*), and an occasional mutton snapper (*L. analis*) and hogfish (*Lachnolaimus maximus*). Sting rays (*Dasyatis americana*) and cobia (*Rachycentron canadum*), not seen elsewhere, were also observed. Typical tropical reef fish roamed the surrounding sponge- and algae-coated rocks. Damsels (*Pomacentridae*), rock beauties (*Holocanthus tricolor*), and both French (*Pomacanthus paru*) and queen angelfish (*Holocanthus ciliaris*) were common, to name a few.

Why fish should concentrate there is not understood. We attempted to observe feeding behavior, but no feeding could be detected. Fish never swam into the upwelling effluent. The brown translucent effluent (more than 90 percent of the solids are removed at the treatment plant) consists mainly of fresh water that rises vertically. Effluent does not mix with sea water until nearly reaching the surface. The bottom 49.2 ft (15 m) of the water column surrounding the outlets is clear, and visually the bottom looks like that typical of coral reefs, except for the rock rubble produced during digging of the trench that contains the main pipe. All the schooling fish appeared to be in an excited state, swimming rapidly back and forth. They may have been attracted by the sound of the rushing water, audible from inside the submersible, or by upwelling currents and turbulence created around the vertical effluent streams. The effluent creates a boil at the surface, 98.4 ft (30 m) above, and becomes entrained and diluted in the Gulf Stream current and carried northward. Fishermen avoid the boil (known as the "rose bowl") and downwind areas (usually the north and west sides) but anchor and fish the

southern margin. Thus, although there is fishing pressure, it is slightly to the south of the main fish concentrations. Divers never dive there.

Conclusions

1. Artificial reefs off south Florida have higher observed fish densities if placed in less than 147.7 ft (45 m) of water.

2. Temperature and depth are most important and probably override effects of substrate, although change from rock to sand closely coincides with the 147.7 ft (45-m) depth contour and the thermocline at the time of our observations.

3. Structures with high relief (such as oil rigs) are effective in water deeper than 147.7 ft (45 m), especially if they extend through the thermocline.

4. Wooden ships attract more fish than steel ships; however, they deteriorate more quickly.

5. Immersion time greater than 17 months has no noticeable effect on concentration efficiency.

Acknowledgments

This work was supported by a grant to the Caribbean Marine Research Center at Lee Stocking Island, The Bahamas, from the National Undersea Research Program, National Oceanic and Atmospheric Administration, U. S. Department of Commerce.

The authors thank Dr. Richard Slater and Doug Privitt for piloting the submersible and serving as keen observers. Field work benefited greatly from the assistance of Jack Kindinger and student Mike Topolovac. Our World Underwater, a scholarship society based in Chicago, provided the assistance of Mike Topolovac and Donna Schroeder. Donna Schroeder performed the video fish-counts. Joseph Fuhr drafted the figures. James Bohnsack, Robert B. Halley, J. Harold Hudson, and Dennis W. O'Leary critically reviewed the manuscript.

The authors are indebted to Barbara H. Lidz for editorial assistance during numerous stages of manuscript preparation. The authors also acknowledge Ben Mostkoff, Manager of the Artificial Reef Program for Dade County's Department of Environmental Resource Management office for his assistance and encouragement.

References Cited

Ditton, R. B. and J. Auyong. 1984. Fishing offshore platforms, central Gulf of Mexico: an analysis of recreational and commercial fishing use at 164 major offshore petroleum structures. OCS Monograph 84-0006. Metairie, La.: U.S. Dept. of the Interior, Minerals Management Service. Gulf of Mexico OCS Region. 158 pp.

Lee, T. N. 1975. Florida Current spin-off eddies. Deep Sea Res. 22:753-765.

_____ and D. A. Mayer. 1977. Low-frequency current variability and spin-off eddies along the shelf off southeast Florida. J. Mar. Res. 35:193-220.

_____ and C. N. K. Mooers. 1977. Near-bottom temperature and current variability over the Miami slope and terrace. Bull. Mar. Sci. 27:758-775.

Reggio, V. C., Jr. 1987. Rigs-to-Reefs: the use of obsolete petroleum structures as artificial reefs. OCS Report/MMS 87-0015. New Orleans: U.S. Dept. of the Interior. Minerals Management Service. Gulf of Mexico OCS Region. 17 pp.

Seaman, W., Jr., W. J. Lindberg, and C. R. Gilbert. 1987. Fish habitat provided by obsolete petroleum platforms off south Florida. In: Fourth interna-

tional conference on artificial habitats for fisheries, abstracts. Miami, Fla. p. 111.

Shinn, E. A. 1974. Oil structures as artificial reefs. In: Proceedings, First Artificial Reef Conference. Houston. Pp. 91-99.

Walford, L. A. and R. I. Wicklund. 1968. Monthly sea temperature structure from the Florida Keys to Cape Cod. Serial Atlas Mar. Environ., Folio 15, Am. Geographic Soc.

Appendix A

Tenneco

1. Barracuda, numerous bait fish and marine tropicals in deck grating. Hogfish near bottom. No schooling fish.

2. Numerous pelagic fish (amberjack, barracuda, bar jack [*Caranx ruber*], blue runner [*C. fusus*]) and bait fish schools. Fewer tropicals than on Tenneco No. 1.

3. Schools of amberjack, bar jacks, barracuda, bait fish, numerous tropicals in deck grating.

4. Snowy grouper, Warsaw grouper, mutton and Cubrera snapper, and amberjacks present.

5. Snowy grouper, two large Warsaw groupers, and school of bait fish.

Narwal

Many schools of bait fish, bar jacks, and goat fish (*Mulloidichthys martinicus*). Saw one grouper.

Rossmerry

School of amberjack above wreck. Overall, few fish seen and no algae on hull.

Mine Sweeper

Large school of amberjack and bait fish above wreck, schools of bait fish within wooden skeleton, two large Warsaw groupers. Ship decayed almost beyond recognition and visible portion is much shorter than 196.9 ft (60 m) when first sunk. Average elevation off bottom is 4.9 ft (1.5 m). Most intact part is transom which stands approximately 8 ft (2.4 m) high.

Liberty

Morays (Muraenidae), flounder (Bothidae), and numerous crabs on mud bottom. Small, slow-swimming bait fish along deck line. No algae on hull but encrusted with oysterlike bivalves. No amberjack, but some small groupers present. Warsaw groupers not seen, and water visibility was greater than 108.3 ft (33 m).

Moby One

School fish (grunts and gray snappers) so numerous that counting was not possible. Amberjack and barracuda overhead.

Hopper Barge

Large school of amberjack, horse-eye jack, bar jack, gray snapper, barracuda, and abundant growth on highest part of hull

Ultra Freeze

Schools of amberjack and horse-eye jacks following submersible, several African pompano, two large jewfish (*Epinephelus itajara*) living in dynamited hole in port stern section (one approximately 150 lb (68 kg), the other approximately 200-250 lb [90.7-113.4 kg]).

Star Trek

One large 85-lb (38.6 kg) Warsaw grouper and amberjack school above wreck. Ship lying on starboard side. Large school of horse-eye jacks (in side hull), bait fish schools, pompano, snapper, and two smaller Warsaw groupers also present.

Sir Scott

One Warsaw grouper. No schools of bait fish, but a small school of amberjack is present.

Pioneer and Tanks

Four Warsaw groupers at stern on highest point of ship. Amberjacks, but no bait fish. Tanks scattered around site were devoid of fish. Ship is lying on starboard side.

Blue Fire

Large schools of grunts (uncountable) and bait fish and many grunts inside hull. Several hogfish and small black grouper (*Mycteroperca bonaci*) on bottom near ship. Schools of amberjack and horse-eye jacks, three barracuda, numerous small yellowtail snapper swimming above wreck. Fish generally abundant.

Sewer Outfall

At 100 ft (30.5 m) too dark for video. Abundant fish in vicinity of 4 vertical outlets 3.3 ft (1 m) in diameter. See text for list of species.

Mr. Eugene Shinn is project chief at the U.S. Geological Survey Fisher Island research station and adjunct professor at the University of Miami Rosentiel School of Marine and Atmospheric Sciences. Mr. Shinn is a native of Florida and a graduate of the University of Miami. With over 100 publications in scientific journals to his credit, Mr. Shinn's major research interest focuses on the geology of coral reefs resulting from extensive investigations in the Florida Keys and the Arabian Gulf. Prior to his 13-year tenure with the U.S. Geological Survey, Mr. Shinn was a contributor to the First International Artificial Reef Conference held in New Orleans in 1974.

Mr. Robert I. Wicklund is director of the Caribbean Martime Research Center at Lee Stocking Island in the Exuma Islands, Bahamas, and adjunct professor at the Univeristy of South Carolina. He currently manages several mariculture projects, including studies of *Talapia*, grouper, and conch. Mr. Wicklund has played a key role in the NOAA National Undersea Research Program (NURP) and for many years served as site manager for the NOAA hydrolab project. Mr. Wicklund's primary interest are fishery conservation and enhancement of fisheries in undeveloped nations.

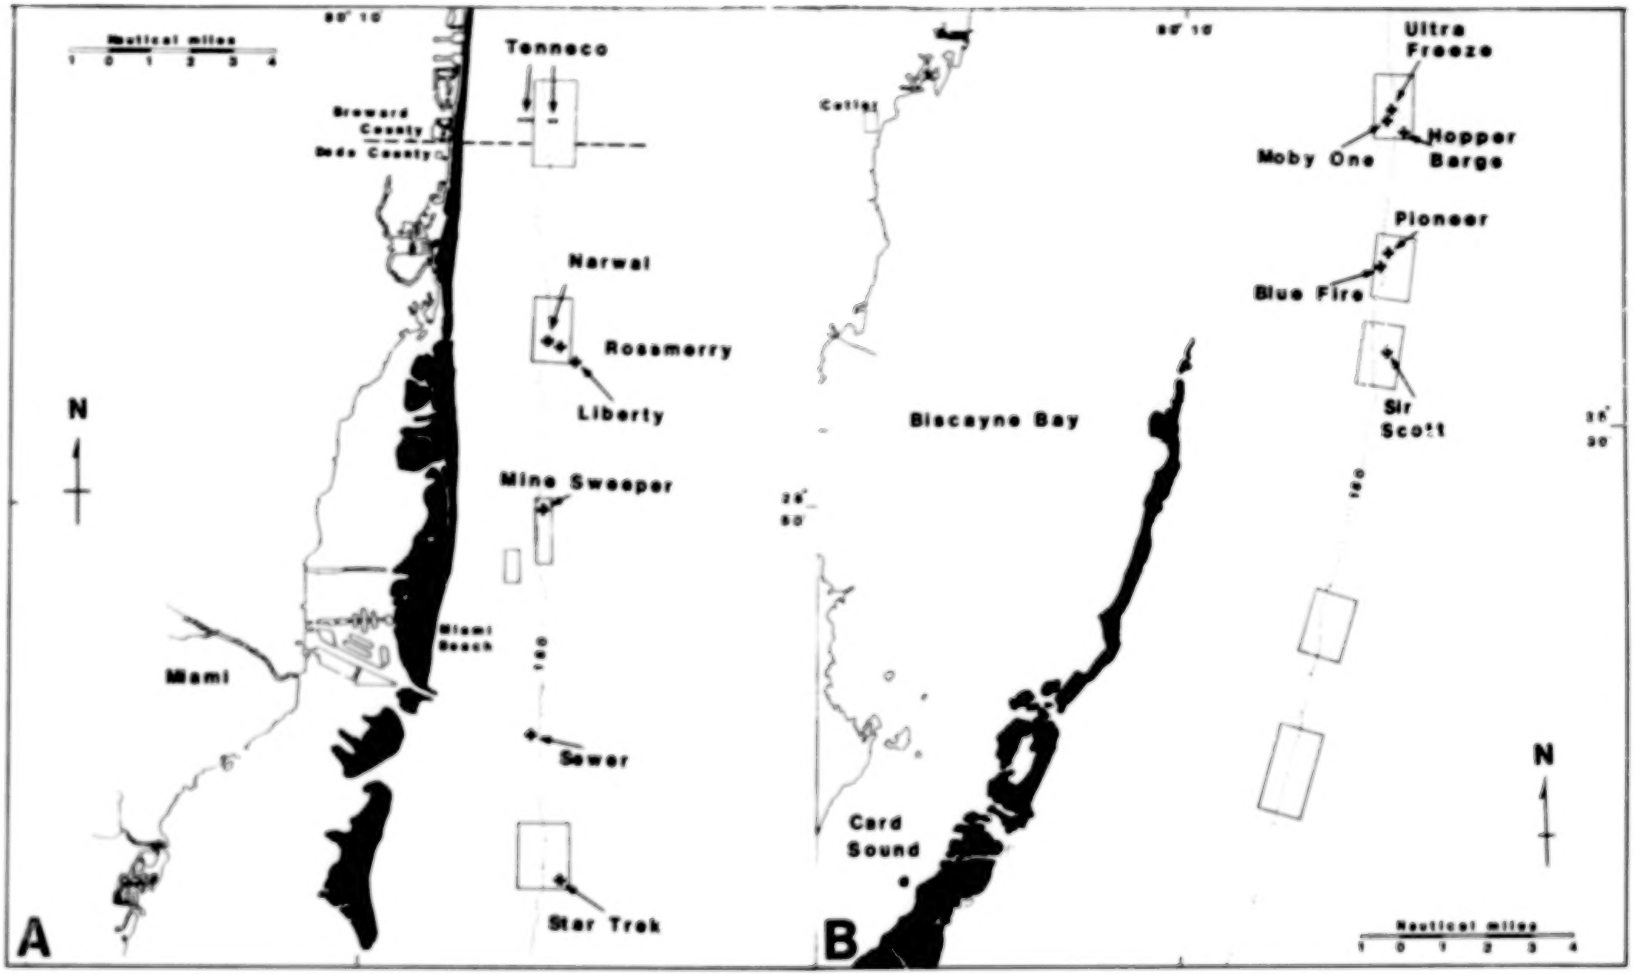

Figure 1. (A) Map of area off Miami and Key Biscayne (Dade County), Florida, showing designated artificial reef sites (rectangles) and names indicating locations of structures examined in this study. Map is modified from location map provided by Dade County. (B) South portion of study area (map connects directly with north portion shown in A). The 150.9-ft (46-m) contour is shown by a dotted line.

AS SUBMITTED BY AUTHOR

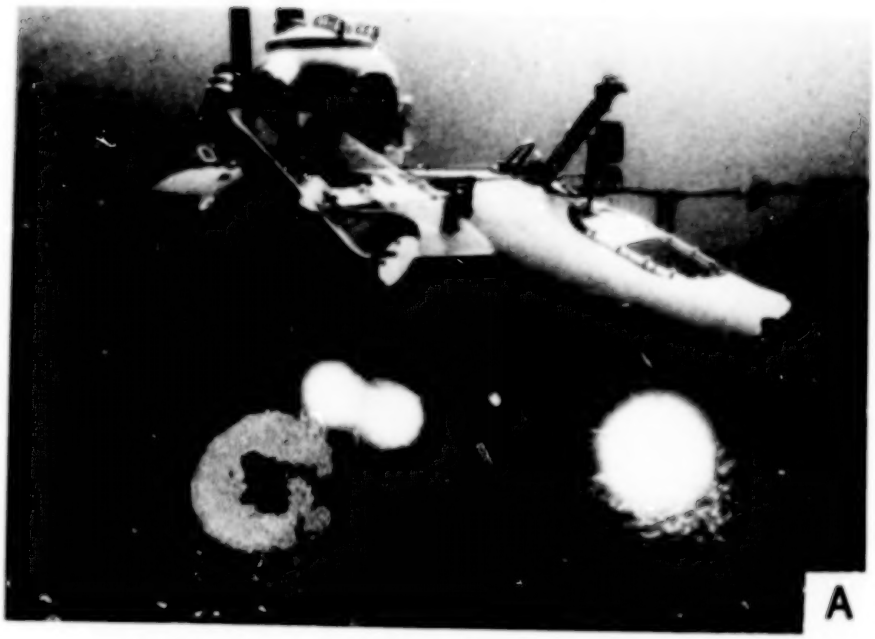

(A) Submersible Delta resting on open mesh deck of Tenneco rig. See figure 1 for location.

(B) View through forward ports of submersible Delta showing school of horse-eye jacks (Caranx latus) over deck of Ultra Freeze.

Figure 2.

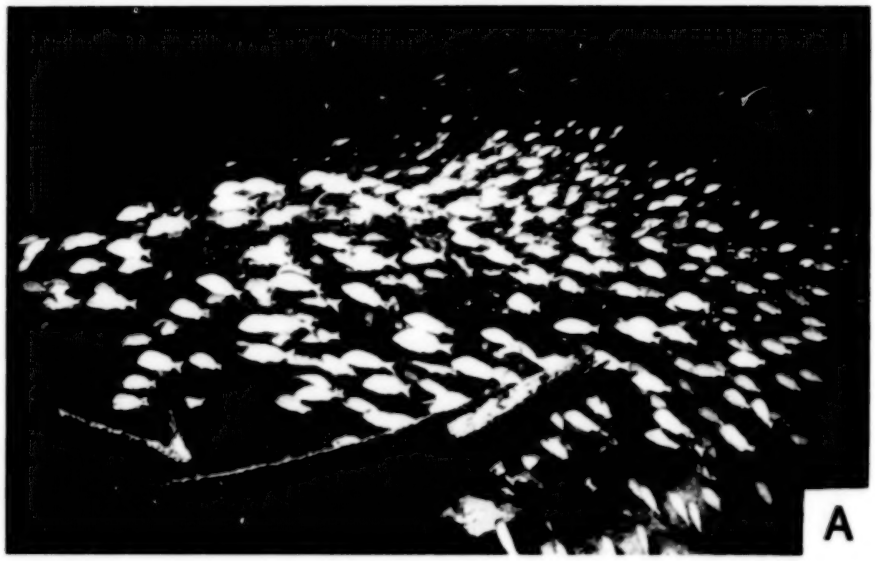

(A) School of grunts (Haemulidae) over the wooden ship Moby One.

(B) Horse-eye jack (Caranx latus around wheelhouse of Ultra Freeze. Two large jew fish (Epinephelus itajaara) occupy hull below wheelhouse.

Figure 3.

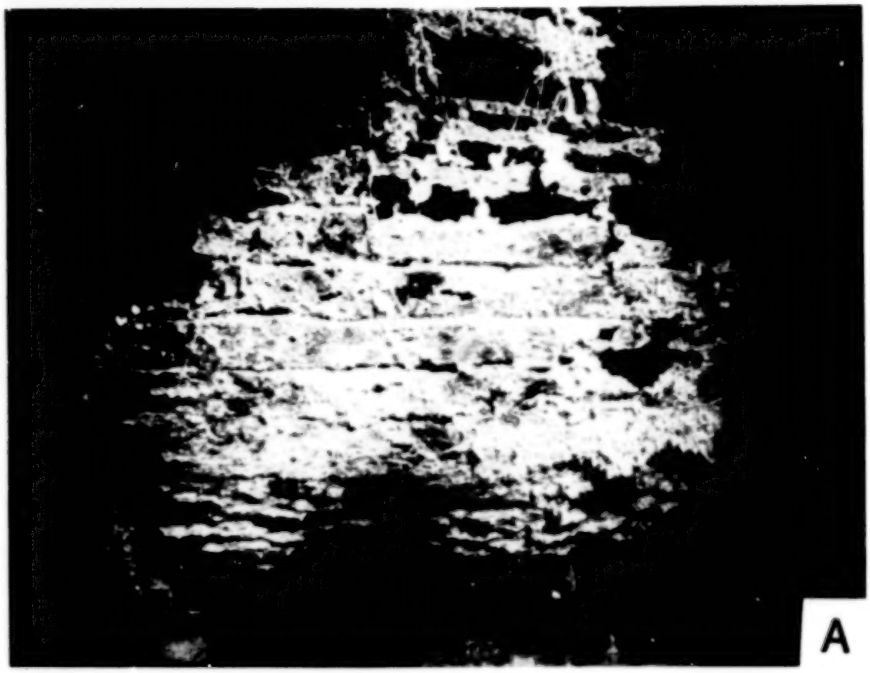

(A) Portion of the highly deteriorated wooden mine sweeper at depth of 190.3 ft. (58 m.). Note lost fishing lines.

(B) Large Warsaw grouper (Epinephelus nigritus) on mine sweeper.

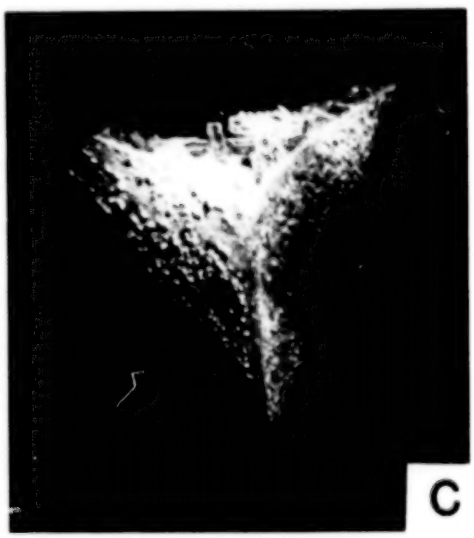

(C) Bow of liberty ship (depth 393.7 ft; 120m). Note encrustation of oysterlike pelecypods and general lack of fish. Four small unidentified "bait fish" can be seen just above bow.

Figure 4.

Table 1

Basic Data for All Sites Examined

(Under video profiles, fish counts for base and deck are given except where data were not available. To the right of the actual count, the column "Norm" is the normalized count or the actual count divided by the length of the sweep, which includes both sides of the ship [i.e., length of the ship x 2]. See Appendix A for comments.)

Site	Depth to Bottom (ft)	(m)	Material	Age (mo)	Bottom Temp (°C)	Length (ft)	(m)	Substrate	Video Profiles Base Count	Fish Norm	Deck Count	Fish Norm
Tenneco												
Rig 1	100	30	Steel	23	30		NA	Rock	8	-	35	-
Rig 2	100	30		23	30		NA	Rock	-	-	55	-
Rig 3	100	30		23	30		NA	Rock	-	-	115	-
Rig 4	200	60		23	30		NA	Sand	11	-	58	-
Rig 5	200	60		23	30		NA	Sand	26	-	17	-
Sewer	100	30	NA	-	30		NA	Rock	see text		see text	
Moby 1	100	30	Wood	50	30	75	23	Rock	100	-	100	-
Blue Fire	110	33	Steel	56	30	175	53	Rock	38	10.8	83	23.7
Narwal	115	35	Steel	17	30	137	42	Rock	91	33.2	55	20.0
Ultra Freeze	120	36	Steel	38	30	195	59	Rock	75	19.2	75	19.2
Hopper Barge	165	50	Steel	75	19	150	46	Sand	5	1.6	118	39.3
Mine Sweeper	190	58	Wood	195	19	177	54	Sand	54	15.0	109	30.7
Star Trek	210	64	Steel	62	19	200	61	Sand	9	2.2	12	3.0
Pioneer & Tanks	215	65	Steel	49	19	195	59	Sand	3	0.7	9	2.3
Sir Scott	220	67	Steel	31	19	267	81	Sand	14	2.6	22	4.1
Rossmerry	240	73	Steel	23	19	195	59	Sand	31	7.9	video fail	
Liberty	390	119	Steel	136	10.6	450	137	Mud	15	1.6		

173

BLANK PAGE

Panel on National and International Possibilities and Concerns Related to Use of Petroleum Structures for Fisheries Enhancement

Mr. Dana Larson
The Rigs-to-Reefs Company
Houston, Texas

The world community is currently discussing various interpretations of the legal requirements for removing redundant petroleum structures as presently mandated under the 1958 Geneva Convention on the Continental Shelf and as proposed under the Law of the Sea Treaty. An estimated 6,000 petroleum structures have been erected off the coasts of 40 countries with an estimated removal cost of $25 to $50 billion 1983 dollars. The United States has some 4,000 of these structures with estimated removal costs of $7.5 to $10 billion. These discussions are centered within the International Maritime Organization (IMO), which has the recognized world competence for setting standards for safety at sea and navigation.

Several of the agencies within the United States Government's delegation to the IMO deliberations were represented on the Panel. They included

- Captain Geoffrey R. Grieveldinger, Judge Advocate General's Corps, U.S. Navy, Department of Defense.
- Captain James Card, Chief of the Merchant Vessel Inspections and Documentation, U.S. Coast Guard, Department of Transportation.
- Gerald Rhodes, Chief, Rules, Orders, and Standards Branch, Minerals Management Service, Department of the Interior.
- William S. Griffin, Jr., Manager of Capital Budget and Project Analysis for the Exploration and Production Group of Phillips Petroleum Company.

The panel moderator, William P. Dubose, IV, Government Affairs Representative, National Ocean Industry Association, introduced the topic and speakers and encouraged audience discussion.

Captain Grieveldinger was the leadoff speaker and oriented the audience in regard to the complex background leading to the current discussions at the IMO Subcommittee on Safety of Navigation. The U.S. Navy has a great interest in national defense and surface and subsurface navigation.

Captain Card reported that the U.S. Coast Guard's involvement in the "Rigs-to-Reefs" effort is not limited to waters within the jurisdiction of the United States. The Coast Guard's responsibility to ensure the safety of navigation through the permit review process and its private aids to navigation program is important in carrying out the mandates set forth in the National Fishing Enhancement Act (NFEA) of 1984. However, as the agency acting as the official U.S. delegate to the IMO Subcommittee on Navigation, the Coast Guard also has the broader responsibility to present a position to that forum that will address the safety, economic, and environmental interests of the United States.

Jerry Rhodes' prepared statement emphasized the support of the Department of the Interior (DOI) for converting selected structures into artificial reefs as provided for under the NFEA. The DOI is concerned about the proper plugging of wells, the method of platform removal, and the impact of explosives upon endangered species and

marine mammals. The Section 7 consultations emphasize the fact that a platform constructed for oil and gas production creates an environment that biological communities quickly colonize. The recent toppling in place of a platform as a permitted reef in South Marsh Island Block 146 was recognized as being one of a few such instances that would occur in the Gulf.

Bill Griffin presented a slide show depicting the worldwide distribution of structures by geography and by water depth, the evolution of development of deepwater structures, and the economics of installation and removal. Most of his talk centered on the exceptionally large North Sea structures and their associated costs of removal. Only one structure has been removed from the North Sea and the costs were eight times greater than the installation costs of 13 years earlier.

After Panel members made introductory statements, Moderator Bill DuBose allowed some questions from the audience. Perhaps the most interesting questions centered on allocation quotas. Captain Grieveldinger responded that the current draft IMO paper proposed a maximum platform retention quota of two percent. Upon further questioning, he said the nations were currently discussing such issues as equitable means of allocating this two percent among countries, depths, purposes, economics, removal technologies, safety, etc.

Mr. Dana Larson is a retired Exxon employee who spent a large part of his career in environmental and regulatory affairs. In 1979 he was instrumental in the creation of the first preplanned oil and gas structure dedicated as an artificial reef off the west coast of Florida. Mr. Larson was responsible for the creation of the National Ocean Industry Association's Rigs-to-Reefs Committee and has served as its chairman since its inception more than eight years ago. In 1984 the Secretary of the Interior recognized him as the "Father of Rigs-to-Reefs" in America. Mr. Larson has been an international Rigs-to-Reefs consultant and holds the title of Vice President in The Rigs-to-Reefs Company.

As the Nation's principal conservation agency, the Department of the Interior has responsibility for most of our nationally owned public lands and natural resources. This includes fostering the wisest use of our land and water resources, protecting our fish and wildlife, preserving the environmental and cultural values of our national parks and historical places, and providing for the enjoyment of life through outdoor recreation. The Department assesses our energy and mineral resources and works to assure that their development is in the best interest of all our people. The Department also has a major responsibility for American Indian reservation communities and for people who live in Island Territories under U.S. Administration.

END

04/27/90